



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





L60 Series 0.230" (5.9mm) Watertight LED Panel Mount Indicator

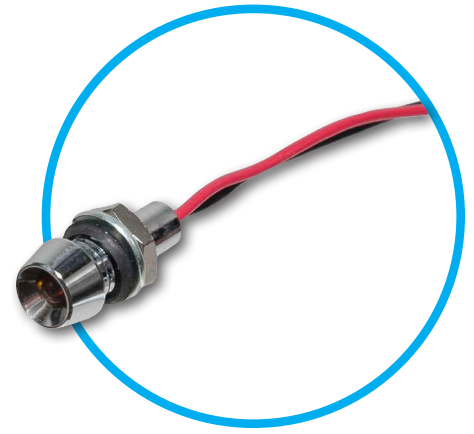

L60 Series offers a robust body with drip-proof protection in a small package

Applications

- automotive
- aerospace
- industrial
- instrumentation
- medical
- military
- mining
- outdoor
- safety
- transportation
- vending & gaming machines

Key features

- watertight
- tinted diffused LEDs
- reflective chrome-plated body
- 45° viewing angle
- mounting hardware provided
- 6" (152.4mm) wire leads, 24 AWG
- mounting hole 0.232" ±0.003" (5.9mm ±0.1mm)
- maximum panel thickness 0.070" (1.7mm)
- RoHS compliant

Product specifications

VCC Model Number	Output Color	Design Voltage / Current (Vf/If)	Max. Voltage / Current (Vf/If)	Typical Intensity (mcd)	Peak Wavelength (nm)
L60D-R5-W	RED	5VDC / 17mA	5.5VDC / 20mA	60	635
L60D-A5-W	AMBER	5VDC / 17mA	5.5VDC / 20mA	30	583
L60D-G5-W	GREEN	5VDC / 17mA	5.5VDC / 20mA	44	565
L60D-R12-W	RED	12VDC / 16mA	14VDC / 19mA	60	635
L60D-A12-W	AMBER	12VDC / 16mA	14VDC / 19mA	30	583
L60D-G12-W	GREEN	12VDC / 16mA	14VDC / 19mA	44	565
L60D-R28-W	RED	28VDC / 15.8mA	30VDC / 17.5mA	60	635
L60D-A28-W	AMBER	28VDC / 15.8mA	30VDC / 17.5mA	30	583
L60D-G28-W	GREEN	28VDC / 15.8mA	30VDC / 17.5mA	44	565

Dimensions

