



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



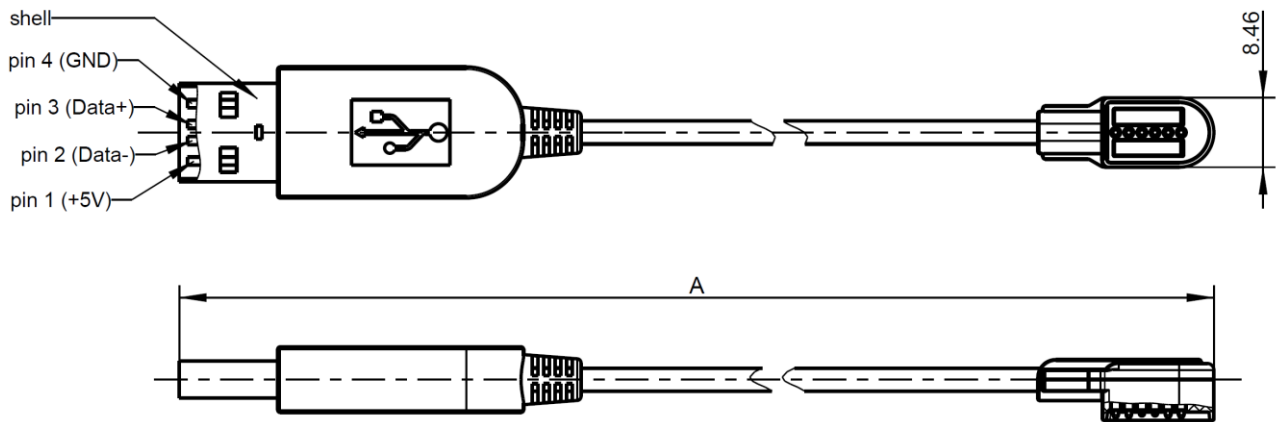

cable length [mm]			
Range length "A"	50 to 100	101 to 1000	1001 to 5000
Tolerance for "A"	±5	±10	±20

All dimensions are in mm; tolerances according to ISO 2768 C

**General Information**

MultiMag 6 cable assembly consisting of

Break-off plug with magnets  
Number and type of contacts

6 spring-loaded contacts

USB 2.0 cable  
USB-A connector

Color

White, similar RAL 9010

**Available Versions**

Type	Description
L99-029-XXX	Black, similar RAL 9005
L99-A0039-XXX	White, similar RAL 9010


"XXX" = coding for length "A" in mm

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

RF\_35/09.14/6.2

**Technical Data break-off plug**

Belegungsplan / pin and cable table		
USB 2.0 A	Kabel / cable	Magnet-schnittstelle magnetic interface
pin 1	Rot / red	pin 1
pin 2	Weiss / white	pin 2
pin 3	Grün / green	pin 3
pin 4	Schwarz / black	pin 4
pin 5	--- / shell	pin 5
pin 6	--- / shell	pin 6

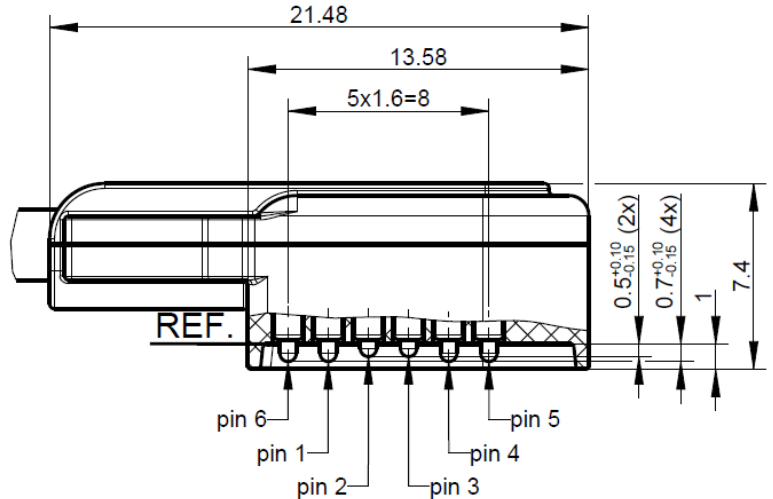

All dimensions are in mm; tolerances according to ISO 2768 C

**Interface**

Mating with

MultiMag 6 Receptacle

**Material and Plating break-off plug**

**Connector parts**

Housing bottom and top  
Magnets

**Material**

PC+ABS  
NdFeB

**Plating / Color**

White, similar RAL 9010  
Nickel plated

**Spring loaded contacts**

Piston  
Ferrule  
Spring

**Material**

Brass  
Brass  
Stainless steel wire

**Plating / Color**

Gold plated  
Gold plated

**Connectors**

USB-A

According to USB 2.0 specification


Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

RF\_35/09.14/6.2

**Cable**

USB 2.0 cable

According to USB 2.0 specification

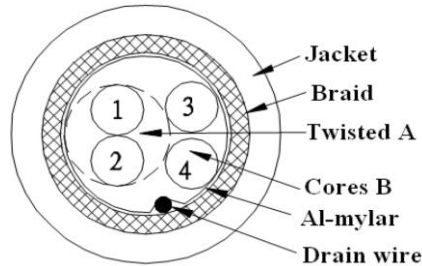

<b>Twisted pair (1, 2)</b> Stranded tinned copper wire with PE insulation	2x 28 AWG, Ø 0.40 mm Ø 0.80 mm, green and white
<b>Wire (3, 4)</b> Stranded tinned copper wire with PVC insulation	2x 28 AWG, Ø 0.40 mm Ø 0.80 mm, black and red
<b>Drain wire</b> Tinned copper	1x Ø 0.127 mm
<b>Foil coverage</b> <b>Braid shield</b>	Al mylar Tinned copper
<b>Jacket</b> TPE	Ø 3.40 mm

**Electrical Data**

Designed for USB 2.0 specification	5 V DC, 0.5 A
Maximum voltage	24 V DC
Maximum current	1 A
Test voltage	500 V DC
Insulation resistance	≥ 100 MΩ
Contact resistance	typically ≤ 50 mΩ

Dieses Dokument ist urheberrechtlich geschützt • This document is protected by copyright • Rosenberger Hochfrequenztechnik GmbH & Co. KG

RF\_35/09.14/6.2

**Mechanical Data**

Magnetic disengagement force average ~ 8 N  
 Mating cycles without load min. 5.000  
 Expected Mating cycles with load:

Max. Voltage	Max. Current	Mating cycles
5.0 V DC	0.5 A	min. 5.000
12.6 V DC	1.0 A	min. 2.000
24.0 V DC	0.5 A	min. 800

**Environmental Data**

Temperature range -20 °C to +65 °C  
 Magnets start losing their magnetic properties above 65 °C

**Compliance**

RoHS compliant



**Packing**

Standard 1 pc in plastic bag, 100 bags in box  
 Weight Depending on cable length

**Caution!**

**Magnets can impact the function of pace makers and implantable cardioverter-defibrillators (e.g. actuation of reed switch). Keep a minimum distance of 0.2 m (20 cm) between the magnetic connector and the implanted devices to prevent malfunction and danger to health.**

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
M. Portenkirchner	23.01.15	T. Scheuerlein	15.01.18	b00	18-s024	A.Schuster	15.01.18