



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




PART NUMBER	LCD-S801C42TR	REV.	B
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
04.17.07	E.C.N. #11148.		A
12.05.11	E.C.N. #10BRDR. & REDRAWN.		B

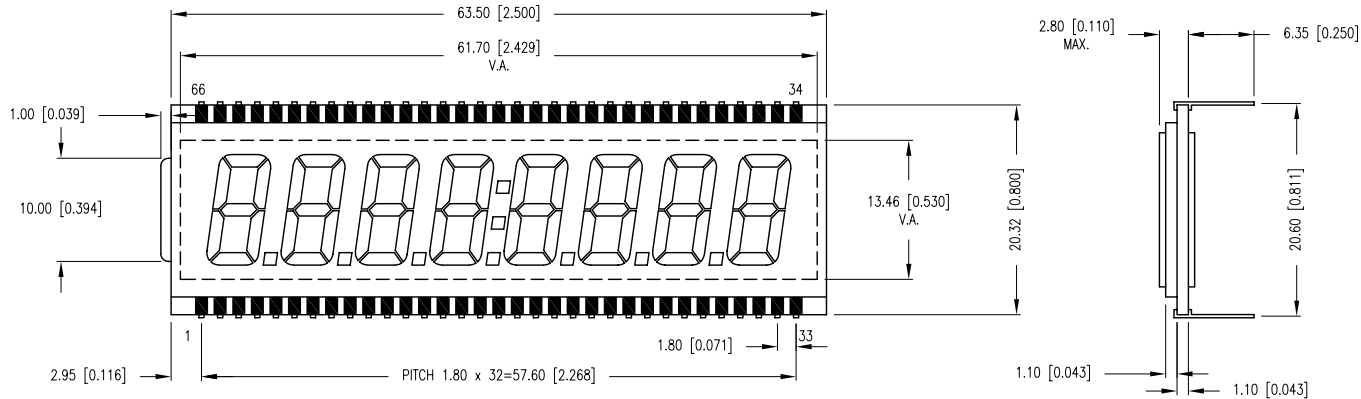

CHARACTERISTICS	
FLUID TYPE:	TN
BACKGROUND COLOR:	GRAY
VIEWING DIRECTION:	6:00
DISPLAY MODE:	REFLECTIVE
OPERATING VOLTAGE:	3.0~5.0V AC.
OPERATING TEMP.	0°C TO 50°C
STORAGE TEMP.	-20°C TO 70°C
DRIVING METHODE:	STATIC
CONNECTION TYPE:	66 PINS

CHARACTER DETAIL

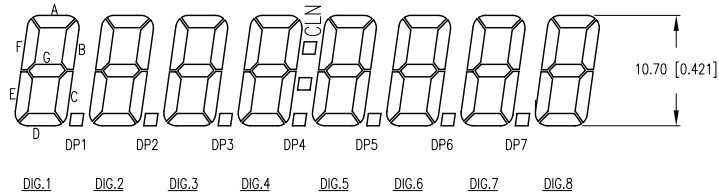

PIN NO.	1	2	3	4	5	6	7	8	9	10
SEGMENT	COM	1E	1D	1C	DP1	2E	2D	2C	DP2	3E
PIN NO.	11	12	13	14	15	16	17	18	19	20
SEGMENT	3D	3C	DP3	4E	4D	4C	DP4	5E	5D	5C
PIN NO.	21	22	23	24	25	26	27	28	29	30
SEGMENT	DP5	6E	6D	6C	DP6	7E	7D	7C	DP7	8E
PIN NO.	31	32	33	34	35	36	37	38	39	40
SEGMENT	8D	8C	8B	8A	8F	8G	7B	7A	7F	7G
PIN NO.	41	42	43	44	45	46	47	48	49	50
SEGMENT	6B	6A	6F	6G	5B	5A	5F	5G	CLN	4B
PIN NO.	51	52	53	54	55	56	57	58	59	60
SEGMENT	4A	4F	4G	3B	3A	3F	3G	2B	2A	2F
PIN NO.	61	62	63	64	65	66				
SEGMENT	2G	1B	1A	1F	1G	COM				

REPLACES PART #: LCD-S42C801TR

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRECISION ARE: X=±1 (±0.039), X.X=±0.5 (±0.020), X.XX=±0.25 (±0.010), X.XXX=±0.127 (±0.005). LEAD SIZE=±0.05 (±0.002), LEAD LENGTH=±0.75 (±0.030). MIN= +^{DECIMAL PRECISION} -0.00, MAX.= +^{DECIMAL PRECISION} -DECIMAL PRECISION

UNCONTROLLED DOCUMENT



290 E. HELEN ROAD
PALATINE, IL 60067-6976
PHONE: +1.847.359.2790
FAX: +1.847.359.6538
WEB: WWW.LUMEX.COM

0.42" CHARACTER HEIGHT, EIGHT DIGIT LCD GLASS, TN, REFLECTIVE, 66 PINS.

THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.

CONFIDENTIAL INFORMATION
THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

DATE:	12.05.11	DRAWN BY:	AB
PAGE:	1 OF 1	CHKD BY:	SS
SCALE:	NTS	APRVD BY:	KF
UNIT:	mm [INCH]		Ⓟ