

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








| THIS COPY | IS PROVIDED ON A | RESTRICTED BASIS AND IS NOT TO BE I | USED IN ANY WAY | DETRIMENT | TAL TO TH | IE INTEREST | S OF PANDUIT CORP. |
|---------------------|---------------------------------|--|-----------------|-----------|---------------------------|----------------------------------|--------------------|
| Materio | lk | High Conductivity Seamless Copper Tube | | | | | |
| Plating | | Electro-Tin | | | | | |
| Wire Siz | е | 6 STR/FLEX | | | | | |
| Wire Typ | oe | Stranded Copper: Class B & C, Compact, Class G, H, I, K, M, Locomotive | | | | | |
| Wire Str | ip Length | 9/16 in. | | | | PANDUIT © 6 STR/FLEX LCDX6-38D | |
| Stud Size | e | 3/8 in. | .62±.04 | | $\dagger \longrightarrow$ | NNC STR/F | |
| UL Listed Connec | | Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts. | .36±.04 | | - | 1.00±.02 | |
| UL Tem Rating | perature | 90° C | | | | 2 | FOL O/ |
| C.S.A C Wire Co | ertified onnector | Yes | | 7 | | 2. | 50±.06 |
| Panduit on Barre | t Color Code el | BLUE | | | | | |
| Panduit on Barre | Die Index No. el | P24 | | | | | |
| | te Industry ex No. () el | (7) | | | Wi | ire inspect | ion window |

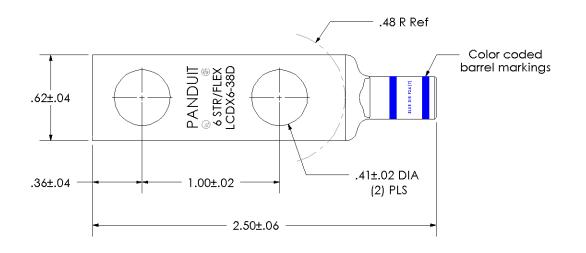

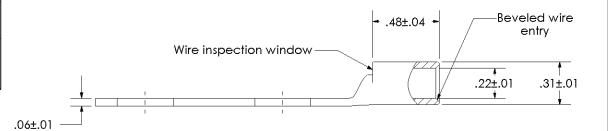





Wire Connector

| | | | | | | CORP. TINLEY PARK, ILLING |
|-----|------|------|------|--------------------------------------|-------|--|
| | | | | | | LCDX6-38D-L |
| 01 | 7/03 | TLCO | TLCO | REMOVED PANDUIT FROM BARREL MARKINGS | 10918 | Copper Lug - Two-Hole, Standard Flex Barrel |
| REV | DATE | BY | снк | DESCRIPTION | ECN | SCALE N/A DRAWING NO / CAD FILE LCDX6-38D-CUST |