

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







| THIS COPY IS PROVIDED | ON A RESTRICTED BASIS AND IS NOT TO BE I | SED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP. |
|------------------------------|--|--|
| Ma te ria l | High Conductivity Seamless Copper Tube | |
| Pla ting | Ele c tro -Tin | |
| Wire Size | 350 SIR/FLEX | 44 R |
| Wire Type | Stranded Copper. Class G, H, I, K, M, Locomotive | BANDUIT (S) 350 SIRV FIEX (LCDXN3560-38D) |
| Wire Strip Length | 1-3/8 in. | 1.00±.04 NA Sign of Sign o |
| Stud Size | 3/8 in. | |
| UL Liste d Wire Connector | Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts. | .38±.04 1.00±.0241±.02 (2) PIS |
| UL Temperature Rating | 90 ° C | 3.76±.06 |


 $Ye\,s$

BLUE

P76

(19)

| 35kv. ærfor tions than | |
|---------------------------------|--|
| | |
| | |
| | |
| | |
| | |

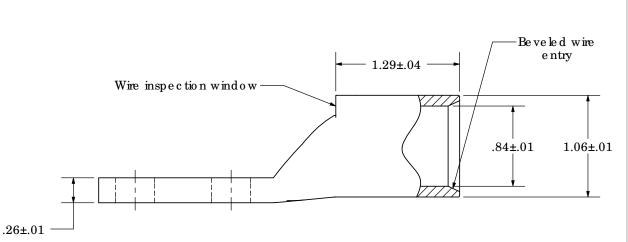

 $.44~\mathrm{R}\,\mathrm{Re}\,\mathrm{f}$

.41±.02 DIA

BLUE DIE P76 (19)

Cobrooded

barrel markings



C.S.A Certifie d

on Barrel

on Barrel

Wire Connector

Panduit Color Code

Panduit Die Index No.

Alternate Industry Die Index No.() on Barrel



| | | | | | | CORP. TINLEY PARK, ILLINO IS |
|-----|------|------|------|--|-----|---|
| 02 | 1/11 | JHNU | JHNU | REVISED O VERAIL LENGTH: WAS 3.74 REVISED TO NG UE THIC KNESS: WAS .22 | | ICDXN350-38D-6 Copper Lug - Namow Tongue, Two-Hole, Standard Flex Barrel |
| REV | | ВҮ | СНК | DESCRIPTION | ECN | SCALE N/A DRAWING NO / CAD FILE IC DXN350-38D-C UST |