



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



ALL DIMENSIONS ARE IN mm

Part Number	Class 2r Wire Size	Class 5f & 6f Wire Size	Stud Size	Wire Strip Length	Panduit Die Index No. For Class 2r Wire Circumferential Dies	Panduit Die Index No. For Class 5f & 6f Wire Circumferential Dies	Panduit Die Index No. For Class 5f & 6f Wire Nest/Indentor Dies	l ±2.76	o ±.50	i ±.50	a ±2.25	m (ref)	n ±1.25	d ±.50	b ±1.25	t
LCMB10-5-L	10 mm ²	-----	M5	25.6	P21	-----	-----	43.8	6.20	4.50	24.0	9.8	6.0	5.50	11.0	1.20 ± .35
LCMB10-6-L	10 mm ²	-----	M6	25.6	P21	-----	-----	43.8	6.20	4.50	24.0	9.8	6.0	6.60	11.0	1.20 ± .35
LCMB10-8-L	10 mm ²	-----	M8	25.6	P21	-----	-----	43.8	6.20	4.50	24.0	8.5	8.0	9.00	13.0	1.05 ± .35
LCMB10-10-L	10 mm ²	-----	M10	25.6	P21	-----	-----	43.8	7.14	4.36	24.0	8.5	8.0	11.00	14.5	1.65 ± .35
LCMB16-5-L	16 mm ²	10 mm ²	M5	28.8	P21	P21	-----	47.2	7.20	5.50	27.2	10.3	6.5	5.50	13.0	1.26 ± .40
LCMB16-6-L	16 mm ²	10 mm ²	M6	28.8	P21	P21	-----	47.2	7.20	5.50	27.2	10.3	6.5	6.60	13.0	1.26 ± .40
LCMB16-8-L	16 mm ²	10 mm ²	M8	28.8	P21	P21	-----	47.2	7.20	5.50	27.2	10.3	6.5	9.00	13.0	1.20 ± .40
LCMB16-10-L	16 mm ²	10 mm ²	M10	28.8	P21	P21	-----	49.4	7.20	5.50	27.2	10.2	8.0	11.00	15.0	1.10 ± .40
LCMB25-6-L	25 mm ²	16 mm ²	M6	28.3	P29	P21	-----	48.7	8.80	6.90	26.7	10.0	8.0	6.60	14.0	1.60 ± .40
LCMB25-8-L	25 mm ²	16 mm ²	M8	28.3	P29	P21	-----	48.7	8.80	6.90	26.7	10.0	8.0	9.00	15.5	1.60 ± .40
LCMB25-10-L	25 mm ²	16 mm ²	M10	28.3	P29	P21	-----	48.7	8.80	6.90	26.7	10.0	8.0	11.00	15.5	1.50 ± .40

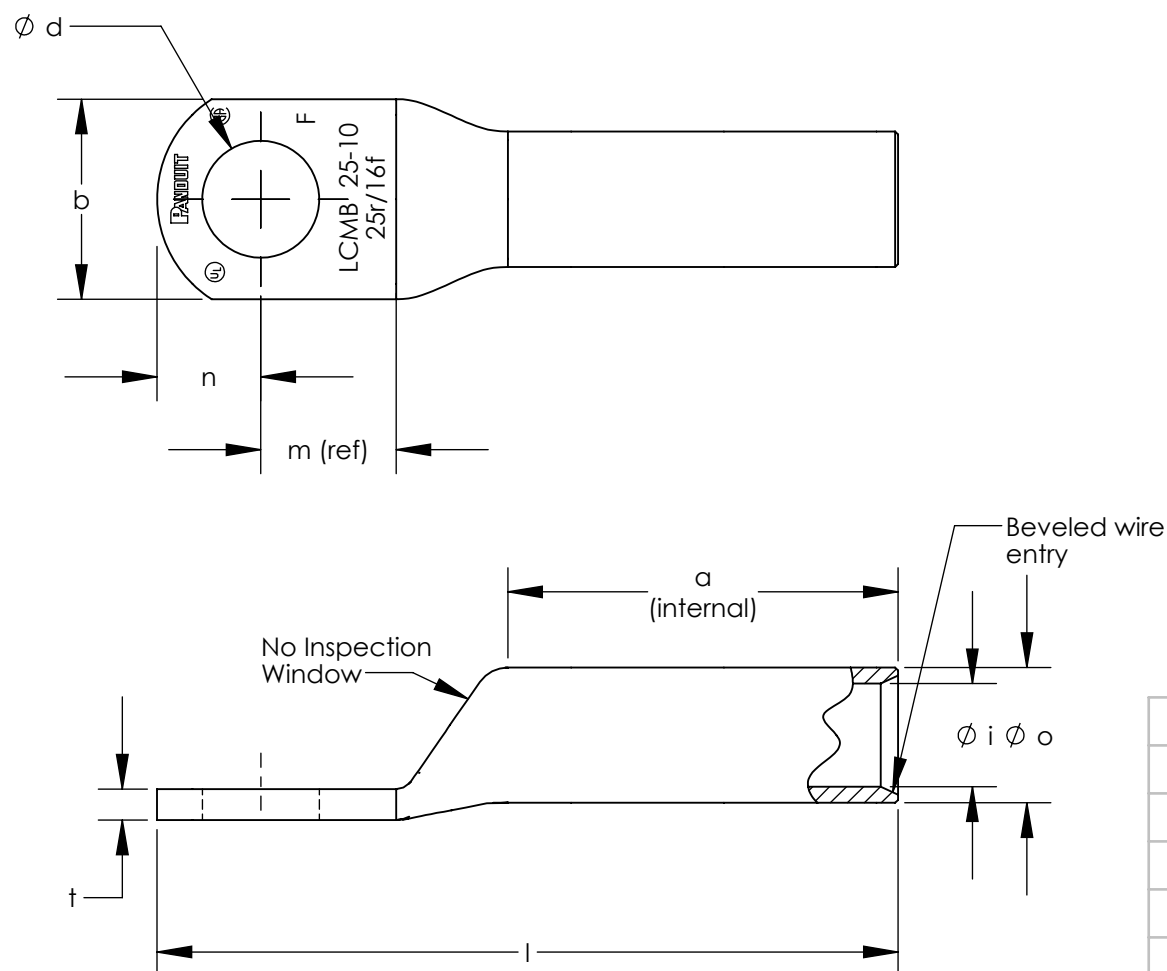

- NOTES:
1. Material: High conductivity seamless copper tube.
 2. Plating: Parts are annealed and tin plated.
 3. Wire Type: Class 2r, 5f & 6f Stranded Copper per DIN VDE 0295, IEC 60228 and HD 383.
 4. UL Listed Wire Connector: Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
 5. UL Temperature Rating: 90° C
 6. C.S.A. Certified Wire Connector: Yes
 7. Parts are CE and tested per EN 61238-1:2003/IEC 61238-1:2003 Class B, with Class 2r wire 10mm² - 25mm².

REV	DATE	BY	CHK	APR	DESCRIPTION	ECN
00	7/13	JHNU	TLCO	RGB	DRAWING RELEASED	12J036BH-JC

TITLE		METRIC LUGS - LCMB ONE HOLE SERIES 10-25mm LONG BARREL CUSTOMER DRAWING	
ITEM REVISION NAME	12J036BH/00		
DATASET FILE NAME	12J036BH-JC/00.SLDDRW		
UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm]		MATERIAL	
.X ±	.XXX ±	SEE NOTES	
.XX ±	ANGLES ±	DRAWING NUMBER	
THIRD ANGLE PROJECTION		12J036BH-JC	
DRAWN BY	DATE	CHK	SCALE
JHNU	7/13	TLCO	NONE
SHEET 1 OF 1			SIZE
			B