



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



ALL DIMENSIONS ARE IN mm													
Part Number	Class 2r Wire Size	Class 5f & 6f Wire Size	Wire Strip Length	Panduit Die Index No. For Class 2r Wire Circumferential Dies	Panduit Die Index No. For Class 5f & 6f Wire Circumferential Dies	Panduit Die Index No. For Class 5f & 6f Wire Nest/Indentor Dies	$l \pm 2.76$	$o \pm .50$	$i \pm .50$	$a \pm 2.25$	$c \pm 2.25$	$b \pm 2.25$	t
LCMC10-00-L	10 mm <sup>2</sup>	-----	25.6	P21	-----	-----	87.8	7.14	4.36	24.0	61.0	14.5	1.65±.35
LCMC16-00-L	16 mm <sup>2</sup>	10 mm <sup>2</sup>	28.8	P21	P21	-----	93.9	7.60	5.50	27.2	62.7	15.0	1.50±.40
LCMC25-00-L	25 mm <sup>2</sup>	16 mm <sup>2</sup>	28.3	P29	P21	-----	101.2	10.40	7.14	26.7	70.5	20.0	2.30±.40
LCMC35-00-Q	35 mm <sup>2</sup>	25 mm <sup>2</sup>	34.4	P29	P29	-----	107.8	11.00	8.20	32.8	70.5	21.5	2.00±.40
LCMC50-00-E	50 mm <sup>2</sup>	35 mm <sup>2</sup>	38.2	P37	P33	-----	110.8	12.30	9.80	36.6	69.5	23.0	1.80±.40
LCMC70-00-X	70 mm <sup>2</sup>	50 mm <sup>2</sup>	39.6	P45	P37	-----	112.7	14.20	11.50	38.0	70.5	20.8	2.80±.40
LCMC95-00-X	95 mm <sup>2</sup>	70 mm <sup>2</sup>	44.6	P54	P45	P62/4	123.5	16.50	13.50	43.0	73.0	24.5	2.90±.40
LCMC120-00-X	120 mm <sup>2</sup>	95 mm <sup>2</sup>	41.3	P62	P50	P76/4	124.7	18.60	15.20	39.7	74.5	27.5	3.40±.45
LCMC150-00-X	150 mm <sup>2</sup>	120 mm <sup>2</sup>	58.6	P66	-----	P76/4	148.0	21.00	16.50	57.0	83.0	30.5	4.30±.45
LCMC185-00-X	185 mm <sup>2</sup>	150 mm <sup>2</sup>	57.9	P76	-----	P76/4	149.6	23.00	18.60	56.3	83.0	33.5	4.40±.50
LCMC240-00-6	240 mm <sup>2</sup>	185 mm <sup>2</sup>	65.1	P87	-----	P87/4	159.5	26.00	20.80	63.5	85.0	37.5	5.20±.50
LCMC300-00-6	300 mm <sup>2</sup>	240 mm <sup>2</sup>	70.0	P94	-----	P106/6	167.1	29.00	23.50	68.4	86.5	42.5	5.30±.55
LCMCX300-00-6	-----	300 mm <sup>2</sup>	74.6	-----	-----	P32/6	179.7	33.00	26.20	73.0	94.5	48.0	6.70±.55
LCMC400-00-6	400 mm <sup>2</sup>	-----	66.8	P106	-----	-----	171.9	34.50	27.00	65.2	94.5	49.5	7.50±.55
LCMC500-00-3	500 mm <sup>2</sup>	-----	77.8	P125	-----	-----	194.2	40.00	31.00	76.2	98.5	57.5	8.90±.55
LCMC630-00-3	630 mm <sup>2</sup>	-----	85.9	P125	-----	-----	203.6	44.00	34.50	84.3	100.5	63.0	9.40±.65

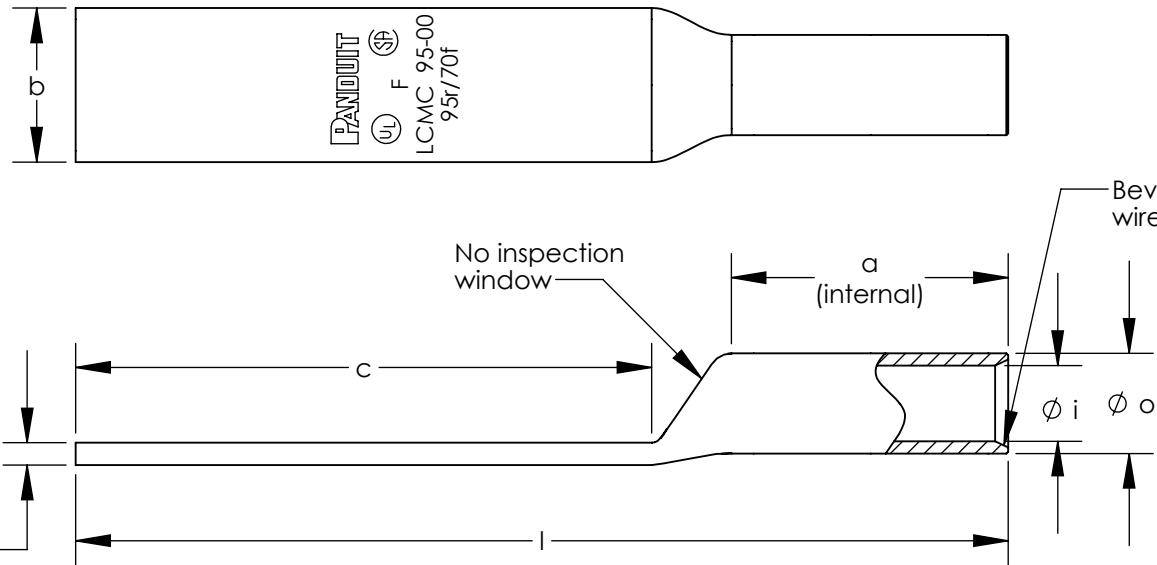

- NOTES:
1. Material: High conductivity seamless copper tube.
  2. Plating: Parts are annealed and tin plated.
  3. Wire Type: Class 2r/5f & 6f Stranded Copper per DIN VDE 0295, IEC 60228 and HD 383.
  4. UL Listed Wire Connector: Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
  5. UL Temperature Rating: 90° C
  6. C.S.A. Certified Wire Connector: Yes
  7. Parts are CE and tested per EN 61238-1:2003/IEC 61238-1:2003 Class B, with Class 2r wire 10mm<sup>2</sup> - 240mm<sup>2</sup>.



							<b>TITLE</b> <b>METRIC LUGS - LCMC BLANK TONGUE SERIES</b> <b>10-630mm LONG BARREL</b> <b>CUSTOMER DRAWING</b>		
							ITEM REVISION NAME 12J036BL/00 DATASET FILE NAME 12J036BL-JC/00.SLDDRW		
							UNLESS OTHERWISE SPECIFIED, DIMENSIONAL TOLERANCES ARE: IN [mm] .X ± .XXX ± .XX ± ANGLES ±		
							THIRD ANGLE PROJECTION 		
00	7/13	JHNU	TLCO	RGB	DRAWING RELEASED		12J036BL-JC		
REV	DATE	BY	CHK	APR	DESCRIPTION		ECN		
							DRAWN BY JHNU DATE 7/13 CHK TLCO SCALE NONE SHEET 1 OF 1 SIZE B		