

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China








THIS COPY IS PROVIDED ON A RESTRICTED BASIS AND IS NOT TO BE USED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.	
THIS COFF IS FROVIDED ON A RESTRICTED DASIS AND IS NOT TO BE USED IN ANY WAT DETRIMENTAL TO THE INTERESTS OF FAMOUN CORF.	

ALL DIMENSIONS ARE IN (mm)											
Part Number	Wire Size	Wire Class	Wire Strip Length	*UL Listed Stud Hole Diameter Size Range (1 or 2 Stud Holes)	l ±2.76	o ±.50	i ±.50	a ±2.25	С	b	t
LCMDX10-00-Q	10 mm ²	5f & 6f	16.0	5.50 - 11.0	81.2	7.20	5.50	14.5	62.7±1.25	15.0±1.25	1.10±.40
LCMDX16-00-Q	16 mm²	5f & 6f	16.5	5.50 - 11.0	89.5	9.52	7.14	15.0	70.5±1.25	20.0±1.25	1.60±.40
LCMDX25-00-Q	25 mm ²	5f & 6f	19.0	6.60 - 11.0	92.5	10.40	8.20	17.5	70.5±2.25	21.5±2.25	1.50±.40
LCMDX35-00-Q	35 mm²	5f & 6f	21.8	6.60 - 14.0	94.5	12.30	9.80	20.3	69.5±2.25	23.0±2.25	1.80±.40
LCMDX50-00-X	50 mm ²	5f & 6f	24.8	6.60 - 14.0	98.0	14.20	11.50	23.3	70.5±2.25	20.8±2.25	2.80±.40
LCMDX70-00-X	70 mm²	5f & 6f	26.0	6.60 - 14.0	105.0	16.50	13.50	24.5	73.0±2.25	24.5±2.25	2.90±.40
LCMDX95-00-X	95 mm²	5f & 6f	26.0	9.0 - 18.0	109.5	18.60	15.20	24.5	74.5±2.25	27.5±2.25	3.40±.45
LCMDX120-00-X	120 mm ²	5f & 6f	29.0	9.0 - 18.0	118.5	21.00	16.50	27.5	83.0±2.25	30.5±2.25	4.30±.45
LCMDX150-00-X	150 mm ²	5f & 6f	29.7	9.0 - 22.0	121.5	23.00	18.60	28.2	83.0±2.25	33.5±2.25	4.40±.50
LCMDX185-00-X	185 mm ²	5f & 6f	36.5	11.0 - 22.0	131.0	26.00	20.80	35.0	85.0±2.25	37.5±2.25	5.20±.50
LCMDX240-00-5	240 mm ²	5f & 6f	41.8	11.0 - 22.0	139.0	29.00	23.50	40.3	86.5±2.25	42.5±2.25	5.30±.55
LCMDX300-00-5	300 mm ²	5f	46.3	11.0 - 22.0	151.5	33.00	26.20	44.8	94.5±2.25	48.0±2.25	6.70±.55

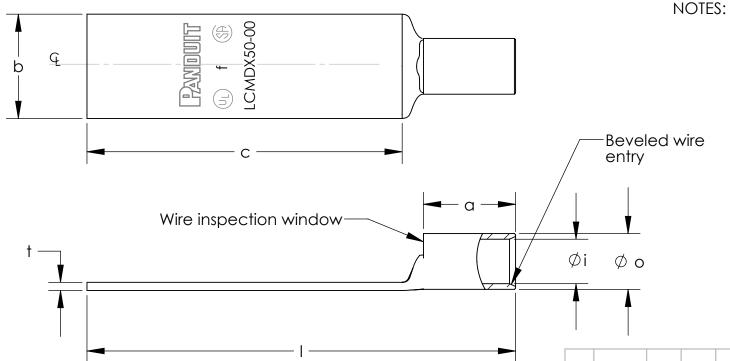

- NOTES: 1. Material: High conductivity seamless copper tube.
 - 2. Plating: Parts are annealed and tin plated.
 - 3. WireType: Class 5 and 6 Flexible Stranded Copper Conductor per DIN VDE 0295, IEC 60228, and HD 383.
 - 4. UL Listed & CSA Certified Wire Connectors for applications up to 35kv, when crimped per instruction sheet included with Panduit packaging. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.
 - 5. UL & CSA Temperature Rating: 90°C
 - 6. *Stud holes to be centered along the centerline of the tongue (palm).





										STED /ire Connector	
									NDUIT CORP.	TINLEY PARK, ILLIN	10IS
									LEX LUGS - LCMDX SERIES CUSTOMER DR	10-300mm ² BLANK TON	
								DIMEN	SS OTHERWISE SPECIFIED SIONAL TOLERANCES ARE: X) ± (.XXX) ± XX) ± ANGLES ±	UNLESS OTHERWISE SPE ALL DIMENSIONS ARE GI INCHES, THIRD ANGLE PRO	IVEN IN
								DRAWN BY TLCO	MAT'L: SEE	SCALE NONE	
00	11/12	TLCO	TLCO	Drawing released	10N014BD-NC	RGB	RGB	DATE 5/11	NOTES	DRAWING NO / CAD FILE	DWG B
REV	DATE	DATE BY CHK		DESCRIPTION	ECN	-R	SUP	CHK'D TLCO	ABOVE	10N014BD-NC	SIZE