



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# LDD240-WU

## 240W DIN Rail DC-DC Converter Wide Input with Programmable Output

This LDD240-WU DC/DC converter is the optimal response to the applications where compactness and high reliability are requested. It is isolated and offers a wide range of input and output voltages.

Simple but elegant look and ease of installation make it ideal for various industrial applications.



### Key Features & Benefits

- Up to 240 W output power (voltage dependent)
- Converts any voltage between 11 V and 55 V to any voltage between 5 V and 55 V
- High efficiency and compact size
- Constant current or hiccup mode limitation, user settable
- Digital Power regulation
- Isolated topology (4.2 kVDC)
- Modbus over USB interface for control and monitoring
- Multiple protections integrated
- Parallelable for power or redundancy (integrated ORing circuitry)

### Applications

- Industrial machine control
- Process control
- Energy management
- Remote control systems

## 1. MODEL SELECTION

MODEL	INPUT VOLTAGE	INPUT CURRENT	OUTPUT VOLTAGE	OUTPUT CURRENT
LDD240-WU	12 - 48 VDC (11 - 55 VDC)	12 A	5 - 55 VDC	10 A

## 2. INPUT SPECIFICATIONS

Technical parameters are typical, measured in laboratory environment at 25°C and 24 VDC input and output voltage, at nominal values, after minimum 5 minutes of operation.

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Input DC Voltage Range	Rated Operating	12 - 48 VDC 11 - 55 VDC
Input DC Current	Rated	12 A
Protections	Input Overvoltage > 60 V active shutdown Reverse polarity Fuse 20 A mini ATO blade (not user replaceable)	
Recommended External Protection	Use DC rated devices	20 A Fuse or MCB 20 A C curve

## 3. OUTPUT SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Output Power		240 W
Rated Voltage / Adjustable Voltage Range		5 - 55 VDC
Continuous Current / Power		10 A / 240 W (see Figure 1)
Overload Limit in Constant Current Mode		11 A / 264 W (see Figure 1)
Overload Limit in Hiccup Mode (max. 5s)		15 A / 360 W (see Figure 1)
Short Circuit Peak Current		18 A
Load Regulation		≤ 4% @ 5 VDC, ≤ 2% @ 12 VDC, ≤ 1.5% @ ≥ 24 VDC
Ripple & Noise <sup>1</sup>		≤ 200 mVpp
Hold up Time		≥ 5 ms
Protections	Overload and short circuit: Constant current or Hiccup mode (user settable) Thermal protection Output overvoltage	
Output Over Voltage Protection		120% of Vout active self-tracking
User Interface	7 segment, 2 digit display 3 programming keys DC OK - dry contact (NO, 24 VDC / 1 A) Modbus over USB interface	
Parallel Connection <sup>2</sup>	Possible for power or redundancy with integrated ORing circuitry	
Efficiency		77% - 92% (depending on Vin / Vout)
Dissipated Power		< 28 W (depending on Vin / Vout)

<sup>1</sup> Ripple and Noise are measured with 20 MHz bandwidth, probe terminated with a 0.1 µF MKP parallel capacitor.

<sup>2</sup> Pay attention, set the operating mode to "parallel" when connecting more units in parallel, see Instruction Manual for details.

**NOTE:** Power rating, losses, efficiency, ripple, thermal behaviour and start-up may change outside of the nominal rated input range. Contact factory for details.

#### 4. ENVIRONMENTAL, EMC & SAFETY SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION	
Operating Temperature <sup>3</sup>	Overtemperature protection	- 40 to + 70°C	
Storage Temperature		- 40 to + 80°C	
Derating	Depending on Vin and Vout over 60°C (See Figure 2)		
Humidity	Non-condensing	5 - 95% RH	
Life Time Expectancy	At 25°C ambient, full load	180 542 h (20.61 years)	
Overvoltage Category		I (EN50178)	
Pollution Degree		2 (IEC60664-1)	
Protection Class		Class I	
Isolation Voltage	Input to Output Input to Ground Output to Ground	4.2 kVDC 2,2 kVDC 0.75 kVDC	
Safety Standards & Approvals	UL508 (reference) EN60950 (reference)		
EMC Standards	Emission	Class B	
	Immunity	EN55022 (CISPR11)	Class B
		EN55011 (CISPR22)	Level 3
		EN61000-4-2	Level 3
		EN61000-4-3	Level 2
EN61000-4-4	Level 2		
EN61000-4-5	Level 2		
Protection Degree	EN60529	IP20	
Vibration Sinusoidal	IEC 60068-2-6	5-17.8 Hz: ±1.6 mm; 17.8-500 Hz: 2 g 2Hours / axis (X,Y,Z)	
Shock	IEC 60068-2-27	30 g 6 ms, 20 g 11 ms; 3 bumps / direction, 18 bumps total	

<sup>3</sup> Start-up type tested: - 40°C, possible at nominal voltage with load derating

#### 5. MECHANICAL SPECIFICATIONS

PARAMETER	DESCRIPTION / CONDITION	SPECIFICATION
Weight		400 g
Dimensions		40 x 115 x 110 mm
Mounting Rail		IEC 60715/H15/TH35-7.5(-15)
Connection Terminals	Screw type pluggable (24 - 12 AWG)	2.5 mm <sup>2</sup>
Communication Interface Connector	Mini USB-B Type (virtual Com Port)	
Case Material	Aluminum	

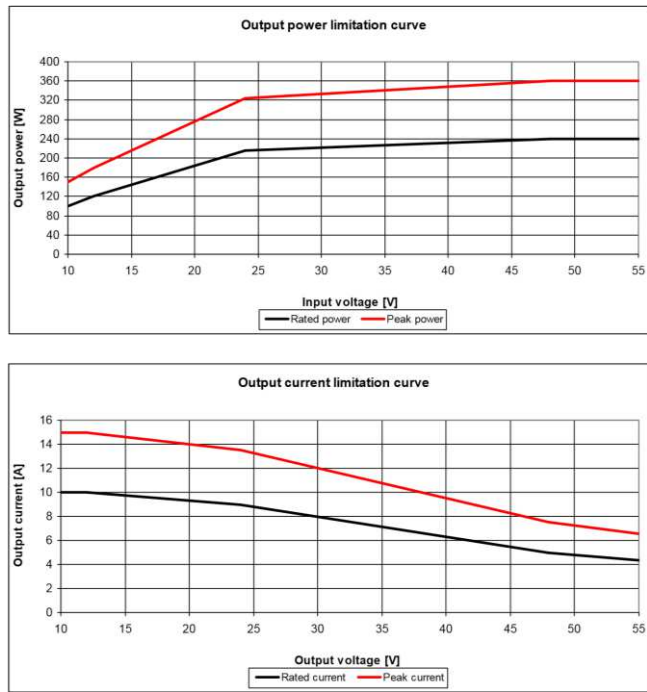


Figure 1. Limitation Curves

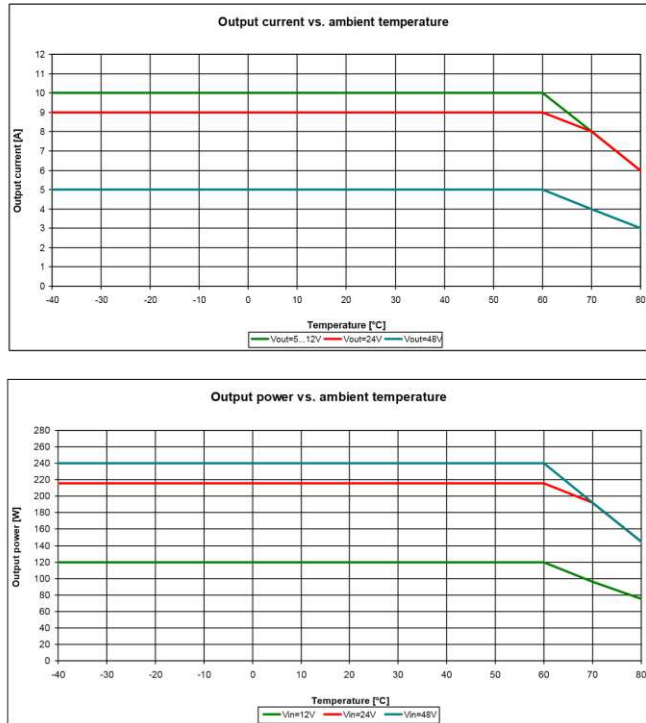


Figure 2. Temperature Derating Curves

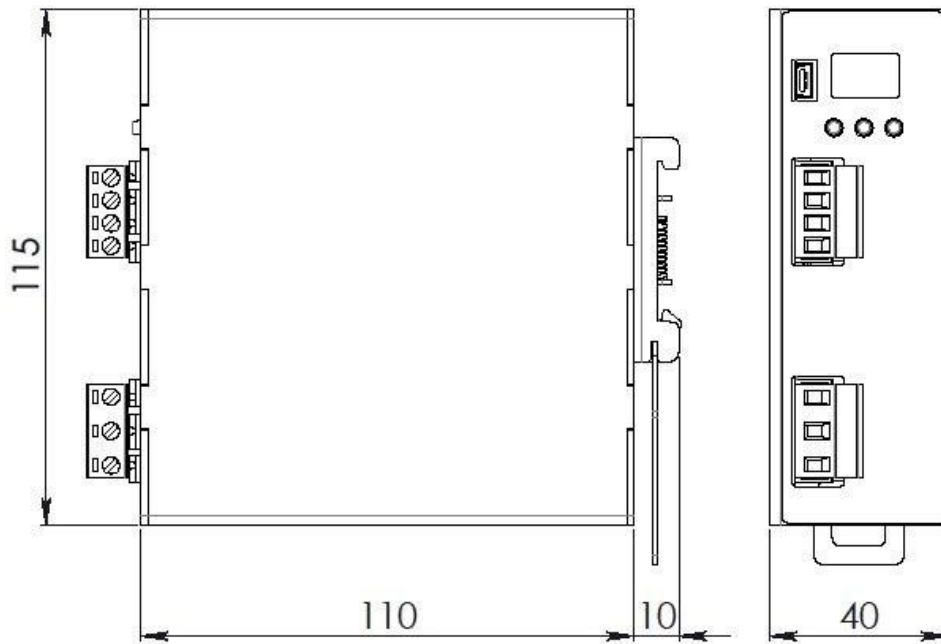


Figure 3. Mechanical Drawing

6. PIN LAYOUT & DESCRIPTION



INPUT CONNECTION	OUTPUT CONNECTION
+ = Positive DC	+ = Positive DC
- = Negative DC	- = Negative DC
⊕ = Earth ground	
SIGNALING:	
DC OK (dry contact)	
NO	
COM	
MINI USB TYPE	
1 = VBUS (+5V)	
2 = Data (D-)	
3 = Data (D+)	
4 = Not connected (ID)	
5 = GND	

For more information on these products consult: [tech.support@psbel.com](mailto:tech.support@psbel.com)

**NUCLEAR AND MEDICAL APPLICATIONS** - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

**TECHNICAL REVISIONS** - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.



Asia-Pacific  
+86 755 298 85888

Europe, Middle East  
+353 61 225 977

North America  
+1 408 785 5200