



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com


Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



LDV series

LED Power Supply

Miniature LED Power Supplies

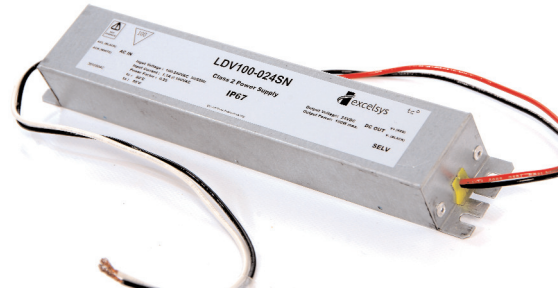LED Power
80W

LDV Series

FEATURES

- **Universal Input: 90-264VAC**
- **Constant Output Voltage**
- **High Efficiency 90%**
- **IP67 rated**
- **Power Factor: Typical 0.95**
- **OCP, OVP, SCP, OTP**
- **-30 to 50°C deg operation**

The LDV100-012SN, the latest addition to the LDV series of Xled constant voltage LED power supplies delivers a single 12V output up 80W(see note 4) in the smallest package size in the industry.

These waterproof IP67, offer industry leading efficiencies of over 90% in the lowest profile (28mm) package. These ultra compact LED power supplies are ideal for space critical applications including commercial refrigeration, retail and office lighting as well as harsh outdoor and urban lighting applications such as street lighting, emergency lighting, signs and displays.

For more information contact sales@excelsys.com or visit www.excelsys.com

Model Number	Output Voltage	Output Current (max)	Efficiency
LDV100-012SN	12V	6.67A	90.0%

Input Specifications					
Parameter	Conditions/Description	Min	Nom	Max	Units
Input Voltage Range	Universal Input	90		264	VAC
Input Frequency Range		47		63	Hz
Input Current	100VAC, 80W (220/240VAC, 90W)			0.40	A
Inrush Current	220/240VAC in, 25°C, Cold Start			40	A
Power Factor	220/240VAC, 100VAC		0.95		
Output Specifications					
Parameter	Conditions/Description	Min	Nom	Max	Units
Line Regulation				±0.5	%
Load Regulation				±1.5	%
Voltage Accuracy	% of Vout			±2.0	%
Ripple and Noise	20MHz Bandwidth. See Note 1			2.0	% pk-pk
Turn-on Delay	Measured at 200VAC and full load			0.5	s
Hold Up Time		15			ms
Over Current Protection		8.0		9.0	A
Overload Protection		96		106	W
Short Circuit Protection	Auto Recovery				
Over Voltage Protection	Auto Recovery			26	V
Over Temp Protection	Auto Recovery	85	92	100	°C
General Specifications					
Parameter	Conditions/Description	Min	Nom	Max	Units
Isolation Voltage	Input to Output See Note 2	3750			VAC
	Input to Chassis	3750			VAC
Efficiency	See individual models		90		%
Safety Agency Approvals	UL8750, EN61347-1, EN61347-2-13				
No load Power Dissipation	Measured at 100VAC and 220/240VAC			1.5	W
MTBF	Telecordia SR-33, Full Load, 25°C		1,000,000		Hours
Lifetime	T case = 60°C		100,000		Hours
Weight			0.66		Kg
Operating Temperature	Maximum T case = 80°C	-30		+50	°C
Storage Temperature		-40		+85	°C
Relative Humidity	Non-condensing (operating)	5		95	%RH
Altitude	Operating, Non Operating 10,000m			2000	m
Vibration	5-500Hz, random vibration			1.0	Grms
Shock	Half-Sine, 11ms duration			10	Grms
Dimensions	L x H x W: 231.0 x 28.4 x 40.0mm				

Note 1. Output connected in parallel with 0.1uF ceramic capacitor and 10uF electrolytic capacitor.

Note 2. Isolation test may not be carried out on unit. Contact Applications Support for details

Note 3. Maximum allowable case temperature is 80°C

Note 4. Output Power rating of 80W at 100VAC. At 220/240VAC output power can be 90W



Europe/Asia

Excelsys Technologies Ltd t: +353 21 4354716
 27 Eastgate Drive f: +353 21 4354864
 Eastgate Business Park e: sales@excelsys.com
 Little Island, Cork, Ireland
 IRELAND

North America

Excelsys Technologies t: (972) 771 4544
 519 Interstate 30, #309 f: (972) 421 1805
 Rockwall, TX 75087 e: salesusa@excelsys.com
 USA

EMC Characteristics				
Parameter	Standard Tested To		Level	Units
Emissions				
Conducted	EN55015, EN55022 Class B		Compliant	
Radiated	EN55015, EN55022 Class B		Compliant	
Harmonic Distortion	EN61000-3-2, Class C		Compliant	
Flicker and Fluctuation	EN61000-3-3		Compliant	
Immunity				
ESD	EN61000-4-2		Level 2	
Radiated RFI	EN61000-4-3		Level 3	
Fast Transients - burst	EN61000-4-4		Level 3	
Input Line Surges	EN61000-4-5		Level 3	
Conducted RFI	EN61000-4-6		Level 3	
Power Freq Magnetic Field	EN61000-4-8		Compliant	
Voltage Dips	EN61000-4-11		Criterion B	


INPUT / OUTPUT WIRING

INPUT CABLE

Black (L) and White(N) 300±20mm
18AWG

OUTPUT CABLE

Red (+V) and Black (-V) 300±20mm
18AWG

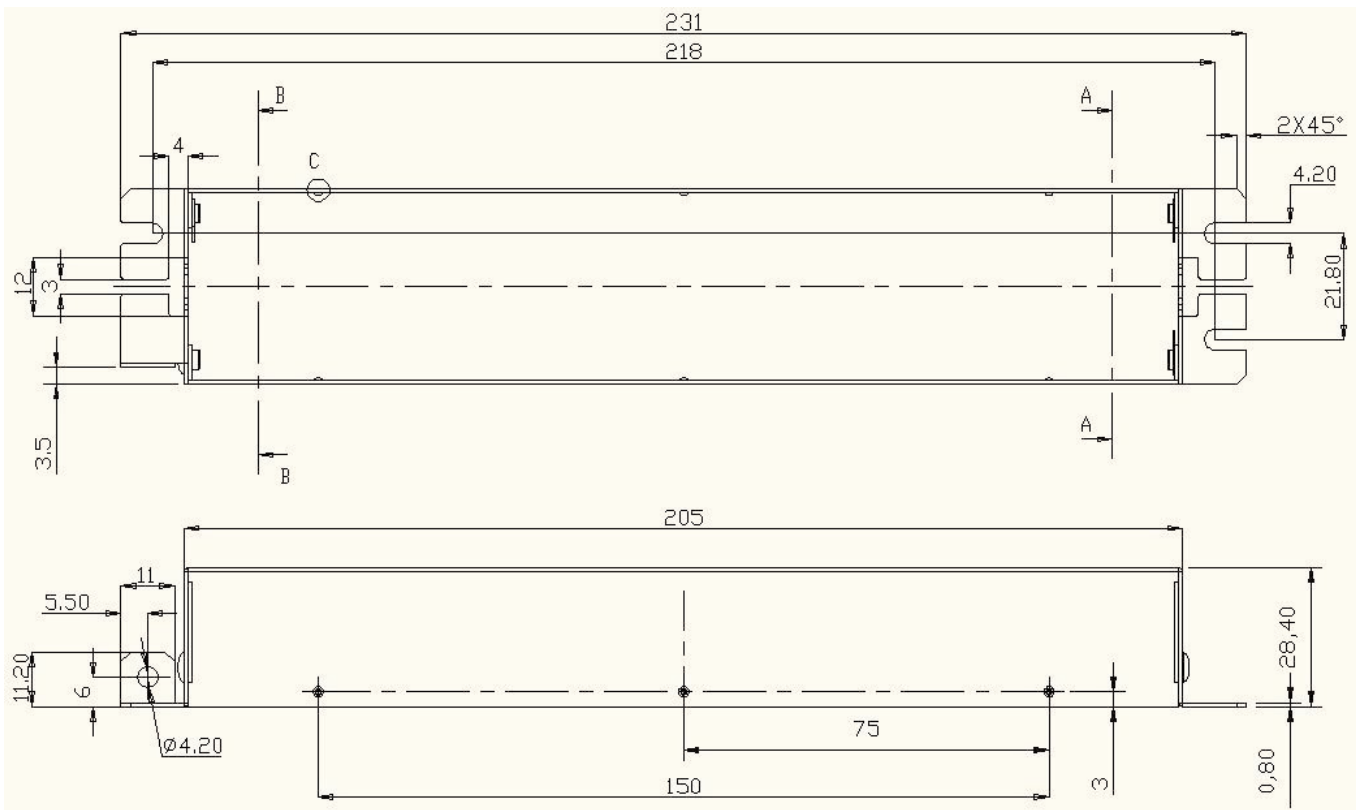

Specifications are subject to change without notice
LDV100-012SN datasheet Pre Release 14 March 2011



Europe/Asia		North America	
Excelsys Technologies Ltd	t: +353 21 4354716	Excelsys Technologies	t: (972) 771 4544
27 Eastgate Drive	f: +353 21 4354864	519 Interstate 30, #309	f: (972) 421 1805
Eastgate Business Park	e: sales@excelsys.com	Rockwall, TX 75087	e: salesusa@excelsys.com
Little Island, Cork, Ireland		USA	
IRELAND			