



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





# LED-100W-PS1-24

Rev 8-28-2017

Switch Mode Constant Voltage LED Driver **select|SYNC**  
classic

## Electrical Specifications

Input Voltage Range:	120-277 Vac Nom. (108-305Vac)
Frequency:	50/60 Hz Nom. (47-63 Hz Min/Max)
Power Factor:	>0.90 @ 80-100% load, 120V-277V
Inrush Current:	20A @ 230V
Max Input Current:	0.985A @120Vac; 0.43A @277Vac
Maximum Power:	100W
Line Regulation:	± 1%
Load Regulation:	± 2%
THD:	≤ 20% @ 80-100% load, 120V-277V
No Load Power Consumption:	< 2W
Ripple & Noise (pk-pk):	< 3%
Withstand voltage:	Input to output, 2,800Vdc, 2mA
Leakage Current:	Maximum 0.5mA at 277Vac, 60Hz input

## Protections

Over-voltage	Output
Over-current	Output
Short Circuit	Auto Recovery, Hiccup mode on all

## Environmental Specifications

Maximum Case Temp.	90°C
Minimum Starting Temp:	-40°C
Storage Temperature:	-40°C to +85°C
Humidity:	5% to 95%
Cooling:	Convection
Vibration Frequency:	5 to 55 Hz/2g, 30 minutes
Sound Rating:	Class A
Lifetime:	50,000 hrs @ Tc=74°C (see graph for details)
Weight:	1.1 lbs (0.5 kg)



- Total Power: 100 Watts
- Constant Voltage with Isolation
- Input Voltage: 120-277 Vac Nom.
- UL Dry & Damp Location Rated
- UL Type HL Rated for Hazardous Locations
- UL Sign Components Manual (S.A.M.)
- White Steel Case
- 5 year warranty
- UPDATED TO UL CLASS P

**Note:**  
LED drivers are designed and intended to operate LED loads only. Non-LED loading may be outside the specified design limits of our LED drivers, and therefore cannot be covered by any warranty. If you desire to use our LED drivers to operate non-LED loads please contact us to discuss compatibility.

© 2017 Thomas Research Products. Specifications subject to change without notice.

## Constant Voltage Models

Model	Output Voltage (Vdc ±5%)	Output Current Range (mA)	Max. Output Power (W)	Typical Efficiency
LED100WPS1-24 •	24	0-4150	100	88%


• Indicates S.A.M.

**Class 2: US/Canada**




Safety Cert.	Standard
UL/CUL	UL8750, UL879, CAN/CSA-22.2 No. 250.13-12
CE	EN61347-1, EN61347-2-13
EMC Standard	Notes
FCC, 47CFR Part 15	ANSI C63.4:2009 Class B (Consumer Limit)
EN61000-3-2	Harmonic Current Emissions Class C



**Dimensions**

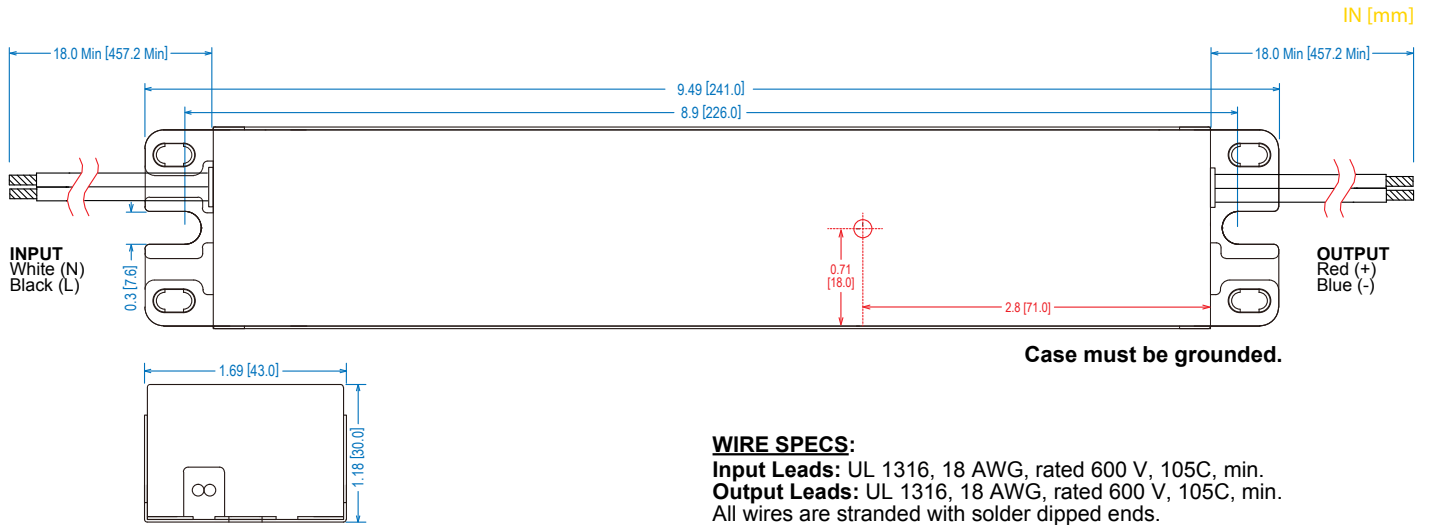

**Power Characteristics**

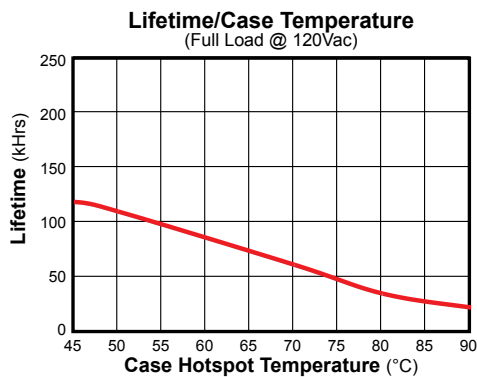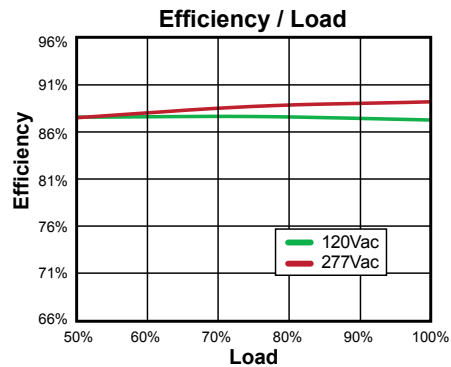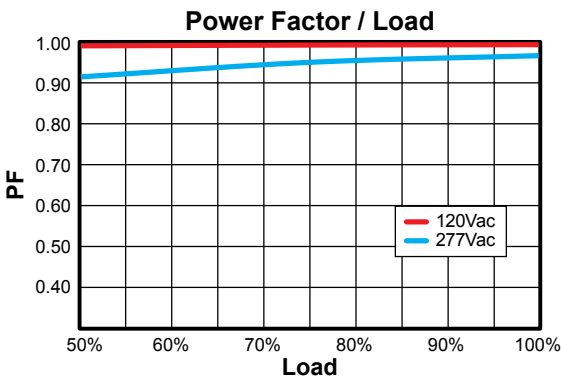

- PRODUCT NOTES:**
- Rev A: UL Recognized for US and Canada
  - Rev B: UL Listed for US and Canada, 5/2017

**UL Conditions of Acceptability**

See website for additional information

**Note:** The area under the life-temperature curve represents where the driver has highly reliable operation within specification. Driver performance may drift out of published specifications as the hours of operation exceed the curve at a given temperature. Higher operating temperatures increase the chances of a failure to function. Other electrical, mechanical and environmental factors affect driver lifetime but are not represented in this calculation.