



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




Features

- Low Forward Voltage Drop
- Guard Ring Construction for Transient Protection
- Fast Reverse Recovery Time
- Low Reverse Capacitance
- **Lead Free Finish, RoHS Compliant (Note 3)**

Mechanical Data

- Case: MiniMELF
- Case Material: Glass. UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 1 per J-STD-020C
- Terminals: Finish - Sn97.5Ag2.5. Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Ordering Information: See Last Page
- Marking: Cathode Band Only
- Weight: 0.05 grams (approximate)

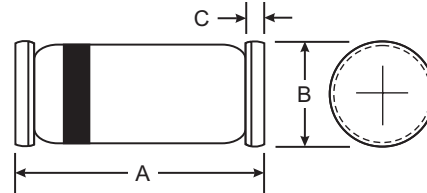

| MiniMELF | | |
|----------------------|------|------|
| Dim | Min | Max |
| A | 3.30 | 3.70 |
| B | 1.30 | 1.60 |
| C | 0.28 | 0.50 |
| All Dimensions in mm | | |

Maximum Ratings @ T_A = 25°C unless otherwise specified

| Characteristic | Symbol | LLSD101A | LLSD101B | LLSD101C | Unit |
|--|---------------------|-------------|----------|----------|---------|
| Peak Repetitive Reverse Voltage | V _{RRM} | 60 | 50 | 40 | V |
| Working Peak Reverse Voltage | V _{RWM} | | | | |
| DC Blocking Voltage | V _R | | | | |
| RMS Reverse Voltage | V _{R(RMS)} | 42 | 35 | 28 | V |
| Forward Continuous Current (Note 1) | I _{FM} | 15 | | | mA |
| Non-Repetitive Peak Forward Surge Current @ t ≤ 1.0s @ t = 10μs | I _{FSM} | 50 2.0 | | | mA A |
| Power Dissipation (Note 1) | P _d | 400 | | | mW |
| Thermal Resistance, Junction to Ambient Air (Note 1) | R _{θJA} | 375 | | | °C/W |
| Operating Temperature Range | T _j | -55 to +125 | | | °C |
| Storage Temperature Range | T _{STG} | -55 to +150 | | | °C |

Electrical Characteristics @ T_A = 25°C unless otherwise specified

| Characteristic | Symbol | Min | Max | Unit | Test Condition |
|-------------------------------|-----------------|-----|--|------|---|
| Forward Voltage Drop (Note 2) | V _F | — | 0.41 0.40 0.39 1.00 0.95 0.90 | V | I _F = 1.0mA I _F = 1.0mA I _F = 1.0mA I _F = 15mA I _F = 15mA I _F = 15mA |
| Reverse Current (Note 2) | I _R | — | 200 | nA | V _R = 50V V _R = 40V V _R = 30V |
| Total Capacitance | C _T | — | 2.0 2.1 2.2 | pF | V _R = 0V, f = 1.0MHz |
| Reverse Recovery Time | t _{rr} | — | 1.0 | ns | I _F = I _R = 5.0mA, I _{rr} = 0.1 x I _R , R _L = 100Ω |

- Note: 1. Part mounted on FR-4 board with recommended pad layout, which can be found on our website at <http://www.diodes.com/datasheets/ap02001.pdf>.
2. Short duration test pulse used to minimize self-heating effect.
3. EC Directive 2002/95/EC (RoHS) revision 13.2.2003. Glass and High Temperature Solder Exemptions Applied where applicable, see EU Directive Annex Notes 5 and 7.

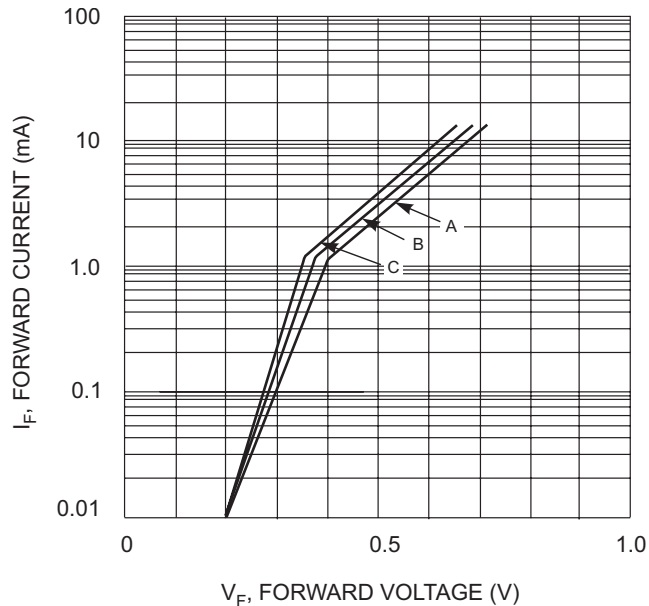


Fig. 1 Typical Forward Characteristic Variations for Primary Conduction

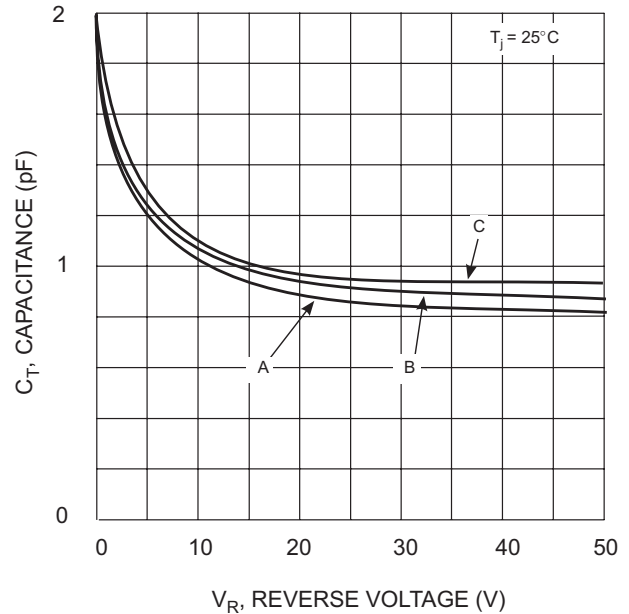


Fig. 2 Total Capacitance vs Reverse Voltage

Ordering Information (Note 4)

| Device | Packaging | Shipping |
|-------------|-----------|--------------------------|
| LLSD101A-7 | MiniMELF | 2.5K/Tape & Reel, 7-inch |
| LLSD101A-13 | MiniMELF | 10K/Tape & Reel, 13-inch |
| LLSD101B-7 | MiniMELF | 2.5K/Tape & Reel, 7-inch |
| LLSD101B-13 | MiniMELF | 10K/Tape & Reel, 13-inch |
| LLSD101C-7 | MiniMELF | 2.5K/Tape & Reel, 7-inch |
| LLSD101C-13 | MiniMELF | 10K/Tape & Reel, 13-inch |

Notes: 4. For packaging details, visit our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

IMPORTANT NOTICE

Diodes, Inc. and its subsidiaries reserve the right to make changes without further notice to any product herein to make corrections, modifications, enhancements, improvements, or other changes. Diodes, Inc. does not assume any liability arising out of the application or use of any product described herein; neither does it convey any license under its patent rights, nor the rights of others. The user of products in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on our website, harmless against all damages.

LIFE SUPPORT

The products located on our website at www.diodes.com are not recommended for use in life support systems where a failure or malfunction of the component may directly threaten life or cause injury without the expressed written approval of Diodes Incorporated.