



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



SPECIFICATION FOR COTCO LED LAMP

Document No: SPE/LP379PBL1-C0G-03
Model No : LP379PBL1-C0G-03
Rev. No: 02
Date: 2005-07-07


Description:

120 Degree 7.6 x 7.6mm LED Lamp in Blue Color
with Water Transparent Lens and Stopper

Dice Material: InGaN

Confirmed
by Customer: _____

Date: _____

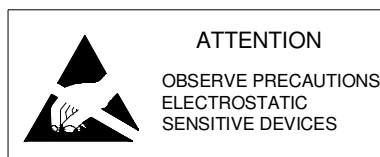

Document No.	SPE/LP379PBL1-C0G-03
Rev. No.	02

Applications:

- Advertising Signs
- Indicators
- Message Board

Absolute Maximum Ratings at Ta = 25°C


Items	Symbol	Absolute maximum Rating	Unit
Forward Current	I_F	30	mA
Peak Forward Current*	I_{FP}	100	mA
Reverse Voltage	V_R	5	V
Power Dissipation	P_D	132	mW
Operation Temperature	T_{opr}	-40 ~ +100	°C
Storage Temperature	T_{stg}	-40 ~ +100	°C
Lead Soldering Temperature	T_{sol}	Max.260°C for 3 sec Max. (3mm from the base of the epoxy bulb)	

*pulse width ≤ 0.1 msec duty $\leq 1/10$

Typical Electrical & Optical Characteristics (Ta = 25°C)

Items	Symbol	Condition	Min.	Typ.	Max.	Unit
Forward Voltage	V_F	$I_F = 30$ mA	---	3.6	4.4	V
Reverse Current	I_R	$V_R = 5$ V	---	---	100	μ A
Dominant Wavelength	λ_D	$I_F = 30$ mA	462	470	475	nm
Luminous Flux	Φ_V	$I_F = 30$ mA	400	800	---	mIm
50% Power Angle	$2\theta_{\frac{1}{2}}$	$I_F = 30$ mA	---	120	---	deg

Dimension Drawing

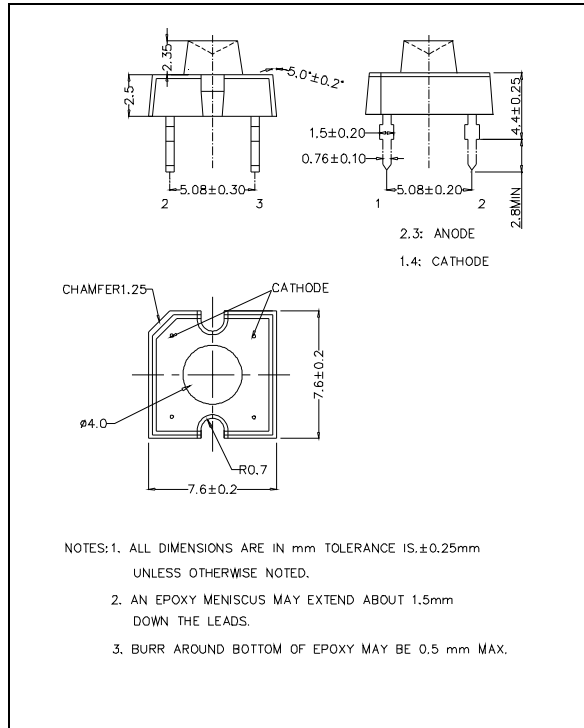

Document No.	SPE/LP379PBL1-C0G-03
Rev. No.	02


Standard bins for LP379PBL1-C0G-03 ($I_F = 30\text{mA}$):

Lamps are sorted to Luminous Flux $-\Phi_V$, V_F & Dominant Wavelength $-\lambda_D$ bins shown.

Orders for LP379PBL1-C0G-03 may be filled with any or all bins contained as below.

All Luminous Flux $-\Phi_V$, V_F & Dominant Wavelength $-\lambda_D$ values shown and specified are at $I_F=30\text{mA}$.

* **C+**

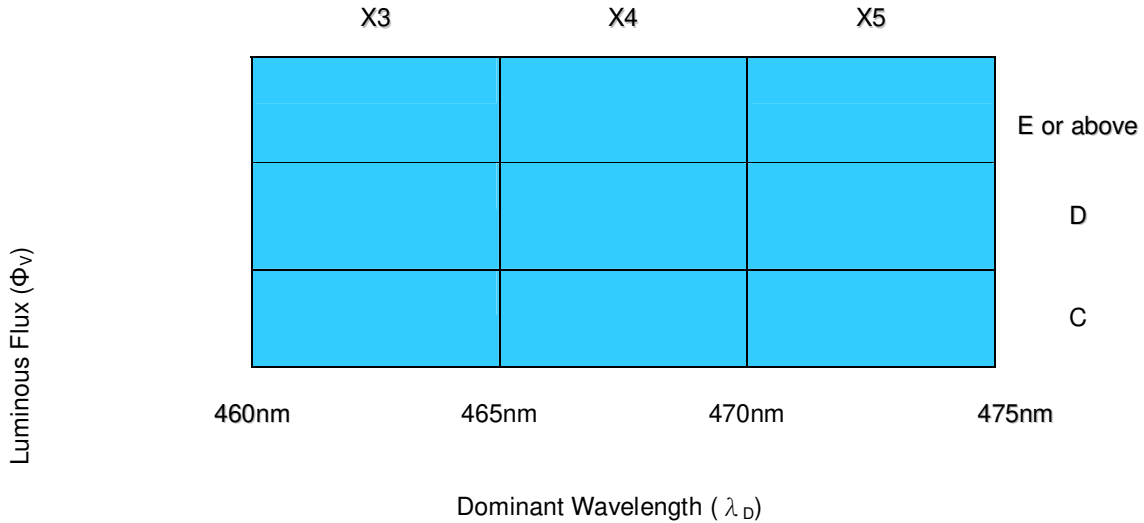

Rank	C	D
Luminous Flux	400-800 mlm	600-1200 mlm

* C+ indicates Luminous Flux is at C bin or above.

Forward Voltage (V_F)

Rank	V7	V8	V9	V10	V11	V12	V13	V14
Voltage	2.8-3.0V	3.0-3.2V	3.2-3.4V	3.4-3.6V	3.6-3.8V	3.8-4.0V	4.0-4.2V	4.2-4.4V

Important Notes:

- 1) All ranks will be included per delivery; rank ratio will be based on the Dices distribution.
- 2) No tolerance in the measurement of luminous flux.
- 3) Tolerance of measurement of dominant wavelength is $\pm 1\text{nm}$.
- 4) Tolerance of measurement of V_f is $\pm 0.05\text{ V}$.
- 5) Packaging methods are available for selection, Please refer to PACKAGING STANDARD.
- 6) Please refer to LED LAMP RELIABILITY TEST STANDARD for reliability test conditions.
- 7) Please refer to APPLICATION NOTES for Application.

Document No.	SPE/LP379PBL1-C0G-03
Rev. No.	02

Graphs

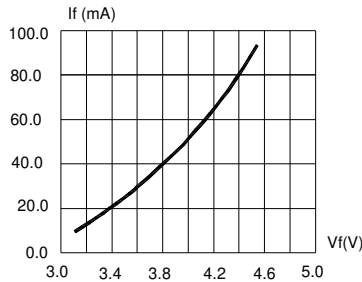


FIG.1 FORWARD CURRENT VS. FORWARD VOLTAGE.

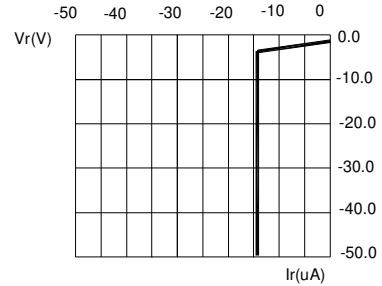


FIG.2 REVERSE CURRENT VS. REVERSE VOLTAGE.




FIG.3 RELATIVE LUMINOUS FLUX VS. FORWARD CURRENT

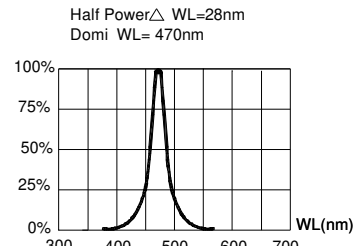


FIG.4 RELATIVE LUMINOUS FLUX VS. WAVELENGTH.

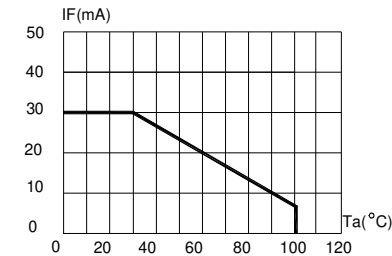


FIG.5 MAXIMUM FORWARD DC CURRENT VS AMBIENT TEMPERATURE ($T_{jmax}=120^{\circ}C$)

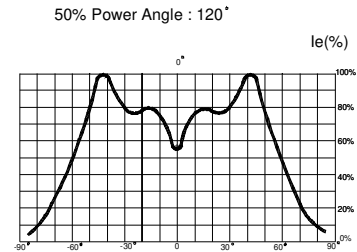


FIG.6 FAR FIELD PATTERN

Items	Signatures	Date
Prepared by	LiuZM	2005-07-07
Checked by	Aldosin	2005-07-07
Approved by	David	2005-07-07
FCN#	FCN20050221	

Revision History		
Rev. No	Date	Change Description
02	2005-07-07	Release.

Data is subject to change without prior notice; please refer to COTCO Website for the latest version.

Copyright@2002 Cotco International Ltd.