



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



LQP03PN4N7J02#


"#" indicates a package specification code.



< List of part numbers with package codes >

LQP03PN4N7J02D , LQP03PN4N7J02J , LQP03PN4N7J02B

Shape

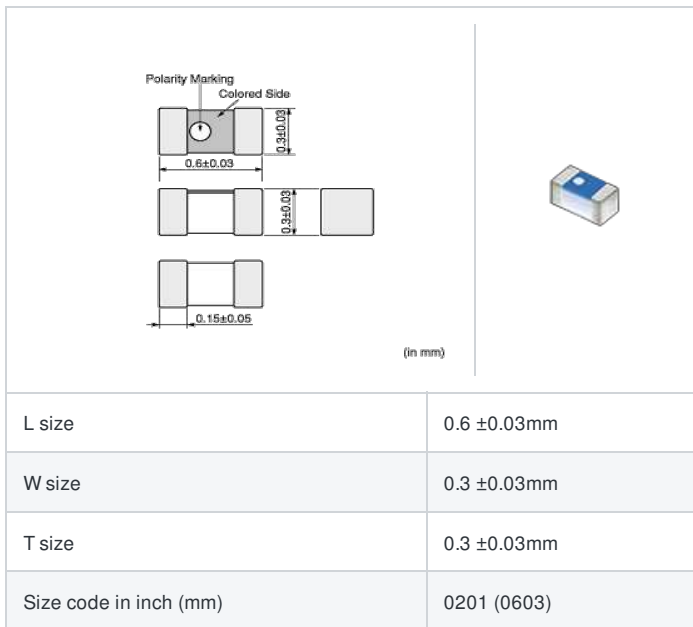

Notes

In operating temperature exceeding +85°C, derating of current is necessary for LQP03PN_02 series.
Please apply the derating curve shown in chart according to the operating temperature.
Please confirm "Notice (Rating)".

References

| Packaging code | Specifications | Minimum quantity |
|----------------|---------------------|------------------|
| D | φ180mm Paper taping | 15000 |
| J | φ330mm Paper taping | 50000 |
| B | Packing in bulk | 500 |

| Mass (Typ.) | |
|-------------|---------|
| 1 piece | 0.0002g |


Specifications

| | |
|---|---|
| Inductance | 4.7nH ±5% |
| Inductance test frequency | 500MHz |
| Rated current (Itemp) (Based on Temperature rise) | 900mA(Ambient temp.85°C) 600mA(Ambient temp.125°C) |
| Max. of DC resistance | 0.140Ω |
| Q (min.) | 10 |
| Q test frequency | 500MHz |
| Self resonance frequency (min.) | 4400MHz |
| Operating temperature range (Self-temperature rise is not included) | -55~125°C |
| Series | LQP03PN_02 |


Attention

- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.


■ Inductance-Frequency characteristics (Typ.)

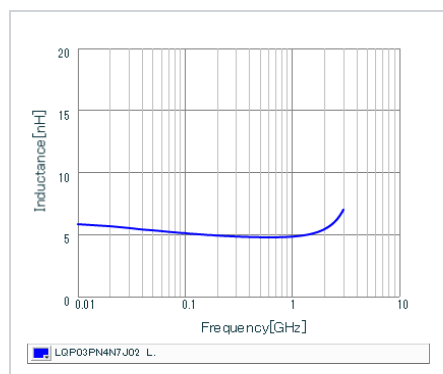

■ Q-Frequency characteristics (Typ.)

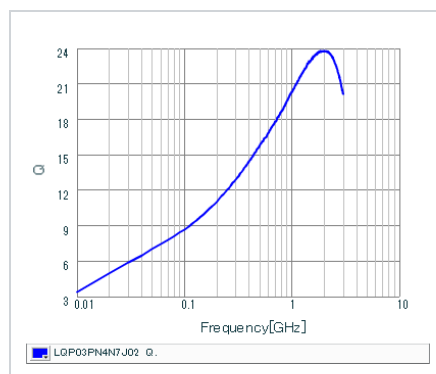

■ Notice (Rating)

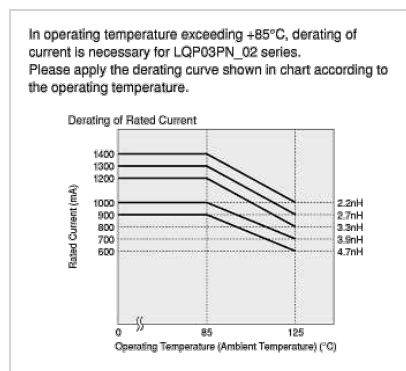

⚠ Attention

- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
 - 2.This datasheet has only typical specifications because there is no space for detailed specifications.
- Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.