



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





HIGH-SPEED LTE NETWORKING PLATFORM



# DIGI TRANSPORT® LR54

High-speed LTE Advanced and Wi-Fi router in a durable hardware package for demanding M2M applications

Digi TransPort LR54 is a high-speed LTE Advanced networking platform designed for retail, commercial and managed networking applications across distributed enterprises. Each device features an LTE Advanced CAT6 modem with speeds up to 300 Mbps and support for global deployments with a single hardware version, as well as a 4-port Gigabit Ethernet switch and serial port for console access. The routers include license-free enterprise software features like VPN, firewall and SNMP.

The two FIPS models make use of an embedded FIPS 140-2 validated cryptographic module for all encryption and authentication functions. The LR54 FIPS model is often used as a VPN gateway to bridge local private subnets through

public or untrusted networks, ensuring message privacy and integrity.

The Wi-Fi variant features dual-band, dual-concurrent 5 GHz and 2.4 GHz radios, personal/enterprise security, and multiple SSIDs for maximum range and throughput performance in M2M applications.


Digi TransPort LR54 is ideal for connecting:

- Retail branch sites
- Self-service kiosks
- Remote offices/equipment
- Digital media installations
- Security monitoring equipment
- Guest and employee Wi-Fi users

## FEATURES AND BENEFITS

- High-speed LTE Advanced for digital content and business networking applications
- Powerful dual Wi-Fi radios provide 802.11 b/g/n/ac connection to local users and end devices
- Automated fail-over/fail-back between Ethernet, Cellular (dual SIMs), and IPsec tunnels
- Enables compliance with NIST SP 800-171 requirement for FIPS-validated cryptography
- On-board Python environment for custom application programming
- Digi Remote Manager® provides mass configuration, device management and troubleshooting tools

## APPLICATION EXAMPLE

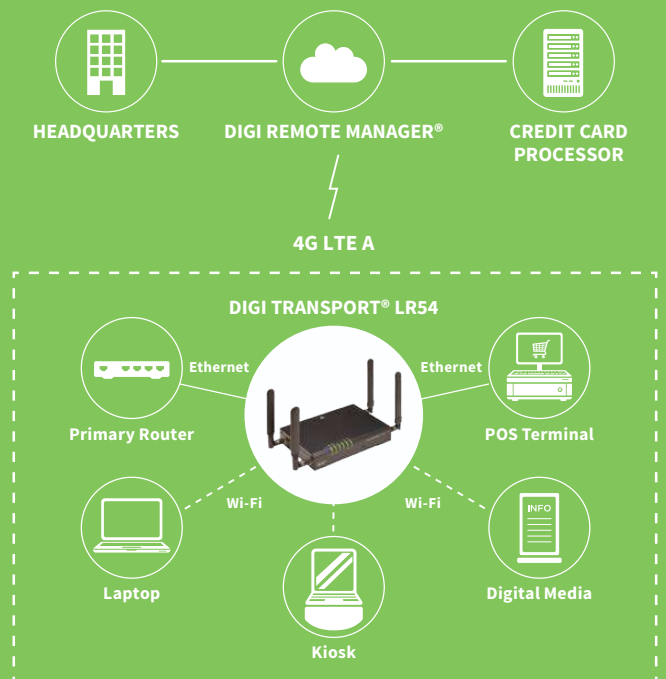

## RELATED PRODUCTS



## SPECIFICATIONS

## Digi TransPort® LR54

## WIRELESS INTERFACES

## CELLULAR\*

<b>LTE/HSPA+</b>	Coverage: North America/EMEA LTE Advanced CAT 6: 700(B12,B13,B29)/800(B20,B26)/850(B5)/900(B8)/AWS(B4)/1800(B3)/1900(B2,B25)/2100(B1)/2300(B30)/2500(B41)/2600(B7) 3G HSPA+: 850/900/AWS/1800/1900/2100 MHz Transfer rate (max): 300 Mbps down, 150 Mbps up Approvals: PTCRB, AT&T, Verizon
<b>CONNECTOR</b>	(2) 50 Ω SMA (Center pin: female)
<b>SIM SLOTS</b>	(2) Mini-SIM (2FF)
<b>SIM SECURITY</b>	SIM slot cover plate

## WI-FI

<b>802.11</b>	Wi-Fi maximum data rates: 54 Mbps (802.11a); 11 Mbps (802.11b); 54 Mbps (802.11g); 300 Mbps (802.11n); 866 Mbps (802.11ac)
<b>TX POWER</b>	2.4 GHz 19 dBm (802.11g/n), 19 dBm (802.11b) 5 GHz 22.9 dBm for all modes
<b>RX SENSITIVITY</b>	-87 dBm / 11 Mbps (802.11b) -71 dBm / 54 Mbps and -90 dBm / 6 Mbps (802.11a) -74 dBm / 54 Mbps and -92 dBm / 6 Mbps (802.11g) -66 dBm / 300 Mbps and -92 dBm / 6 Mbps (802.11n 2.4 GHz) -67 dBm / 300 Mbps and -89 dBm / 6 Mbps (802.11n 5 GHz) -57 dBm / 866 Mbps and -83 dBm / 29 Mbps (802.11ac)
<b>MODES</b>	Access point, support for multiple SSID
<b>SECURITY</b>	Mixed WPA/WPA2 Personal; WPA2 Personal; Mixed WPA/WPA2 Enterprise; WPA2 Enterprise
<b>CONNECTORS</b>	(2) 50 Ω RP-SMA (Center pin: male)

## WIRED INTERFACES

## SERIAL

<b>PORTS</b>	(1) DB-9; DCE
<b>STANDARD</b>	RS-232
<b>SIGNAL SUPPORT</b>	TXD, RXD, RTS, CTS, DTR, DCD, DSR, RI
<b>FLOW CONTROL</b>	Software (XON/XOFF), hardware supported

## ETHERNET

<b>PORTS</b>	(4) RJ-45; 10/100/1000 Mbit/s (auto-sensing)
--------------	--

## MANAGEMENT

<b>REMOTE MANAGEMENT</b>	Digi Remote Manager® (cloud based); SNMP v1/v2c/v3 (user installed/managed)
<b>LOCAL MANAGEMENT</b>	Web interface (HTTPS); CLI (SSH, Serial port)
<b>MEMORY</b>	256 MB of Flash; 100 MB user available memory

## POWER

<b>INPUT</b>	12 VDC
<b>CONNECTOR</b>	4-pin terminal block; Power supply comes with US plug (IEC Type A) and an EU plug (IEC Type C)
<b>CONSUMPTION</b>	13.68W max, 11.4W average
<b>DC POWER SUPPLY</b>	100-240 VAC 50/60 Hz

## PHYSICAL

<b>DIMENSIONS (L X W X H)</b>	8.15 in x 5.5 in x 1.5 in (207 mm x 140 mm x 38 mm)
<b>WEIGHT</b>	2.90 lb (1.32 kg)
<b>STATUS LEDS</b>	Power, WWAN signal, WWAN service, SIM 1, SIM 2, 2.4 GHz and 5 GHz LEDs on Wi-Fi version
<b>MATERIAL/RATING**</b>	Industrial (Metal) / IP30
<b>MOUNTING</b>	Wall mount bracket sold separately

\* Transfer rates are network operator dependent

\*\*The enclosure rating is self-declared and has not been formally verified by an independent lab

## SPECIFICATIONS

## Digi TransPort® LR54

### ENVIRONMENTAL

OPERATING TEMPERATURE **	-20° C to +70° C
STORAGE TEMPERATURE	-40° C to +85° C
RELATIVE HUMIDITY	0% to 95% (non-condensing) @ 25° C

### APPROVALS

CELLULAR	PTCRB
WI-FI	Wi-Fi Alliance® Wi-Fi CERTIFIED™
MATERIALS	RoHS
SAFETY	CB Scheme, IEC 60950-1
EMISSIONS/IMMUNITY	CE, FCC Part 15 Class B

### WARRANTY

PRODUCT WARRANTY	3 years
------------------	---------


## ENTERPRISE SOFTWARE

## DESCRIPTION

MANAGEMENT PROTOCOLS	HTTPS, TLS1.0/1.1/1.2, SFTP, SCP,SNMP (v1/v2c/v3), SSHv2,CLI for web management; remote management via Digi Remote Manager; protocol analyzer, ability to capture PCAP for use with Wireshark, Syslog support for streaming event and system logs
SECURITY/VPN	Stateful inspection firewall with scripting; VPN: IPsec with IKEv1; OpenVPN (32) VPN Tunnels; Cryptology: SHA-1/SHA256, RSA, DH Groups 5,14,15,16,17,18 ; Encryption: AES up to 256-bit; Ethernet Port Isolation; RADIUS
ROUTING/FAILOVER	NAT, NAPT with IP Port Forwarding; IP Failover: Automatic failover/failback to second GSM network/Standby APN, IP Port forwarding
OTHER PROTOCOLS	IPv4, IPv6, DHCP, GRE, DMNR, DSCP (QoS)

## PRODUCT IMAGES

### DIGI TRANSPORT LR54

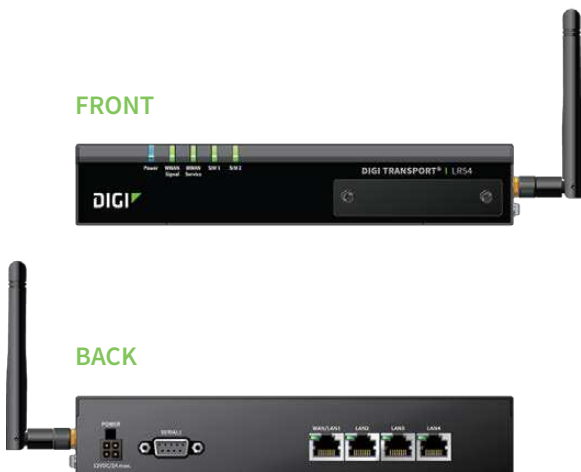

### DIGI TRANSPORT LR54 (WITH WI-FI)



\*\*The enclosure rating is self-declared and has not been formally verified by an independent lab



# DIGI REMOTE MANAGER®



## CAPABILITIES

- Centralized management of remote devices over 3G/4G LTE
- Define standard configurations and automatically monitor individual devices for PCI security compliance
- Report and alert on performance statistics, including connection history, signal quality, latency, data usage and packet loss
- No servers or applications to operate and maintain
- Complete tasks for your entire device network in minutes
- Edit configurations and update firmware for your individual devices or groups
- Monitor the status and location of your remote device via a web browser
- Active or deactivate cellular lines and monitor data to ensure you never incur overage charges

## INFRASTRUCTURE

- Hosted in a commercial-grade SAS 70-certified environment
- Superior availability, operating to 99.9% or greater
- Open APIs available to support application development

## SECURITY

- Certified SSAE-16 facilities
- Member of the Cloud Security Alliance
- Over 175 Security Controls in place to protect your data
- Enables compliance with security frameworks like PCI, HIPAA, NIST and more
- Earned SkyHigh's Cloud Trust Program highest ranking of Enterprise-Ready

PART NUMBERS	DIGI TRANSPORT WR31
LR54-AA401	4G LTE North America/EMEA, No Wi-Fi
LR54-AW401	4G LTE North America/EMEA, Wi-Fi
LR54-AA403	4G LTE North America/EMEA, No Wi-Fi, FIPS 140-2
LR54-AW403	4G LTE North America/EMEA, Wi-Fi, FIPS 140-2

PART NUMBERS	ACCESSORIES
78000001	Wall Bracket

FOR MORE INFORMATION  
PLEASE VISIT [WWW.DIGI.COM](http://WWW.DIGI.COM)

DIGI SERVICE AND SUPPORT / You can purchase with confidence knowing that Digi is always available to serve you with expert technical support and our industry leading warranty. For detailed information visit [www.digi.com/support](http://www.digi.com/support).

© 1996-2018 Digi International Inc. All rights reserved.  
All trademarks are the property of their respective owners.

95003316  
A13/318

DIGI INTERNATIONAL WORLDWIDE HQ  
877-912-3444 / 952-912-3444 / [www.digi.com](http://www.digi.com)

DIGI INTERNATIONAL GERMANY  
+49-89-540-428-0

DIGI INTERNATIONAL JAPAN  
+81-3-5428-0261 / [www.digi-intl.co.jp](http://www.digi-intl.co.jp)

DIGI INTERNATIONAL SINGAPORE  
+65-6213-5380

DIGI INTERNATIONAL CHINA  
+86-21-50492199 / [www.digi.com.cn](http://www.digi.com.cn)

