



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# Certified Safety Capacitors X<sup>2</sup>, Y<sup>3</sup> & X<sup>1</sup>, Y<sup>2</sup>

X<sup>2</sup>, Y<sup>3</sup> (LS style) and X<sup>1</sup>, Y<sup>2</sup> (ES style) Class Compliant\* chip capacitors specifically designed for use in modem, facsimile, telephone and other electronic equipment where lightning or overvoltage surges can occur. Both styles are rated at 250 Vac safety approved with COG (NPO) and X7R dielectrics available (dependant on style).

X<sup>2</sup>, Y<sup>3</sup> (LS style) is certified to EN 60950 and compliant to Standards EN 132400: 1994/A2: 1998/IEC60384-14, Second Edition: 1993/A1:1995.


X<sup>1</sup>, Y<sup>2</sup> (ES style) is certified to IEC60384-14, Second Edition: 1993/A1:1995 and compliant to Standards EN 132400: 1994/A2:1998.

Both styles meet the requirements of EN61000-4-5, IEC1000-4-5 and IEC801-4-5.

## Certification numbers

Safety Classification	X <sup>2</sup> , Y <sup>3</sup>	X <sup>1</sup> , Y <sup>2</sup>
TUV	LS1808N, LS1812N - *T72140287.01 LS1808B - *T72140286.01	ES 1808 - R60012089 ES 2211, ES 2215 - R2072738.01 ES 2225 - R2072738.02
Standards	EN 132400, EN 60950, IEC 60384-14 2nd Edition, Class X <sup>2</sup> Y <sup>3</sup> .	EN 132400, IEC 60384-14 2nd Edition, Class X <sup>1</sup> Y <sup>2</sup>
UL	NWQG2.E208336 and NWQG8.E208336	

\*LS style is compliant with Robustness of Termination (cl 4.3) test according to IEC 60384-1 amendment 3 cl 4.34 and 4.35 Resistance to Soldering Heat (cl 4.4) tested according to IEC 60384-1 amendment 3 cl. 4.14.2, Impulse Test made with 2.5 KV or 5.0KV as required according to 6.4.2.1 in EN 60950. The creepage distance between live parts of different polarity meets the requirements of IEC 60950.

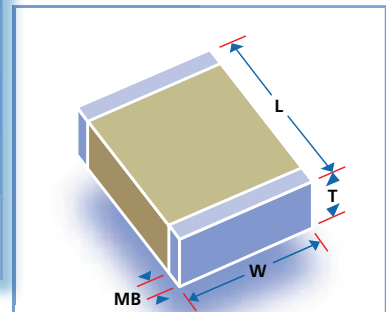

## Dimensions - inches/mm


Safety Classification	Size	X <sup>2</sup> , Y <sup>3</sup>		X <sup>1</sup> , Y <sup>2</sup>			
		LS 1808	LS 1812	ES 1808	ES 2211	ES 2215	ES 2225
L	inches ±0.015/0.38:	0.180	0.180	0.180*	0.220	0.220	0.220
	mm ±0.015/0.38:	4.57	4.57	4.57	5.58	5.58	5.58
W	inches ±0.02:	0.080	0.125	0.080**	0.110	0.150	0.250
	mm ±0.508:	2.03	3.18	2.03	2.79	3.81	6.35
MB typical	inches:	0.024	0.024	0.020	0.300	0.300	0.300
	mm:	0.609	0.609	5.08	0.762	0.762	0.762
Creepage min	inches:	0.102	0.102	0.100	0.157	0.157	0.157
	mm:	2.60	2.60	2.50	3.99	3.99	3.99

\*Tolerance is ±0.014/0.35 \*\*Tolerance is ±0.012/0.30

## How to Order - Certified Safety Capacitors

LS	1808	N	122	K	302	N	X080	T	M
<b>STYLE</b> LS = X <sup>2</sup> , Y <sup>3</sup> ES = X <sup>1</sup> , Y <sup>2</sup>	<b>SIZE</b> See Chart	<b>DIELECTRIC</b> N = COG B = X7R	<b>CAPACITANCE</b> Value in Picofarads. Two significant figures, followed by number of zeros: 121 = 120pF	<b>TOLERANCE</b> J = ± 5% K = ± 10% M = ± 20%	<b>VOLTAGE-SURGE</b> Two significant figures, followed by number of zeros: 302 = 3000V (X <sup>2</sup> , Y <sup>3</sup> ) 502 = 5000V (X <sup>1</sup> , Y <sup>2</sup> )	<b>TERMINATION</b> N = Nickel Barrier	<b>THICKNESS OPTION</b> Blank = Standard thickness X = special thickness, specified in inches: X080 = 0.08" X100 = 0.10" X010 = 0.11" X150 = 0.15"	<b>PACKING</b> No suffix = Bulk T = Tape & Reel	<b>MARKING</b> Parts marked: NLS (X <sup>2</sup> , Y <sup>3</sup> ) NY2 (X <sup>1</sup> , Y <sup>2</sup> )

# Certified Safety Capacitors X<sup>2</sup>, Y<sup>3</sup> & X<sup>1</sup>, Y<sup>2</sup>

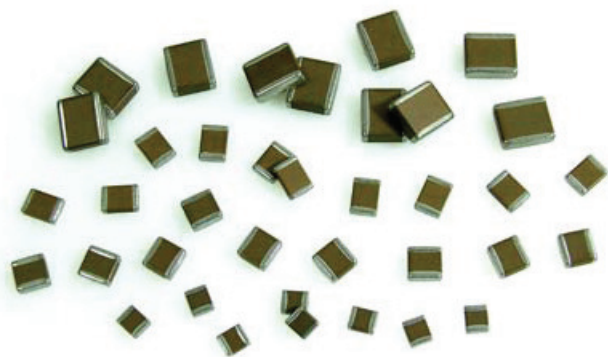

- For dielectric characteristics see page 4 & 7.
- Nickel Barrier terminations.
- Capacitance tolerances available ±5%, ±10%, ±20%

**Note:** Capacitance values are shown below as 3 digit code:  
2 significant figures followed by the no. of zeros  
e.g. 183 = 18,000pF.

## Capacitance values

Safety Classification		X <sup>2</sup> , Y <sup>3</sup>					X <sup>1</sup> , Y <sup>2</sup>					
Size		LS 1808		LS 1812			ES 1808		ES 2211	ES 2215	ES 2225	
Tmax	inches: mm:	0.065 1.65	0.080* 2.03	0.065 1.65	0.065 1.65	0.100* 2.54	0.080* 2.03		0.150* 4.00	0.150* 4.00	0.150* 4.00	
Dielectric		COG/NPO		X7R	COG/NPO			COG/NPO	X7R	COG/NPO	COG/NPO	COG/NPO
4R7							•					
5R0		•					•					
6R8		•					•					
8R2		•					•					
100		•					•					
120		•					•					
150		•					•					
180		•					•					
220		•					•					
270		•					•					
330		•					•					
390		•					•					
470		•					•					
560		•					•					
680		•					•					
820		•					•					
101		•					•					
121		•					•					
151		•		•			•	•	•			
181		•		•			•	•	•			
221		•		•			•	•	•			
271		•		•			•	•	•			
331		•		•			•	•	•			
391		•		•			•	•	•			
471		•		•			•	•	•			
561		•		•			•	•	•			
681		•		•			•	•	•			
821			•	•			•					
102			•	•	•		•			•	•	
122				•	•							
152				•	•							
182						•						
222						•						

\* Denotes non standard chip thickness.  
Order code needs to have an 'X' inserted together with the dimension in inches -e.g. X080 where dimension is 0.080"