



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



1 Amp Schottky Rectifier LSM140 — LSM150

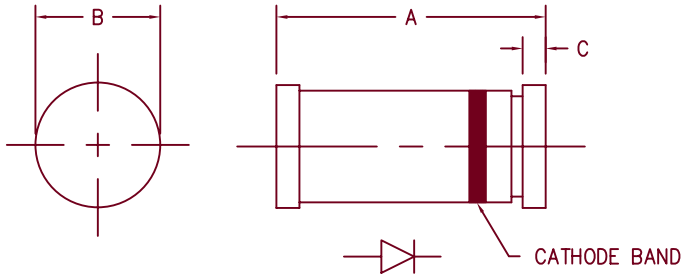

Dim.	Inches		Millimeter		Notes
	Minimum	Maximum	Minimum	Maximum	
A	.189	.205	4.80	5.20	
B	.094	.105	2.39	2.66	Dia.
C	.016	.022	.41	.55	

GLASS HERMETIC D0213AB

Microsemi Catalog Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage	Device Marking
LSM140	40V	40V	L140
LSM145	45V	45V	L145
LSM150	50V	50V	L150

- Low Forward Voltage
- Schottky Barrier Rectifier
- Guard Ring Protection
- 150°C Junction Temperature
- VRRM 40 to 50 Volts

Electrical Characteristics		
Average forward current	I _{F(AV)} 1.0 Amps	T _A = 124°C, Square wave, R _{θJC} = 45°C/W 8.3ms, half sine, T _J = 150°C I _{FM} = 0.1A: T _J = 25°C* I _{FM} = 1.0A: T _J = 25°C* V _{RRM, T_J} = 25°C V _R = 5.0V, T _J = 25°C
Maximum surge current	I _{FSM} 50 Amps	
Max peak forward voltage	V _{FM} .39 Volts	
Max peak forward voltage	V _{FM} .58 Volts	
Max peak reverse current	I _{RM} 1.0 mA	
Typical junction capacitance	C _J 60pF	
*Pulse test: Pulse width 300 μsec. Duty cycle 2%		

Thermal and Mechanical Characteristics		
Storage temperature range	T _{STG}	-65°C to 150°C
Operating junction temp range	T _J	-65°C to 150°C
Typical thermal Resistance	R _{θJC}	45°C/W Junction to Case
Weight		.0047 ounces (.012 grams) typical



8700 East Thomas Road, P.O. Box 1390
Scottsdale, AZ 85252
PH: (480) 941-6300
FAX: (480) 947-1503
www.microsemi.com

05-15-07 Rev. 1

LSM140 — LSM150

Figure 1
Maximum Forward Characteristics

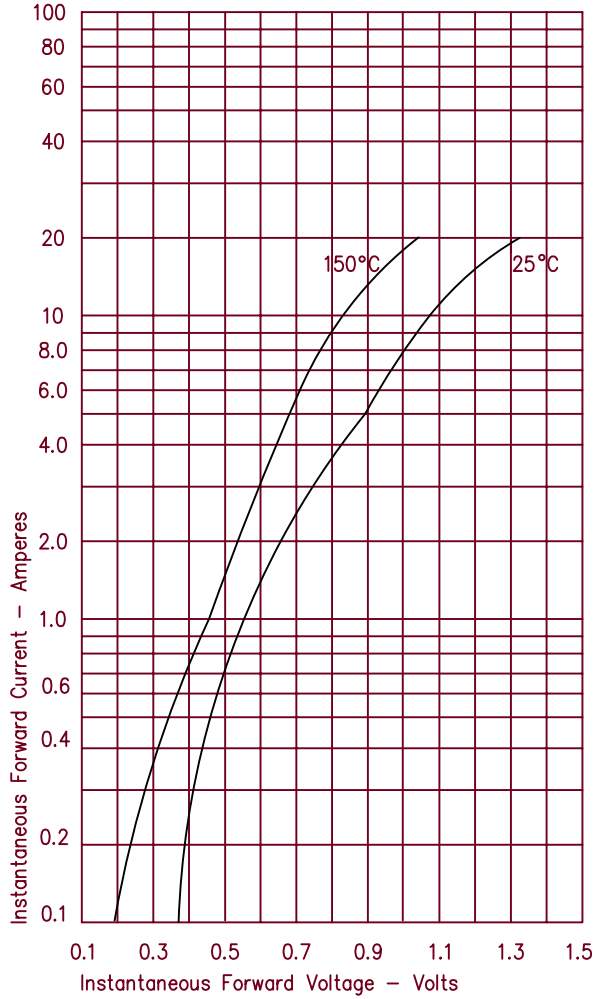


Figure 3
Typical Junction Capacitance

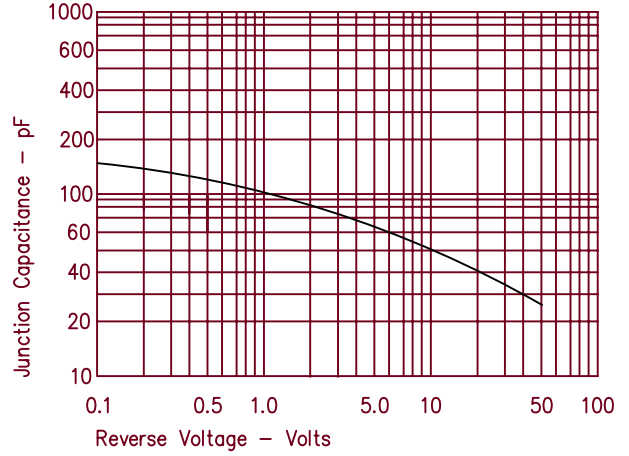


Figure 2
Typical Reverse Characteristics

