



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



FEATURES

- Operates from 1.8V to 6V
- 0.01 μ A Standby Current
- 95 μ A Operating Current per Channel at 3.3V
- Fully Enhances N-Channel Switches
- No External Charge Pump Components
- Built-In Gate Voltage Clamps
- Easily Protected Against Supply Transients
- Controlled Switching ON and OFF Times
- Compatible with 5V, 3V and Sub-3V Logic Families
- Available in 8-Pin SOIC

APPLICATIONS

- PCMCIA Card 3.3V/5V Switch
- 2-Cell High-Side Load Switching
- Boost Regulator Shutdown to Zero Standby Current
- Replacing P-Channel Switches
- Notebook Computer Power Management
- Palmtop Computer Power Management
- Portable Medical Equipment
- Mixed 3.3V and 5V Supply Switching

DESCRIPTION


The LTC1163/LTC1165 triple low voltage MOSFET drivers make it possible to switch supply or ground referenced loads through inexpensive, low $R_{DS(ON)}$ N-channel switches from as little as a 1.8V supply. The LTC1165 has inverting inputs and makes it possible to directly replace P-channel MOSFET switches while maintaining system drive polarity. The LTC1163 has noninverting inputs.

Micropower operation, with 0.01 μ A standby current and 95 μ A operating current, coupled with a power supply range of 1.8V to 6V, make the LTC1163/LTC1165 ideally suited for 2- to 4-cell battery-powered applications. The LTC1163/LTC1165 are also well suited for sub-3V, 3.3V and 5V nominal supply applications.


The LTC1163/LTC1165 internal charge pumps boost the gate voltage 8V above a 3.3V rail, fully enhancing inexpensive N-channels for high- or low-side switch applications.

The LTC1163/LTC1165 are available in both an 8-pin DIP and an 8-pin SOIC.

TYPICAL APPLICATION

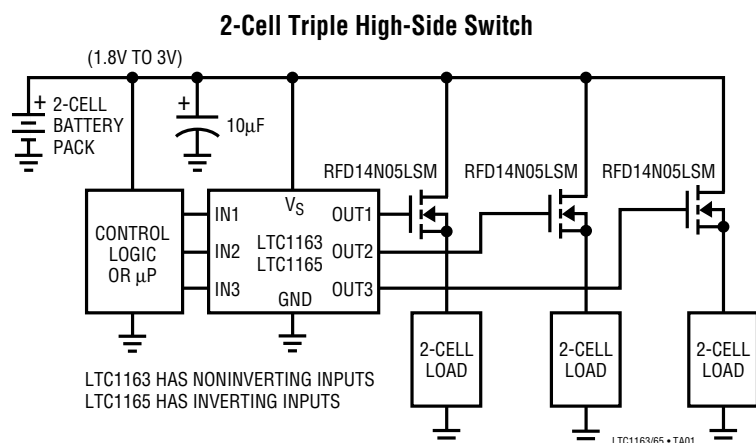

MOSFET Switch Gate Voltage

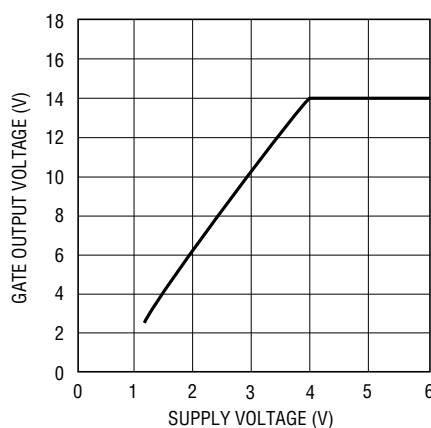



LTC1163/65 • TA02

ABSOLUTE MAXIMUM RATINGS

Supply Voltage 7V
 Any Input Voltage 7V to (GND – 0.3V)
 Any Output Voltage 20V to (GND – 0.3V)
 Current (Any Pin) 50mA

Operating Temperature Range
 LTC1163C/LTC1165C 0°C to 70°C
 Storage Temperature Range –65°C to 150°C
 Lead Temperature (Soldering, 10 sec) 300°C

PACKAGE/ORDER INFORMATION

 N8 PACKAGE 8-LEAD PLASTIC DIP $T_{JMAX} = 100^{\circ}\text{C}$, $\theta_{JA} = 130^{\circ}\text{C/W}$	ORDER PART NUMBER	 S8 PACKAGE 8-LEAD PLASTIC SOIC $T_{JMAX} = 100^{\circ}\text{C}$, $\theta_{JA} = 150^{\circ}\text{C/W}$	ORDER PART NUMBER
	LTC1163CN8 LTC1165CN8		LTC1163CS8 LTC1165CS8
		S8 PART MARKING	
		1163 1165	

ELECTRICAL CHARACTERISTICS $V_S = 1.8\text{V to }6\text{V}$, $T_A = 25^{\circ}\text{C}$, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS		LTC1163C/LTC1165C			UNITS
				MIN	TYP	MAX	
I _Q	Quiescent Current OFF	V _S = 1.8V, V _{IN1} = V _{IN2} = V _{IN3} = V _{OFF} (Note 1,2)		0.01	1	μA	
		V _S = 3.3V, V _{IN1} = V _{IN2} = V _{IN3} = V _{OFF} (Note 1,2)		0.01	1	μA	
		V _S = 5V, V _{IN1} = V _{IN2} = V _{IN3} = V _{OFF} (Note 1,2)		0.01	1	μA	
	Quiescent Current ON	V _S = 1.8V, V _{IN} = V _{ON} (Note 2,3)		60	120	μA	
		V _S = 3.3V, V _{IN} = V _{ON} (Note 2,3)		95	200	μA	
V _S = 5V, V _{IN} = V _{ON} (Note 2,3)			180	400	μA		
V _{INH}	Input High Voltage	1.8V < V _S < 2.7V	●	80% × V _S		V	
		2.7V < V _S < 6V	●	70% × V _S		V	
V _{INL}	Input Low Voltage	1.8V < V _S < 6V	●	15% × V _S		V	
I _{IN}	Input Current	0V ≤ V _{IN} ≤ V _S	●	±1		μA	
C _{IN}	Input Capacitance			5		pF	
V _{GATE} – V _S	Gate Voltage Above Supply	V _S = 1.8V, V _{IN} = V _{ON} (Note 2)	●	3.5	4.1	6.0	V
		V _S = 2V, V _{IN} = V _{ON} (Note 2)	●	4.0	4.6	7.0	V
		V _S = 2.2V, V _{IN} = V _{ON} (Note 2)	●	4.5	5.2	8.0	V
		V _S = 3.3V, V _{IN} = V _{ON} (Note 2)	●	6.0	8.0	9.5	V
		V _S = 5V, V _{IN} = V _{ON} (Note 2)	●	5.0	9.0	13.0	V
t _{ON}	Turn-ON Time	V _S = 3.3V, C _{GATE} = 1000pF					
		Time for V _{GATE} > V _S + 1V		40	120	400	μs
		Time for V _{GATE} > V _S + 2V		60	180	600	μs
		V _S = 5V, C _{GATE} = 1000pF					
		Time for V _{GATE} > V _S + 1V		30	95	300	μs
		Time for V _{GATE} > V _S + 2V		40	130	400	μs

ELECTRICAL CHARACTERISTICS $V_S = 1.8V$ to $6V$, $T_A = 25^\circ C$, unless otherwise noted.

SYMBOL	PARAMETER	CONDITIONS	LTC1163C/LTC1165C			UNITS
			MIN	TYP	MAX	
t_{OFF}	Turn-Off Time	$V_S = 3.3V$, $C_{GATE} = 1000pF$ Time for $V_{GATE} < 0.5V$	20	65	200	μs
		$V_S = 5V$, $C_{GATE} = 1000pF$ Time for $V_{GATE} < 0.5V$	15	45	150	μs

The ● denotes specifications which apply over the full operating temperature range.


Note 1: Quiescent current OFF is for all channels in OFF condition.

Note 2: LTC1163: $V_{OFF} = 0V$, $V_{ON} = V_S$. LTC1165: $V_{OFF} = V_S$, $V_{ON} = 0V$


Note 3: Quiescent current ON is per driver and is measured independently.

TYPICAL PERFORMANCE CHARACTERISTICS


Standby Supply Current

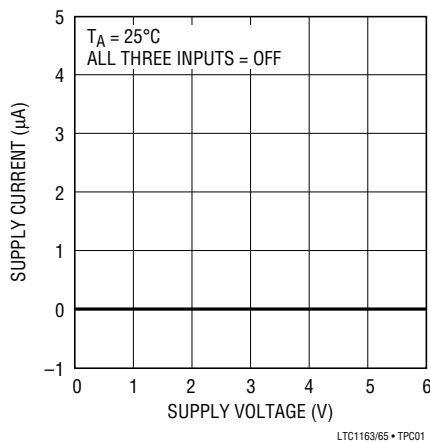


Supply Current per Driver ON

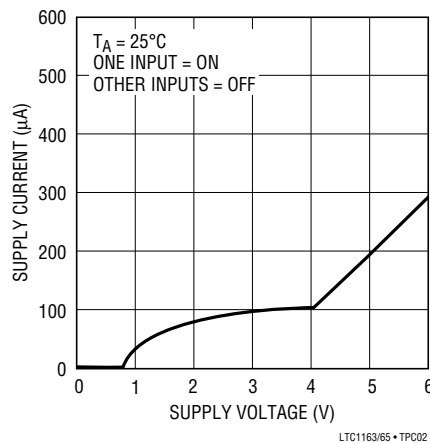


Gate Voltage Above Supply

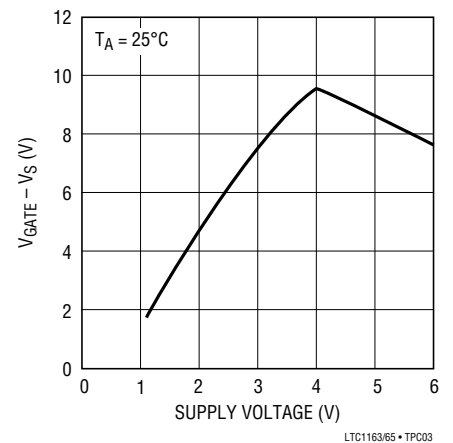


Input Threshold Voltage

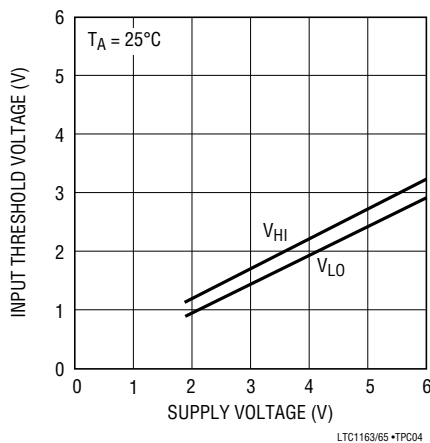


Turn-ON Time

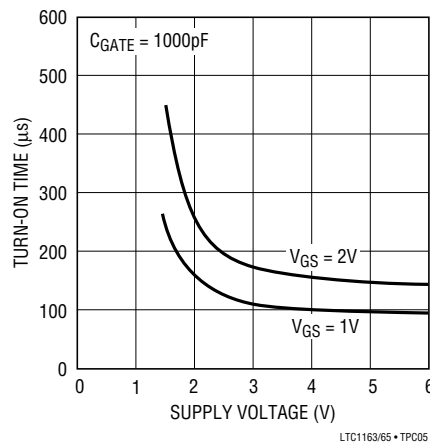

Turn-OFF Time

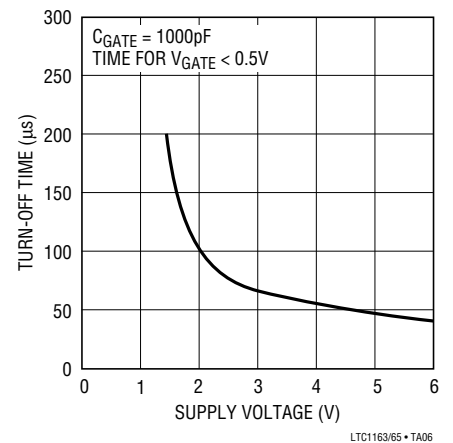

TYPICAL PERFORMANCE CHARACTERISTICS

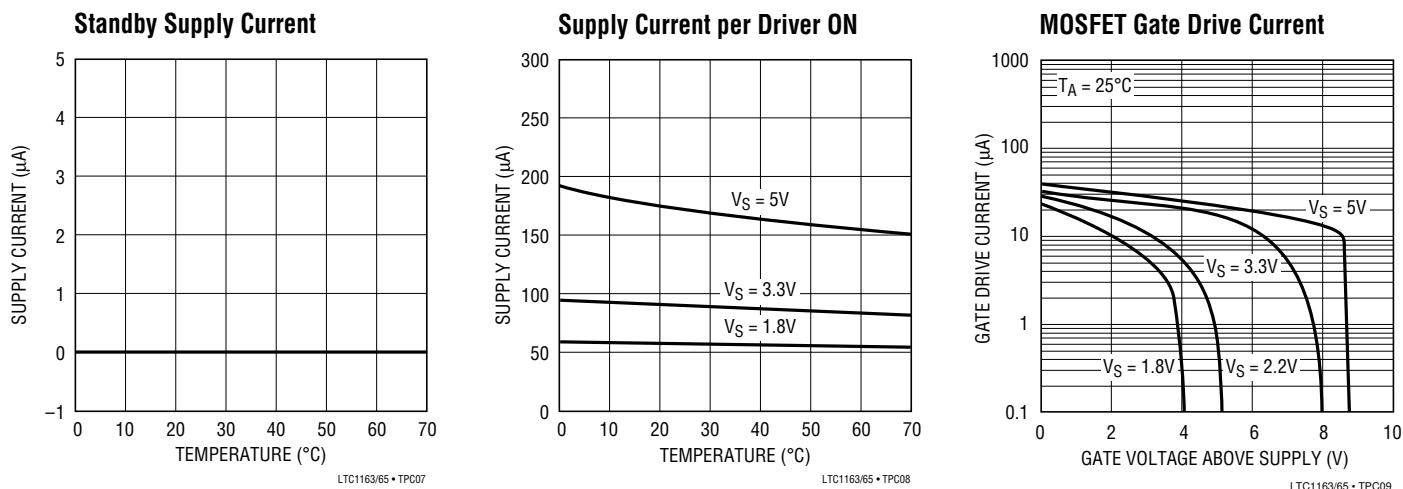

PIN FUNCTIONS

Input Pins

The LTC1163 is noninverting; i.e., the MOSFET gate is driven above the supply when the input pin is held high. The LTC1165 is inverting and drives the MOSFET gate high when the input pin is held low. The inverting inputs of the LTC1165 allow P-channel switches to be replaced by lower resistance/cost N-channel switches while maintaining system drive polarity.

The LTC1163/LTC1165 logic inputs are high impedance CMOS gates with ESD protection diodes to ground and therefore should not be forced below ground. The inputs can however, be driven above the power supply rail as there are no clamping diodes connected between the input pins and supply pin. This facilitates operation in mixed 5V/3V systems.

Output Pins

The output pin is either driven to ground when the switch is turned OFF or driven above the supply rail when the switch is turned ON. The output is clamped to about 14V above ground by a built-in Zener clamp. This pin has a relatively high impedance when driven above the rail (the equivalent of a few hundred $\text{k}\Omega$). Care should be taken to minimize any loading of this pin by parasitic resistance to ground or supply.

Supply Pin

A 150Ω resistor should be inserted in series with the ground pin or supply pin if negative supply voltage transients are anticipated. This will limit the current flowing from the power source into the LTC1163/LTC1165 to tens of milliamps during reverse battery conditions.

OPERATION

The LTC1163/LTC1165 are triple micropower MOSFET drivers designed for operation over the 1.8V to 6V supply range and include the following functional blocks:

3V Logic Compatible Inputs

The LTC1163/LTC1165 inputs have been designed to accommodate a wide range of 3V and 5V logic families.

The input threshold voltage is set at roughly 50% of the supply voltage and approximately 200mV of input hysteresis is provided to ensure clean switching.

The input enables all of the following circuit blocks: the bias generator, the high frequency oscillator and gate charge pump. Therefore, when the input is turned off, the entire circuit powers down and the supply current drops below $1\mu\text{A}$.

When the input is switched ON and OFF, the gate is charged by the internal charge pump and discharged in a controlled manner. The charge and discharge rates have been set to minimize RFI and EMI emissions.

APPLICATIONS INFORMATION

5

APPLICATIONS INFORMATION

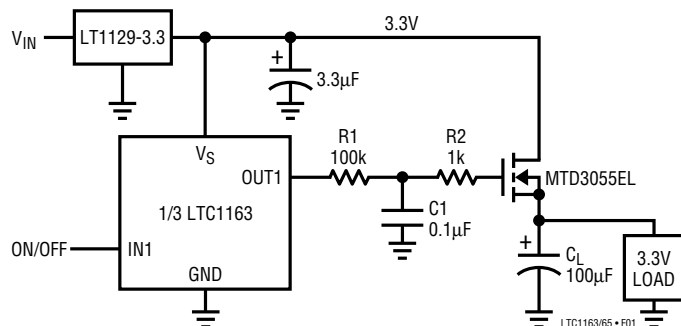


Figure 1. Powering a Large Capacitive Load

managed by the system regulator. R2 is required to eliminate the possibility of parasitic MOSFET oscillations during switch transitions. It is a good practice to isolate the gates of paralleled MOSFETs with 1k resistors to decrease the possibility of interaction between switches.

Mixed 5V/3V Systems

Because the input ESD protection diodes are referenced to ground instead of the supply pin, it is possible to drive the LTC1163/LTC1165 inputs from 5V CMOS or TTL logic even though the LTC1163/LTC1165 are powered from a 3.3V supply as shown in Figure 2. The input threshold voltage is approximately 50% of the supply voltage or 1.6V

on a 3.3V supply which is compatible with 5V TTL and CMOS logic. (The LTC1163/LTC1165 cannot however, be driven by 3V logic when powered from a 5V supply because the threshold is approximately 2.5V.)

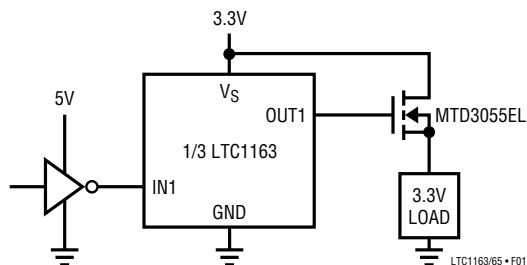



Figure 2. Direct Interface to 5V Logic

Reverse Battery Protection

The LTC1163/LTC1165 can be protected against reverse battery conditions by connecting a 150Ω resistor in series with the ground pin or supply pin. The resistor limits the supply current to less than 24mA with -3.6V applied. Because the LTC1163/LTC1165 draw very little current while in normal operation, the drop across the resistor is minimal. The 3.3V μ P (or control logic) can be protected by adding 10k resistors in series with the input pins.



TYPICAL APPLICATIONS

PCMCIA Card 3.3V/5V V_{CC} Switch

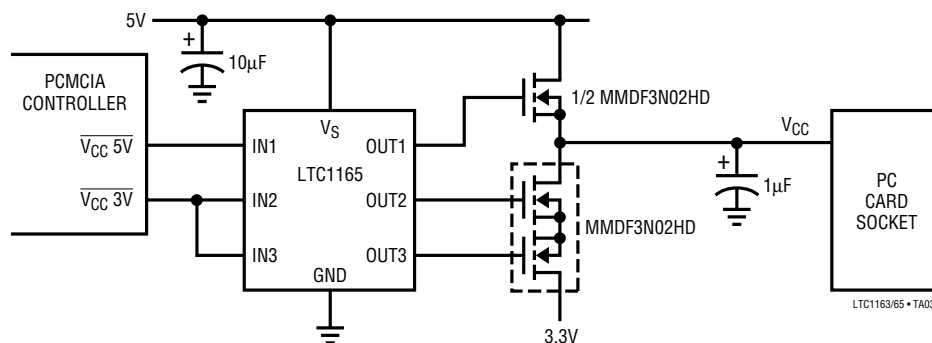


NOTE: USE LTC1163 WITH NONINVERTING PCMCIA CONTROLLERS

TYPICAL APPLICATIONS

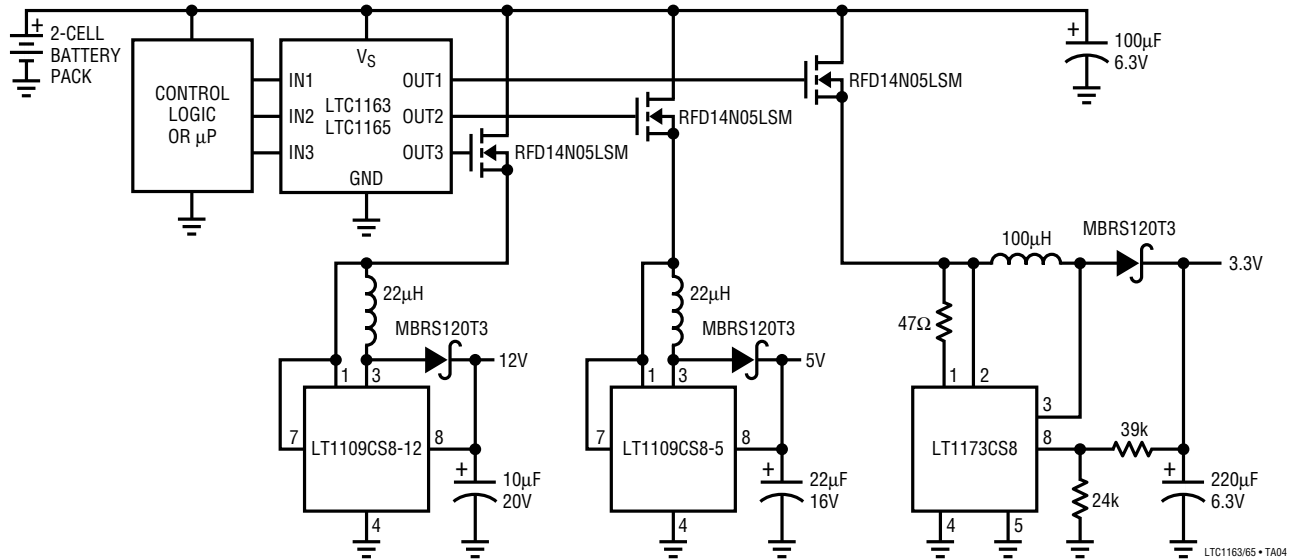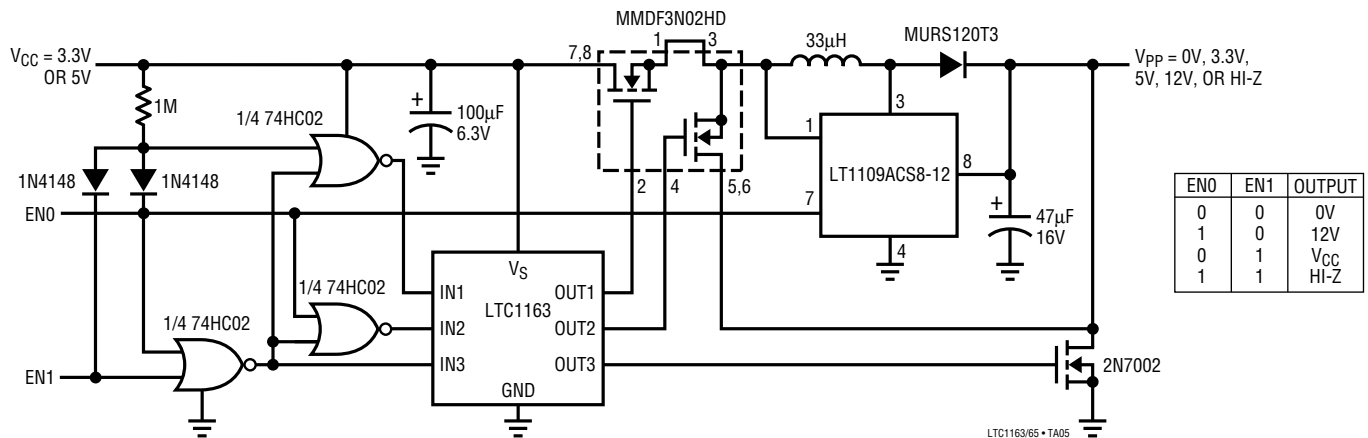
2-Cell to 3.3V, 5V and 12V High-Side Switch/Converter
with 0.01 μ A Standby CurrentPCMCIA Card Socket V_{PP} Switch/Regulator

Ultra-Low Drop Triple 3.3V High-Side Switch

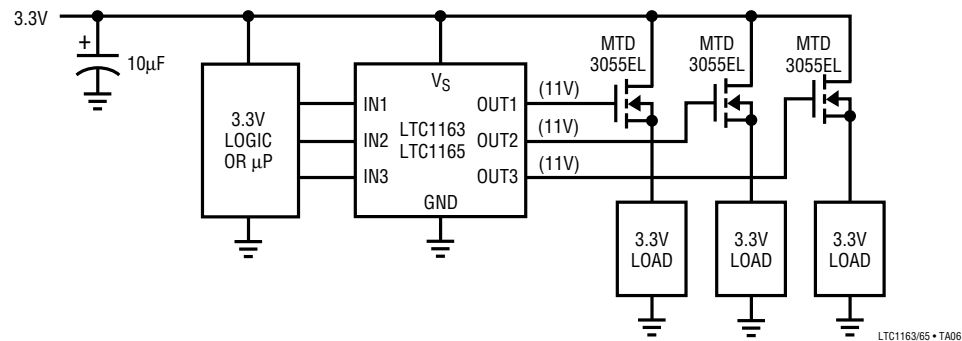


TYPICAL APPLICATIONS




Mixed Voltage High- and Low-Side Switches

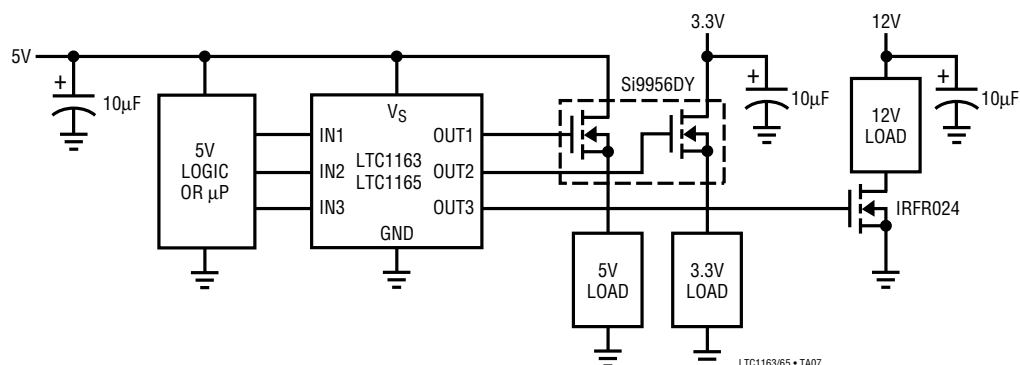

3-Cell to 3.3V Ultra-Low Drop Regulator with 2 Ramped Switches

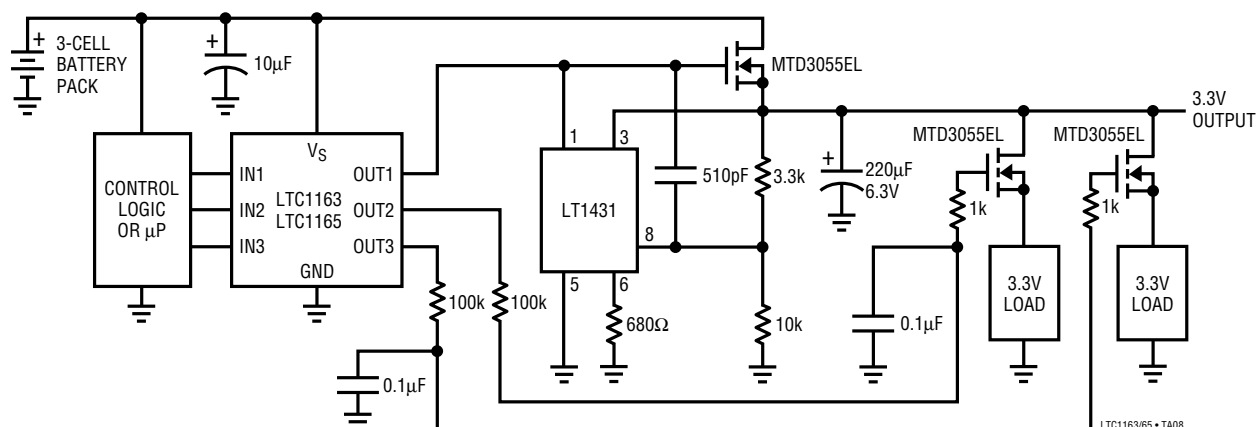

PACKAGE DESCRIPTION Dimensions in inches (millimeters) unless otherwise noted.

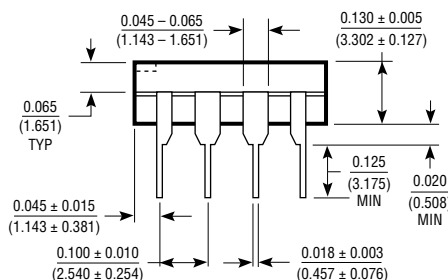N8 Package
8-Lead
Plastic DIPS8 Package
8-Lead
Plastic SOIC