



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# 100MHz to 40GHz Linear-in-dB RMS Power Detector with 35dB Dynamic Range

## FEATURES

- Ultra Wide Matched Input Frequency Range: 100MHz to 40GHz
- 35dB Linear Dynamic Range ( $< \pm 1\text{dB}$  Error)
- 29mV/dB Logarithmic Slope
- $\pm 1\text{dB}$  Flat Response from 200MHz to 30GHz
- Accurate RMS Power Measurement of High Crest Factors (Up to 12dB) Modulated Waveforms
- Low Power Shutdown Mode
- Low Supply Current: 30mA at 3.3V (Typical)
- Small 2mm  $\times$  2mm Plastic DFN8 Package
- I-Grade:  $-40^\circ\text{C}$  to  $105^\circ\text{C}$  Rated  
 H-Grade:  $-40^\circ\text{C}$  to  $125^\circ\text{C}$  Rated  
 with Guaranteed Log-Slope and Log-Intercept
- ESD Rating: 3500V HBM, 1500V CDM

## APPLICATIONS

- Point-to-Point Microwave Links
- Instrumentation and Measurement Equipment
- Military Radios
- LTE, WiFi, WiMax Wireless Networks
- RMS Power Measurement
- Receive and Transmit Gain Control
- RF PA Transmit Power Control

## DESCRIPTION

The **LTC<sup>®</sup>5596** is a high accuracy RMS power detector that provides a very wide RF input bandwidth, from 100MHz up to 40GHz. This makes the device suitable for a wide range of RF and microwave applications, such as point-to-point microwave links, instrumentation and power control applications.

The DC output voltage of the detector is an accurate representation of the average signal power applied to the RF input. The response is linear-in-dB with 29mV/dB logarithmic slope over a 35dB dynamic range with typically better than  $\pm 1\text{dB}$  accuracy. The detector is particularly suited for measurement of waveforms with crest factor (CF) as high as 12dB, and waveforms that exhibit a significant variation of the crest factor during the measurement.


To achieve higher accuracy and lower output ripple, the averaging bandwidth can be externally adjusted by a capacitor connected between the FLTR and OUT pins.

The enable interface switches the device between active measurement mode and a low power shutdown mode.


LT, LT, LTC, LTM, Linear Technology and the Linear logo are registered trademarks of Linear Technology Corporation. All other trademarks are the property of their respective owners. Protected by U.S. patents, including 9330283 B2.

## TYPICAL APPLICATION

100MHz to 40GHz RMS Power Detector

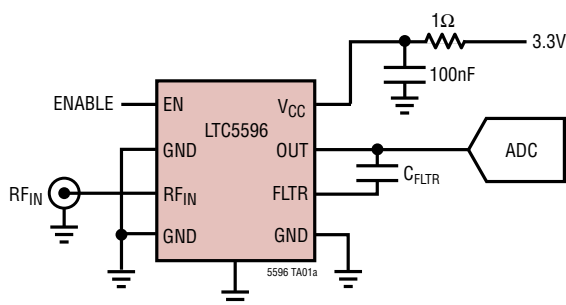

Output Voltage vs Frequency

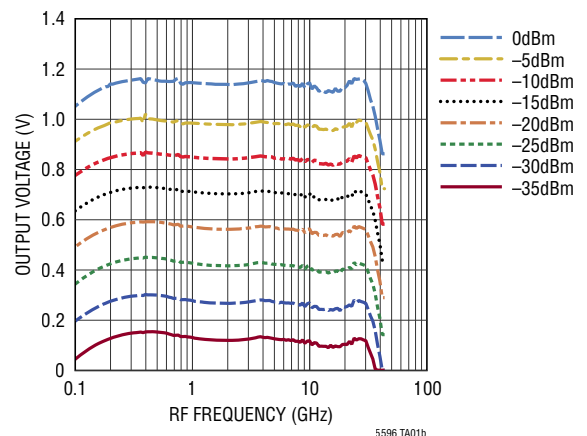


## ABSOLUTE MAXIMUM RATINGS

(Note 1)

Supply Voltage ( $V_{CC}$ ) .....	3.8V
$RF_{IN}$ Input Signal Power - Average.....	15dBm
$RF_{IN}$ Input Signal Power - Peak (Note 2).....	20dBm
DC Voltage at $RF_{IN}$ .....	-0.3V to 1V
DC Voltage at FLTR .....	-0.3V to 0.4V
DC Voltage at EN.....	-0.3V to 3.8V
$T_{JMAX}$ .....	150°C
Case Operating Temperature Range ( $T_C$ ):	
I-Grade (Note 3).....	-40°C to 105°C
H-Grade (Note 4) .....	-40°C to 125°C
Storage Temperature Range .....	-65°C to 150°C

## PIN CONFIGURATION

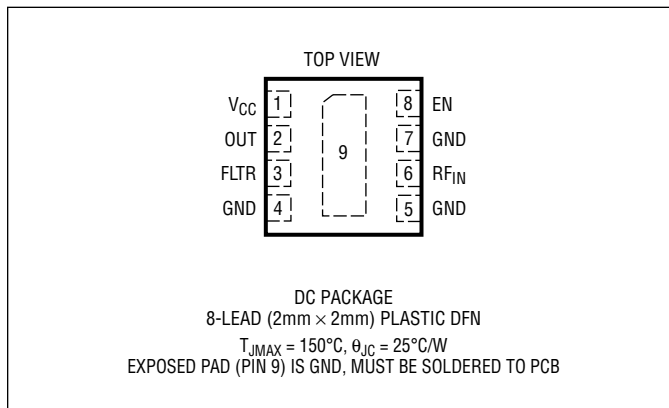

## ORDER INFORMATION <http://www.linear.com/product/LTC5596#orderinfo>

LEAD FREE FINISH	TAPE AND REEL	PART MARKING*	PACKAGE DESCRIPTION	TEMPERATURE RANGE
LTC5596IDC#PBF	LTC5596IDC#TRPBF	LGNN	8-Lead 2mm x 2mm Plastic DFN	-40°C to 105°C
LTC5596HDC#PBF	LTC5596HDC#TRPBF	LGNN	8-Lead 2mm x 2mm Plastic DFN	-40°C to 125°C

Consult LTC Marketing for parts specified with wider operating temperature ranges. \*The temperature grade is identified by a label on the shipping container.

For more information on lead free part marking, go to: <http://www.linear.com/leadfree/>

For more information on tape and reel specifications, go to: <http://www.linear.com/tapeandreel/>. Some packages are available in 500 unit reels through designated sales channels with #TRMPBF suffix.

## ELECTRICAL CHARACTERISTICS

The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_C = 25^\circ\text{C}$ .  $V_{CC} = 3.3\text{V}$ ,  $EN = 3.3\text{V}$ . CW, 50Ω source at  $RF_{IN}$ ,  $f_{RF} = 2140\text{MHz}$ , test circuit is shown in Figure 1. (Note 2).

PARAMETER	CONDITIONS	I-GRADE (NOTE 3)			H-GRADE (NOTE 4)			UNITS
		MIN	TYP	MAX	MIN	TYP	MAX	
<b>RF Input</b>								
Input Frequency Range			0.1 to 40		0.1 to 40			GHz
Input Impedance			52  50		52  50			Ω  fF
<b>Detector Response (<math>RF_{IN}</math> to OUT)</b>								
RF Input Power Range, $T_C = 25^\circ\text{C}$	$f_{RF} = 50\text{MHz}$		-33.2 to 6.3		-33.2 to 6.3			dBm
±1dB LOG-Linearity Error (Note 5, 6)	$f_{RF} = 100\text{MHz}$		-37.1 to 5.8		-37.1 to 5.8			dBm
	$f_{RF} = 500\text{MHz}$		-40.8 to 3.3		-40.8 to 3.3			dBm
	$f_{RF} = 2.14\text{GHz}$		-39.1 to 4.2		-39.1 to 4.2			dBm
	$f_{RF} = 5.8\text{GHz}$		-39.7 to 3.7		-39.7 to 3.7			dBm
	$f_{RF} = 7.6\text{GHz}$		-38.9 to 4.3		-38.9 to 4.3			dBm
	$f_{RF} = 10\text{GHz}$		-39.0 to 4.2		-39.0 to 4.2			dBm
	$f_{RF} = 12\text{GHz}$		-38.5 to 4.5		-38.5 to 4.5			dBm
	$f_{RF} = 15\text{GHz}$		-37.5 to 5.5		-37.5 to 5.5			dBm
	$f_{RF} = 18\text{GHz}$		-38.4 to 4.6		-38.4 to 4.6			dBm
	$f_{RF} = 24\text{GHz}$		-39.3 to 0.2		-39.3 to 0.2			dBm

**ELECTRICAL CHARACTERISTICS** The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_C = 25^\circ\text{C}$ .  $V_{CC} = 3.3\text{V}$ ,  $EN = 3.3\text{V}$ . CW,  $50\Omega$  source at  $RF_{IN}$ ,  $f_{RF} = 2140\text{MHz}$ , test circuit is shown in Figure 1. (Note 2).

PARAMETER	CONDITIONS		I-GRADE (NOTE 3)			H-GRADE (NOTE 4)			UNITS
			MIN	TYP	MAX	MIN	TYP	MAX	
	$f_{RF} = 26\text{GHz}$			-37.8 to 5.0			-37.8 to 5.0	dBm	
	$f_{RF} = 28\text{GHz}$			-40.1 to -0.6			-40.1 to -0.6	dBm	
	$f_{RF} = 30\text{GHz}$			-39.8 to 3.1			-39.8 to 3.1	dBm	
	$f_{RF} = 35\text{GHz}$			-37.3 to 3.1			-37.3 to 3.1	dBm	
	$f_{RF} = 38\text{GHz}$			-34.2 to 3.6			-34.2 to 3.6	dBm	
	$f_{RF} = 40\text{GHz}$			-32.6 to 2.9			-32.6 to 2.9	dBm	
	$f_{RF} = 43.5\text{GHz}$			-28.2 to 4.6			-28.2 to 4.6	dBm	
RF Input Power Range Over Operating Temperature Range	$f_{RF} = 50\text{MHz}$	●		-33.2 to 4.6			-28.4 to 3.0	dBm	
$\pm 1\text{dB LOG-Linearity Error}$ (Note 5, 6)	$f_{RF} = 100\text{MHz}$	●		-37.1 to 5.0			-37.1 to 3.0	dBm	
	$f_{RF} = 500\text{MHz}$	●		-37.4 to -1.2			-35.9 to -1.2	dBm	
	$f_{RF} = 2.14\text{GHz}$	●		-39.1 to -0.2			-35.2 to -0.2	dBm	
	$f_{RF} = 5.8\text{GHz}$	●		-39.6 to -0.7			-35.3 to -0.7	dBm	
	$f_{RF} = 7.6\text{GHz}$	●		-38.7 to -0.2			-34.7 to -0.2	dBm	
	$f_{RF} = 10\text{GHz}$	●		-38.8 to -0.5			-34.5 to -0.5	dBm	
	$f_{RF} = 12\text{GHz}$	●		-36.0 to 0.3			-34.1 to 0.3	dBm	
	$f_{RF} = 15\text{GHz}$	●		-37.3 to 1.4			-33.5 to 1.4	dBm	
	$f_{RF} = 18\text{GHz}$	●		-38.2 to -0.1			-35.2 to -0.1	dBm	
	$f_{RF} = 24\text{GHz}$	●		-39.3 to -1.2			-36.0 to -1.2	dBm	
	$f_{RF} = 26\text{GHz}$	●		-37.3 to -0.1			-34.8 to -0.1	dBm	
	$f_{RF} = 28\text{GHz}$	●		-40.0 to -2.5			-36.4 to -2.5	dBm	
	$f_{RF} = 30\text{GHz}$	●		-39.8 to -2.1			-35.3 to -2.1	dBm	
$\pm 1.5\text{dB LOG-Linearity Error}$	$f_{RF} = 35\text{GHz}$	●		-37.7 to 1.3			-32.3 to -1.5	dBm	
$\pm 1.5\text{dB LOG-Linearity Error}$	$f_{RF} = 38\text{GHz}$	●		-34.4 to 2.3			-29.2 to -0.2	dBm	
$\pm 1.5\text{dB LOG-Linearity Error}$	$f_{RF} = 40\text{GHz}$	●		-33.1 to 1.7			-27.1 to -0.9	dBm	
$\pm 1.5\text{dB LOG-Linearity Error}$	$f_{RF} = 43.5\text{GHz}$	●		-28.3 to 3.1			-22.1 to 0.3	dBm	
Linear Dynamic Range, $T_C = 25^\circ\text{C}$ (Note 6)	$f_{RF} = 50\text{MHz}$			39.5			39.5	dB	
	$f_{RF} = 100\text{MHz}$			42.9			42.9	dB	
	$f_{RF} = 500\text{MHz}$			44.1			44.1	dB	
	$f_{RF} = 2.14\text{GHz}$			43.3			43.3	dB	
	$f_{RF} = 5.8\text{GHz}$			43.3			43.3	dB	
	$f_{RF} = 7.6\text{GHz}$			43.2			43.2	dB	
	$f_{RF} = 10\text{GHz}$			43.1			43.1	dB	
	$f_{RF} = 12\text{GHz}$			43.1			43.1	dB	
	$f_{RF} = 15\text{GHz}$			43.0			43.0	dB	
	$f_{RF} = 18\text{GHz}$			43.0			43.0	dB	
	$f_{RF} = 24\text{GHz}$			39.5			39.5	dB	
	$f_{RF} = 26\text{GHz}$			42.8			42.8	dB	
	$f_{RF} = 28\text{GHz}$			39.5			39.5	dB	
	$f_{RF} = 30\text{GHz}$			43.0			43.0	dB	

**ELECTRICAL CHARACTERISTICS** The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_C = 25^\circ\text{C}$ .  $V_{CC} = 3.3\text{V}$ ,  $EN = 3.3\text{V}$ . CW,  $50\Omega$  source at  $RF_{IN}$ ,  $f_{RF} = 2140\text{MHz}$ , test circuit is shown in Figure 1. (Note 2).

PARAMETER	CONDITIONS	I-GRADE (NOTE 3)			H-GRADE (NOTE 4)			UNITS
		MIN	TYP	MAX	MIN	TYP	MAX	
	$f_{RF} = 35\text{GHz}$		40.4			40.4		dB
	$f_{RF} = 38\text{GHz}$		37.7			37.7		dB
	$f_{RF} = 40\text{GHz}$		35.6			35.6		dB
	$f_{RF} = 43.5\text{GHz}$		32.8			32.8		dB
Linear Dynamic Range Over Operating Temperature Range (Note 6)	$f_{RF} = 50\text{MHz}$	●	37.8			31.4		dB
	$f_{RF} = 100\text{MHz}$	●	42.1			40.1		dB
	$f_{RF} = 500\text{MHz}$	●	36.2			34.7		dB
	$f_{RF} = 2.14\text{GHz}$	●	38.9			35.1		dB
	$f_{RF} = 5.8\text{GHz}$	●	38.8			34.6		dB
	$f_{RF} = 7.6\text{GHz}$	●	38.5			34.5		dB
	$f_{RF} = 10\text{GHz}$	●	38.3			34.0		dB
	$f_{RF} = 12\text{GHz}$	●	36.3			34.4		dB
	$f_{RF} = 15\text{GHz}$	●	38.7			35.0		dB
	$f_{RF} = 18\text{GHz}$	●	38.1			35.1		dB
	$f_{RF} = 24\text{GHz}$	●	38.1			34.8		dB
	$f_{RF} = 26\text{GHz}$	●	37.2			34.8		dB
	$f_{RF} = 28\text{GHz}$	●	37.6			33.9		dB
	$f_{RF} = 30\text{GHz}$	●	37.7			33.2		dB
	$f_{RF} = 35\text{GHz}$	●	39.0			30.7		dB
	$f_{RF} = 38\text{GHz}$	●	36.7			29.0		dB
$f_{RF} = 40\text{GHz}$	●	34.7			26.2		dB	
$f_{RF} = 43.5\text{GHz}$	●	31.4			22.4		dB	
Logarithmic Slope, $T_C = 25^\circ\text{C}$ (Note 7)	$f_{RF} = 50\text{MHz}$		28.2			27.2		mV/dB
	$f_{RF} = 100\text{MHz}$		28.9			28.9		mV/dB
	$f_{RF} = 500\text{MHz}$		28.2			28.2		mV/dB
	$f_{RF} = 2.14\text{GHz}$		29.3		28.0	29.3	30.5	mV/dB
	$f_{RF} = 5.8\text{GHz}$		28.7			28.7		mV/dB
	$f_{RF} = 7.6\text{GHz}$		28.8			28.8		mV/dB
	$f_{RF} = 10\text{GHz}$		28.8			28.8		mV/dB
	$f_{RF} = 12\text{GHz}$		28.9			28.9		mV/dB
	$f_{RF} = 15\text{GHz}$		29.0			29.0		mV/dB
	$f_{RF} = 18\text{GHz}$		28.9			28.9		mV/dB
	$f_{RF} = 24\text{GHz}$		28.9			28.9		mV/dB
	$f_{RF} = 26\text{GHz}$		29.1			29.1		mV/dB
	$f_{RF} = 28\text{GHz}$		29.1			29.1		mV/dB
	$f_{RF} = 30\text{GHz}$		28.9			28.9		mV/dB
	$f_{RF} = 35\text{GHz}$		29.0			29.0		mV/dB
	$f_{RF} = 38\text{GHz}$		29.2			29.2		mV/dB
$f_{RF} = 40\text{GHz}$		29.5			29.5		mV/dB	
$f_{RF} = 43.5\text{GHz}$		29.7			29.7		mV/dB	

5596f

**ELECTRICAL CHARACTERISTICS** The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_C = 25^\circ\text{C}$ .  $V_{CC} = 3.3\text{V}$ ,  $EN = 3.3\text{V}$ . CW,  $50\Omega$  source at  $RF_{IN}$ ,  $f_{RF} = 2140\text{MHz}$ , Test circuit is shown in Figure 1. (Note 2).

PARAMETER	CONDITIONS	I-GRADE (NOTE 3)			H-GRADE (NOTE 4)			UNITS
		MIN	TYP	MAX	MIN	TYP	MAX	
Logarithmic Slope Over Operating Temperature Range (Note 7)	$f_{RF} = 50\text{MHz}$	●	27.6 to 28.6		27.6 to 28.6			mV/dB
	$f_{RF} = 100\text{MHz}$	●	28.2 to 29.4		28.2 to 29.4			mV/dB
	$f_{RF} = 500\text{MHz}$	●	27.4 to 28.9		27.4 to 28.9			mV/dB
	$f_{RF} = 2.14\text{GHz}$	●	28.0 to 29.5		27.5	28.0 to 29.5	31.0	mV/dB
	$f_{RF} = 5.8\text{GHz}$	●	28.0 to 29.4		28.0 to 29.4			mV/dB
	$f_{RF} = 7.6\text{GHz}$	●	28.1 to 29.5		28.1 to 29.5			mV/dB
	$f_{RF} = 10\text{GHz}$	●	28.1 to 29.5		28.1 to 29.5			mV/dB
	$f_{RF} = 12\text{GHz}$	●	28.2 to 29.5		28.2 to 29.5			mV/dB
	$f_{RF} = 15\text{GHz}$	●	28.3 to 29.4		28.3 to 29.4			mV/dB
	$f_{RF} = 18\text{GHz}$	●	28.2 to 29.6		28.2 to 29.6			mV/dB
	$f_{RF} = 24\text{GHz}$	●	28.3 to 29.5		28.3 to 29.5			mV/dB
	$f_{RF} = 26\text{GHz}$	●	28.4 to 29.6		28.4 to 29.6			mV/dB
	$f_{RF} = 28\text{GHz}$	●	28.4 to 29.6		28.3 to 29.5			mV/dB
	$f_{RF} = 30\text{GHz}$	●	28.3 to 29.5		28.3 to 29.5			mV/dB
	$f_{RF} = 35\text{GHz}$	●	28.4 to 29.3		28.4 to 29.3			mV/dB
	$f_{RF} = 38\text{GHz}$	●	28.6 to 29.4		28.6 to 29.4			mV/dB
$f_{RF} = 40\text{GHz}$	●	28.8 to 29.7		28.8 to 29.7			mV/dB	
$f_{RF} = 43.5\text{GHz}$	●	29.2 to 29.7		29.1 to 29.7			mV/dB	
Logarithmic Intercept, $T_C = 25^\circ\text{C}$ (Note 8)	$f_{RF} = 50\text{MHz}$		-33.1		-33.1			dBm
	$f_{RF} = 100\text{MHz}$		-36.2		-36.2			dBm
	$f_{RF} = 500\text{MHz}$		-39.9		-39.9			dBm
	$f_{RF} = 2.14\text{GHz}$		-39.0		-40.5	-39.0	-37.3	dBm
	$f_{RF} = 5.8\text{GHz}$		-38.7		-38.7			dBm
	$f_{RF} = 7.6\text{GHz}$		-37.9		-37.9			dBm
	$f_{RF} = 10\text{GHz}$		-38.0		-38.0			dBm
	$f_{RF} = 12\text{GHz}$		-37.6		-37.6			dBm
	$f_{RF} = 15\text{GHz}$		-36.5		-36.5			dBm
	$f_{RF} = 18\text{GHz}$		-37.4		-37.4			dBm
	$f_{RF} = 24\text{GHz}$		-38.4		-38.4			dBm
	$f_{RF} = 26\text{GHz}$		-36.8		-36.8			dBm
	$f_{RF} = 28\text{GHz}$		-37.1		-37.1			dBm
	$f_{RF} = 30\text{GHz}$		-38.9		-38.9			dBm
	$f_{RF} = 35\text{GHz}$		-36.3		-36.3			dBm
	$f_{RF} = 38\text{GHz}$		-33.2		-33.2			dBm
$f_{RF} = 40\text{GHz}$		-31.7		-31.7			dBm	
$f_{RF} = 43.5\text{GHz}$		-27.2		-27.2			dBm	
Logarithmic Intercept Over Operating Temperature Range (Note 8)	$f_{RF} = 50\text{MHz}$	●	-32.6 to -31.5		-32.6 to -31.3			dBm
	$f_{RF} = 100\text{MHz}$	●	-36.5 to -35.5		-36.5 to -35.4			dBm
	$f_{RF} = 500\text{MHz}$	●	-40.4 to -38.9		-40.4 to -38.6			dBm
	$f_{RF} = 2.14\text{GHz}$	●	-39.7 to -37.2		-40.8	-39.7 to -37.0	-36.3	dBm

5596f

**ELECTRICAL CHARACTERISTICS** The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_C = 25^\circ\text{C}$ .  $V_{CC} = 3.3\text{V}$ ,  $EN = 3.3\text{V}$ . CW,  $50\Omega$  source at  $RF_{IN}$ ,  $f_{RF} = 2140\text{MHz}$ , input power  $P_{IN} = 0\text{dBm}$ , test circuit is shown in Figure 1. (Note 2).

PARAMETER	CONDITIONS	I-GRADE (NOTE 3)			H-GRADE (NOTE 4)			UNITS
		MIN	TYP	MAX	MIN	TYP	MAX	
	$f_{RF} = 5.8\text{GHz}$	●	-39.2 to -37.7		-39.2 to -37.4			dBm
	$f_{RF} = 7.6\text{GHz}$	●	-38.5 to -36.9		-38.5 to -36.7			dBm
	$f_{RF} = 10\text{GHz}$	●	-38.6 to -37.0		-38.6 to -36.7			dBm
	$f_{RF} = 12\text{GHz}$	●	-38.1 to -36.6		-38.1 to -36.3			dBm
	$f_{RF} = 15\text{GHz}$	●	-37.0 to -35.7		-37.0 to -35.5			dBm
	$f_{RF} = 18\text{GHz}$	●	-38.1 to -36.6		-38.1 to -36.4			dBm
	$f_{RF} = 24\text{GHz}$	●	-38.8 to -37.5		-38.8 to -37.3			dBm
	$f_{RF} = 26\text{GHz}$	●	-37.5 to -36.1		-37.5 to -35.9			dBm
	$f_{RF} = 28\text{GHz}$	●	-37.7 to -36.2		-37.7 to -35.9			dBm
	$f_{RF} = 30\text{GHz}$	●	-39.4 to -38.3		-39.7 to -38.0			dBm
	$f_{RF} = 35\text{GHz}$	●	-37.1 to -35.2		-37.1 to -34.9			dBm
	$f_{RF} = 38\text{GHz}$	●	-34.1 to -32.0		-34.1 to -31.7			dBm
	$f_{RF} = 40\text{GHz}$	●	-32.8 to -30.6		-32.8 to -30.3			dBm
	$f_{RF} = 43.5\text{GHz}$	●	-28.3 to -26.2		-28.3 to -25.9			dBm
Linear Dynamic Range for Various Modulation Formats (Note 9)	CDMA 9Ch fwd		-39.7 to 1.7		-39.7 to 1.7			dB
	CDMA 32Ch fwd		-39.6 to 1.7		-39.6 to 1.7			dB
	CDMA 64Ch fwd		-39.5 to 1.7		-39.5 to 1.7			dB
	CDMA 3 Carriers		-40.4 to 3.0		-40.4 to 3.0			dB
	CDMA 4 Carriers		-40.3 to 2.7		-40.3 to 2.7			dB
	WCDMA 1Ch Up		-39.9 to 1.8		-39.9 to 1.8			dB
	WCDMA 1Ch Down		-39.9 to 1.7		-39.9 to 1.7			dB
	WCDMA 2 Carriers		-40.0 to 1.9		-40.0 to 1.9			dB
	WCDMA 3 Carriers		-40.4 to 2.0		-40.4 to 2.0			dB
	WCDMA 4 Carriers		-40.3 to 1.7		-40.3 to 1.7			dB
	AWGN 5MHz BW		-40.2 to 2.6		-40.2 to 2.6			dB
	AWGN 10MHz BW		-40.2 to 3.1		-40.2 to 3.1			dB
	AWGN 15MHz BW		-40.1 to 3.1		-40.1 to 3.1			dB
	Propagation Delay (Note 10)	Pin from -55dBm to 0dBm		1.2		1.2		

**OUT Interface**

Output DC Voltage	No RF Signal Present $EN = 1.1\text{V}$		1.0	5.0		1.0	5.0	mV
	Pin = 10dBm $EN = 1.1\text{V}$	1.150	1.2	1.250	1.150	1.2	1.250	V
Output Voltage Droop	25mA Sourcing	-35	6	20	-35	6	20	mV
	25mA Sinking		30			30		mV
Integrated Output Noise	1kHz to 6.5kHz $P_{IN} = 0\text{dBm}$		22			22		$\mu\text{V}_{\text{RMS}}$
Rise Time (Note 11)	$50\Omega$ Load at OUT		2.9			2.9		$\mu\text{s}$
Fall Time (Note 12)	$50\Omega$ Load at OUT		8.1			8.1		$\mu\text{s}$

**ELECTRICAL CHARACTERISTICS** The ● denotes the specifications which apply over the full operating temperature range, otherwise specifications are at  $T_C = 25^\circ\text{C}$ .  $V_{CC} = 3.3\text{V}$ ,  $EN = 3.3\text{V}$ . CW,  $50\Omega$  source at  $RF_{IN}$ ,  $f_{RF} = 2140\text{MHz}$ , Test circuit is shown in Figure 1. (Note 2).

PARAMETER	CONDITIONS	I-GRADE (NOTE 3)			H-GRADE (NOTE 4)			UNITS	
		MIN	TYP	MAX	MIN	TYP	MAX		
<b>Enable (EN) Low = Off, High = On</b>									
EN Input High Voltage (On)		●	1.1		1.1			V	
EN Input Low Voltage (Off)		●		0.6			0.6	V	
EN Pin Input Current			50	500		50	500	nA	
Turn ON Time (Note 13)	$50\Omega$ Load at OUT		8			8		$\mu\text{s}$	
Turn OFF Time (Note 14)	$50\Omega$ Load at OUT $1\text{M}\Omega  11\text{pF}$ Load at OUT		45 100			45 100		ns $\mu\text{s}$	
<b>Power Supply</b>									
Supply Voltage		●	2.7	3.3	3.6	2.7	3.3	3.6	V
Active Supply Current	$EN = 3.3\text{V}$		25	30	35	25	30	35	mA
Shutdown Supply Current	$EN = 0\text{V}$			50	500		50	500	nA

**Note 1:** Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. Exposure to any Absolute Maximum Rating condition for extended periods may affect device reliability and lifetime. The voltage on all pins should not exceed  $3.8\text{V}$ ,  $V_{CC} + 0.3\text{V}$  or be less than  $-0.3\text{V}$ , otherwise damage to the ESD diodes may occur.

**Note 2:** Not production tested. Guaranteed by design and correlation to production tested parameters.

**Note 3:** The LTC5596IDD is guaranteed functional over the case temperature range  $-40^\circ\text{C}$  to  $105^\circ\text{C}$ . All limits at  $-40^\circ\text{C}$  and  $105^\circ\text{C}$  are guaranteed by design and production sample testing.

**Note 4:** The LTC5596HDD is guaranteed functional over the case temperature range  $-40^\circ\text{C}$  to  $125^\circ\text{C}$ . All limits at  $-40^\circ\text{C}$  and  $125^\circ\text{C}$  are guaranteed by 100% production testing.

**Note 5:** LOG-Linearity Error is the input-referred power measurement error relative to the best fit straight line ( $V_{OUT}$  vs pin in dBm) obtained by linear regression at  $T_C = 25^\circ\text{C}$ . The input power range used for the linear regression is from  $-32\text{dBm}$  to  $5\text{dBm}$  for  $50\text{MHz}$ , from  $-37\text{dBm}$  to  $-5\text{dBm}$  for  $100\text{MHz}$  through  $35\text{GHz}$ , from  $-34\text{dBm}$  to  $-5\text{dBm}$  for  $38\text{GHz}$ , from  $-32\text{dBm}$  to  $-5\text{dBm}$  for  $40\text{GHz}$  and from  $-28\text{dBm}$  to  $-5\text{dBm}$  for  $43.5\text{GHz}$ . An offset of  $0.5\text{dB}$  is added to the LOG-intercept for frequencies from

$50\text{MHz}$  to  $38\text{GHz}$ , and  $0.25\text{dB}$  is added for  $40\text{GHz}$  and  $43.5\text{GHz}$  to center the errors over the full temperature range. See also the Application Section for an explanation of measurement error metrics.

**Note 6:** Range for which the LOG-Linearity Error is within  $\pm 1\text{dB}$ .

**Note 7:** Slope of the best fit straight line obtained by linear regression.

**Note 8:** Extrapolated input power level (straight line obtained by linear regression) where the voltage at OUT equals  $0\text{V}$ .

**Note 9:** Power range for which LOG-Linearity Error is within  $\pm 1\text{dB}$ , relative to best fit straight line for CW data (see Note 5).

**Note 10:** Delay from 50% change in  $RF_{IN}$  to 50% change in output voltage.

**Note 11:** Time required to change voltage at OUT pin from 10% to 90% of final value. Input power stepped from  $-55\text{dBm}$  to  $0\text{dBm}$ .

**Note 12:** Time required to change voltage at OUT pin from 90% to 10% of initial value. Input power stepped from  $0\text{dBm}$  to  $-55\text{dBm}$ .


**Note 13:** Time required to change voltage at OUT pin to 90% of final value. Input power  $0\text{dBm}$ .

**Note 14:** Time required to change voltage at OUT pin to 10% of initial value. Input power  $0\text{dBm}$ . For higher load impedance the turn-off time will be (much) larger as the OUT interface is high impedance in shutdown mode.




**TYPICAL PERFORMANCE CHARACTERISTICS**  $V_{CC} = 3.3V$ ,  $EN = 3.3V$ ,  $T_C = 25^\circ C$ , CW input, 50Ω source at  $f_{RF} = 2140MHz$ , unless otherwise noted.

**Output Voltage, Linearity Error vs RF Input Power at 50MHz**

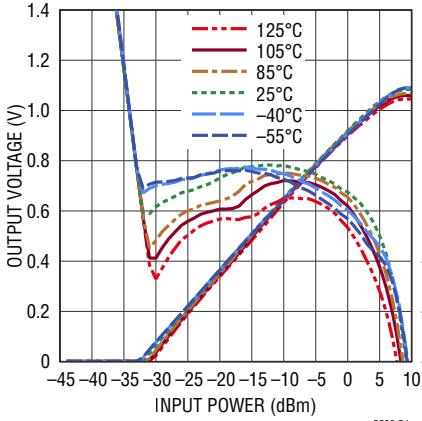


5596 G1

**Output Voltage, Linearity Error vs RF Input Power at 100MHz**

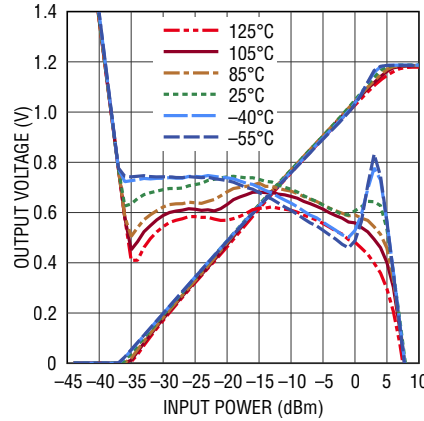


5596 G2

**Output Voltage, Linearity Error vs RF Input Power at 500MHz**

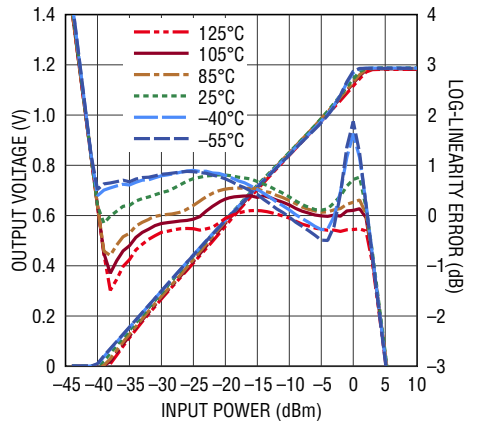


5596 G3

**Output Voltage, Linearity Error vs RF Input Power at 2.14GHz**

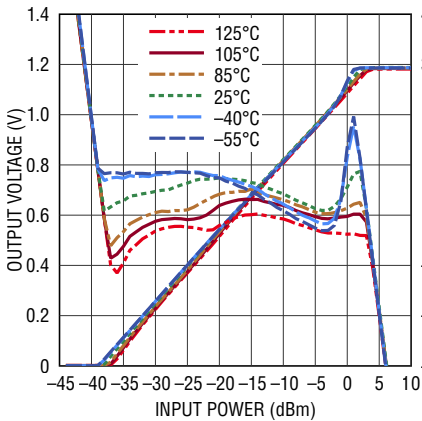


5596 G4

**Output Voltage, Linearity Error vs RF Input Power at 5.8GHz**

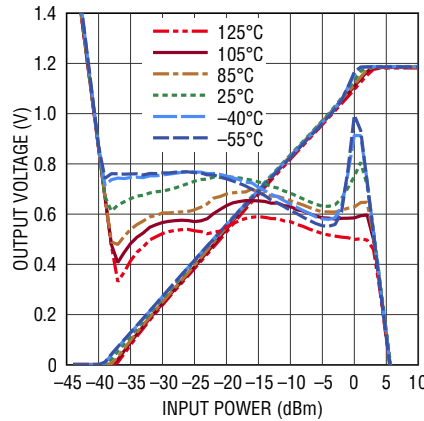


5596 G5

**Output Voltage, Linearity Error vs RF Input Power at 7.6GHz**

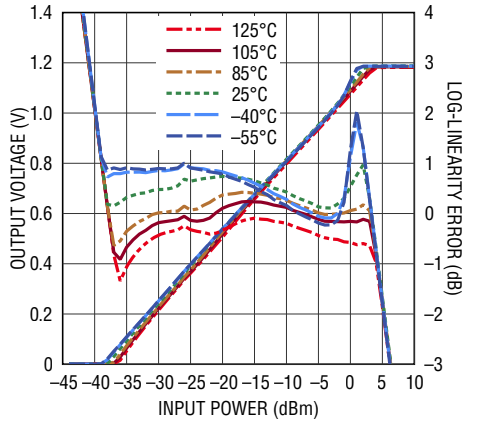


5596 G6

**Output Voltage, Linearity Error vs RF Input Power at 10GHz**

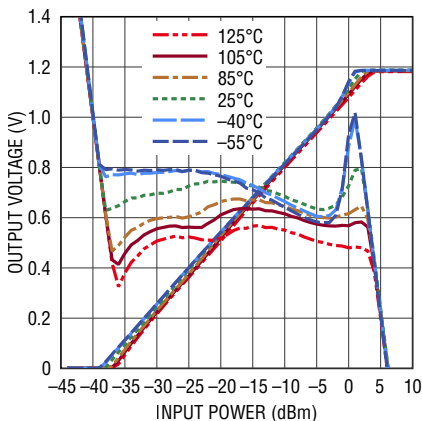


5596 G7

**Output Voltage, Linearity Error vs RF Input Power at 12GHz**

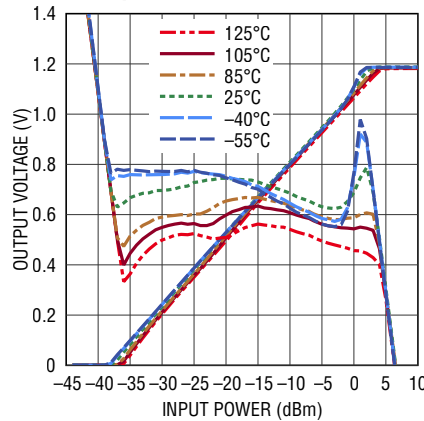

5596 G8

**Output Voltage, Linearity Error vs RF Input Power at 15GHz**

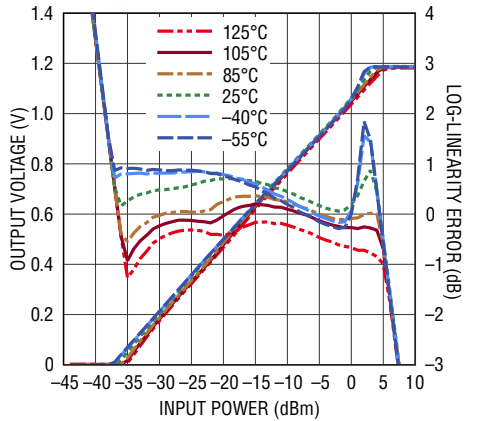


5596 G9

5596f


**TYPICAL PERFORMANCE CHARACTERISTICS**  $V_{CC} = 3.3V$ ,  $EN = 3.3V$ ,  $T_C = 25^\circ C$ , CW input,  $50\Omega$  source at  $f_{RF} = 2140MHz$ , unless otherwise noted.

**Output Voltage, Linearity Error vs RF Input Power at 18GHz**

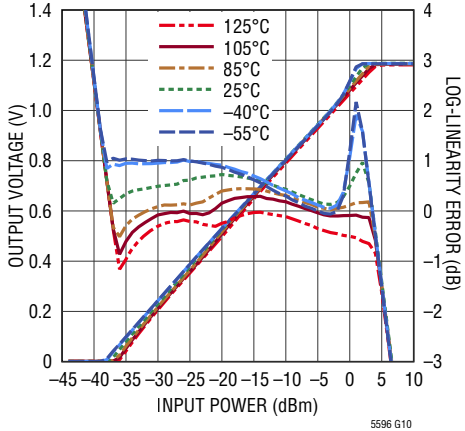


5596 G10

**Output Voltage, Linearity Error vs RF Input Power at 24GHz**

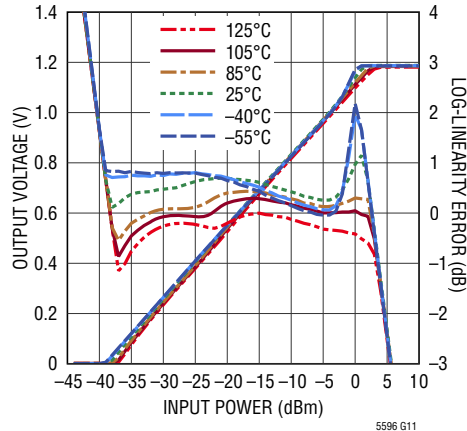


5596 G11

**Output Voltage, Linearity Error vs RF Input Power at 26GHz**

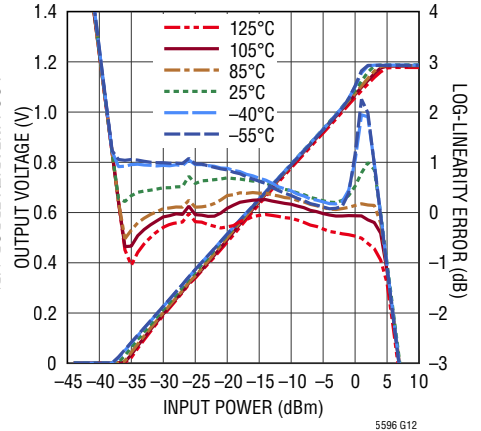


5596 G12

**Output Voltage, Linearity Error vs RF Input Power at 28GHz**

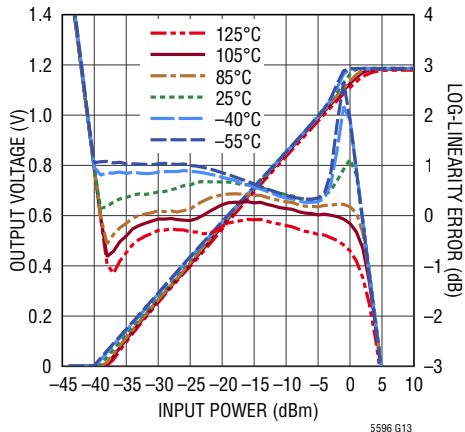


5596 G13

**Output Voltage, Linearity Error vs RF Input Power at 30GHz**

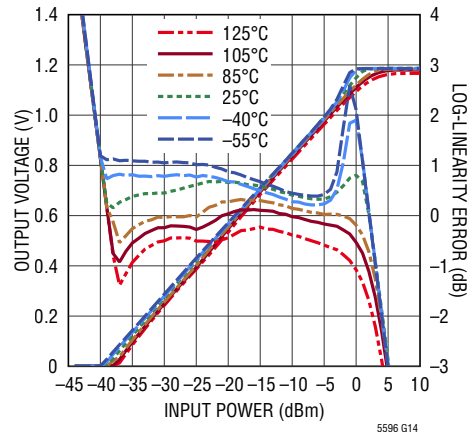


5596 G14

**Output Voltage, Linearity Error vs RF Input Power at 35GHz**

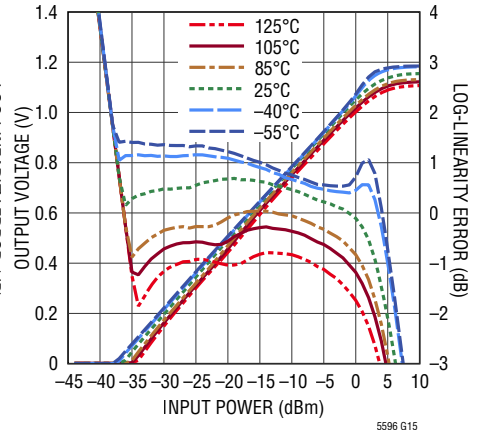


5596 G15

**Output Voltage, Linearity Error vs RF Input Power at 38GHz**

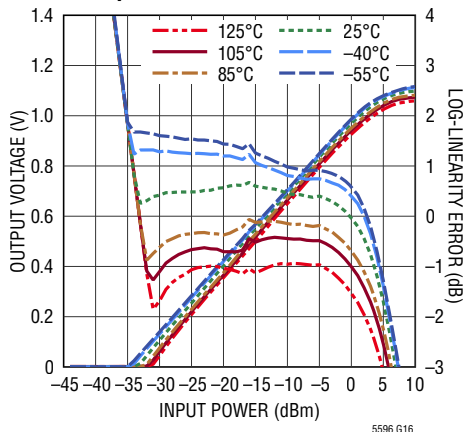


5596 G16

**Output Voltage, Linearity Error vs RF Input Power at 40GHz**

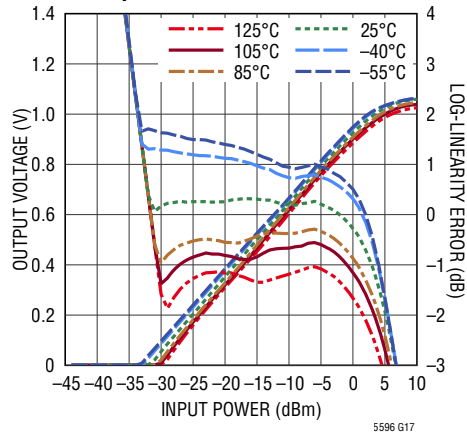

5596 G17


**Output Voltage, Linearity Error vs RF Input Power at 43.5GHz**

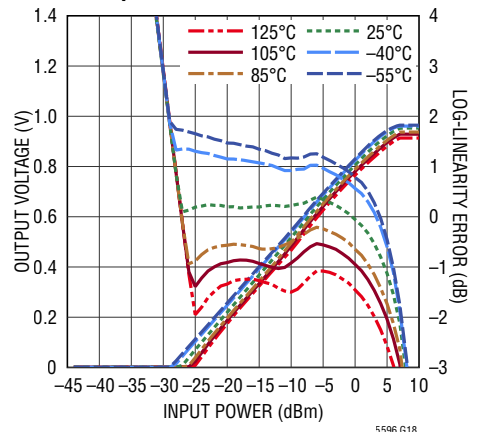

5596 G18


**TYPICAL PERFORMANCE CHARACTERISTICS**  $V_{CC} = 3.3V$ ,  $EN = 3.3V$ ,  $T_C = 25^\circ C$ , CW input, 50Ω source at  $f_{RF} = 2140MHz$ , unless otherwise noted.

**Linearity Error Temperature Variation from 25°C at 50MHz**

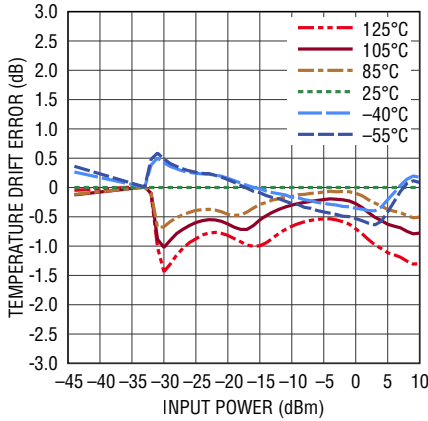


5596\_G19

**Linearity Error Temperature Variation from 25°C at 100MHz**

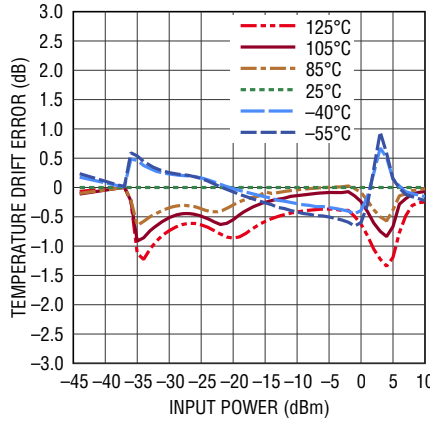


5596\_G20

**Linearity Error Temperature Variation from 25°C at 500MHz**

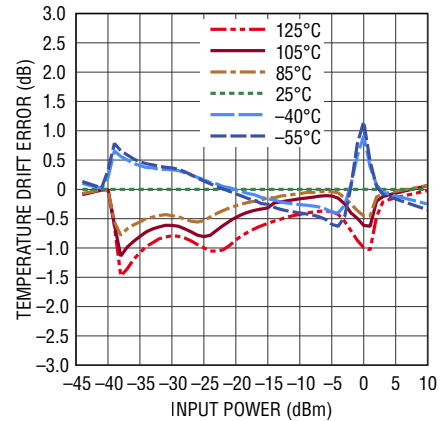


5596\_G21

**Linearity Error Temperature Variation from 25°C at 2.14GHz**

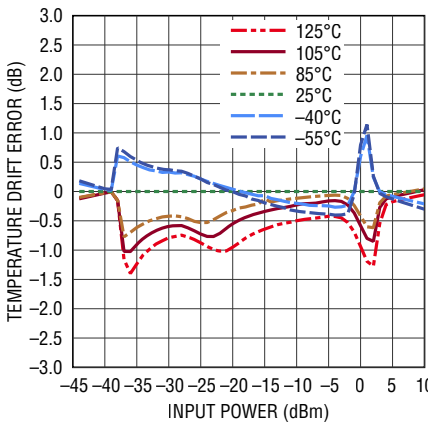


5596\_G22

**Linearity Error Temperature Variation from 25°C at 5.8GHz**

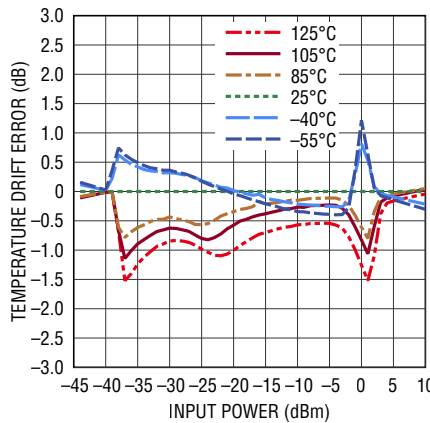


5596\_G23

**Linearity Error Temperature Variation from 25°C at 7.6GHz**

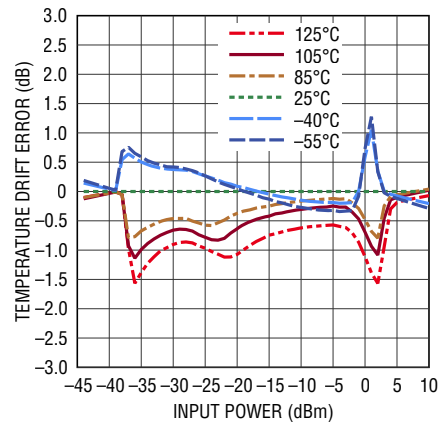


5596\_G24

**Linearity Error Temperature Variation from 25°C at 10GHz**

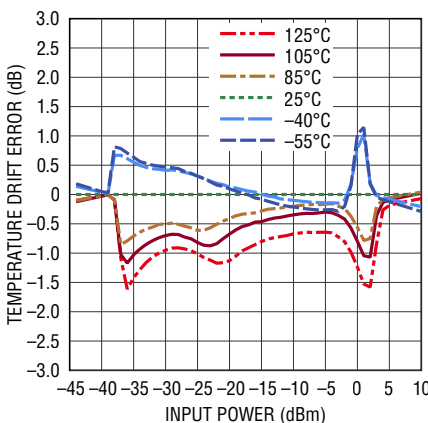


5596\_G25

**Linearity Error Temperature Variation from 25°C at 12GHz**

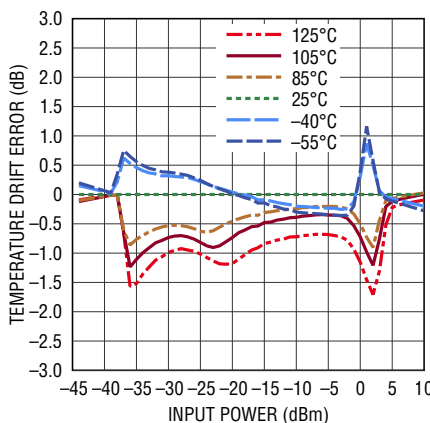

5596\_G26

**Linearity Error Temperature Variation from 25°C at 15GHz**

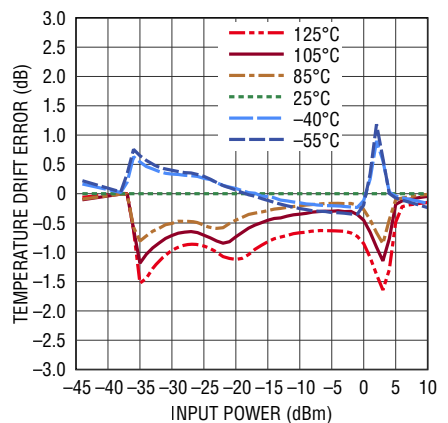


5596\_G27

**TYPICAL PERFORMANCE CHARACTERISTICS**

$V_{CC} = 3.3V$ ,  $EN = 3.3V$ ,  $T_C = 25^\circ C$ , CW input, 50Ω


source at  $f_{RF} = 2140MHz$ , unless otherwise noted.

**Linearity Error Temperature Variation from 25°C at 18GHz**

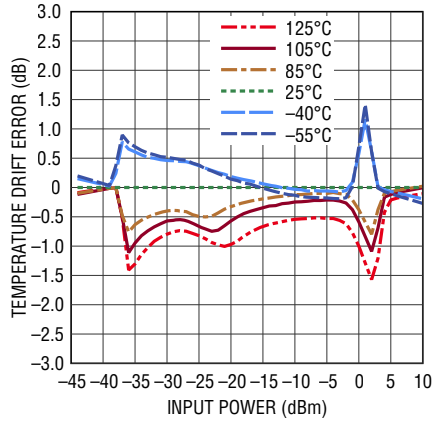


5596 G28

**Linearity Error Temperature Variation from 25°C at 24GHz**

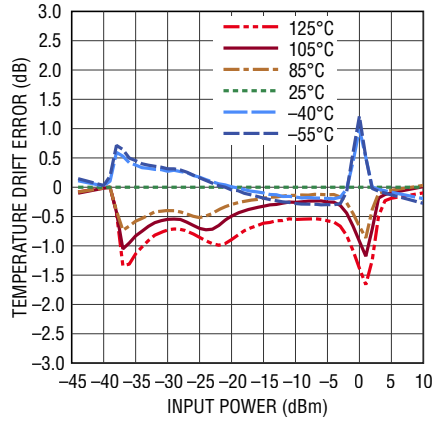


5596 G29

**Linearity Error Temperature Variation from 25°C at 26GHz**

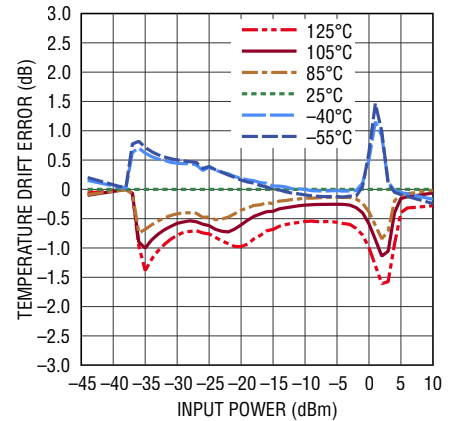


5596 G30

**Linearity Error Temperature Variation from 25°C at 28GHz**

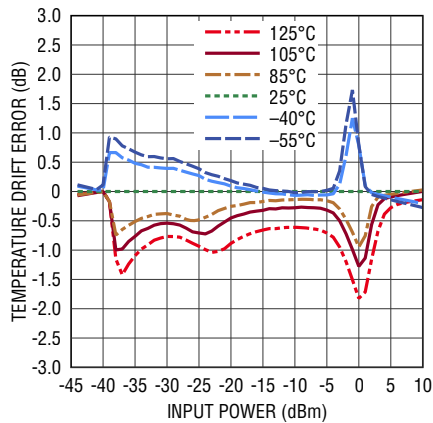


5596 G31

**Linearity Error Temperature Variation from 25°C at 30GHz**

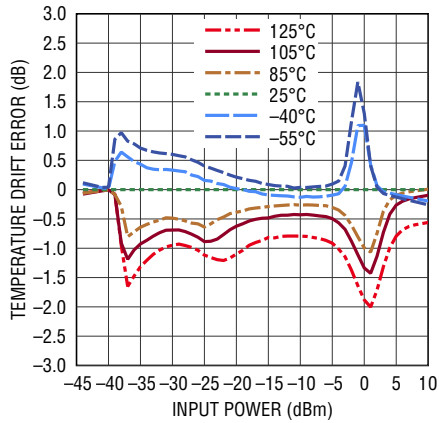


5596 G32

**Linearity Error Temperature Variation from 25°C at 35GHz**

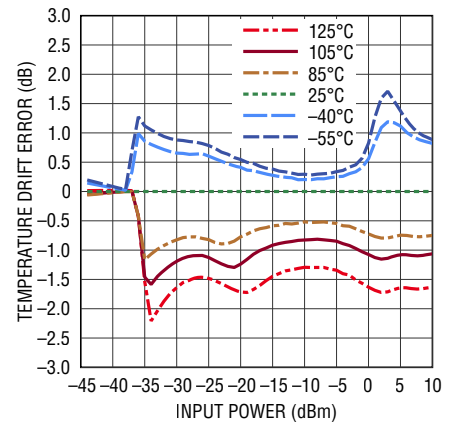


5596 G33

**Linearity Error Temperature Variation from 25°C at 38GHz**

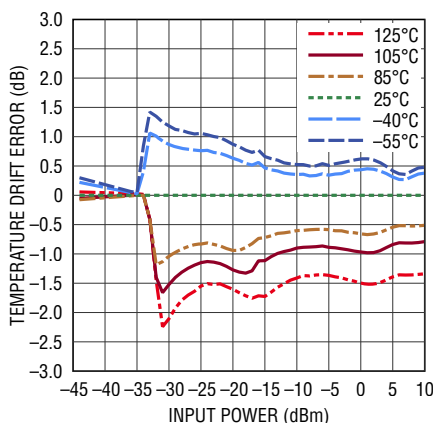


5596 34

**Linearity Error Temperature Variation from 25°C at 40GHz**

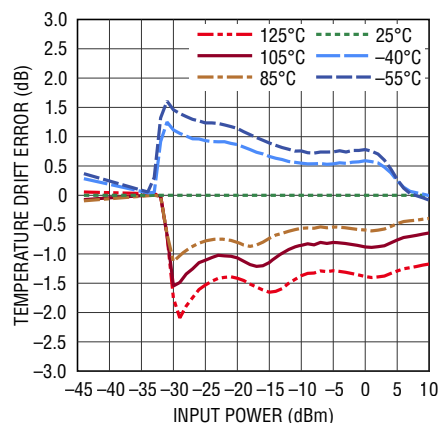

5596 G35


**Linearity Error Temperature Variation from 25°C at 43.5GHz**

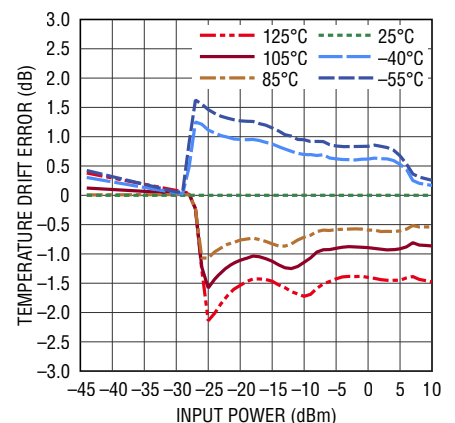


5596 G36

**TYPICAL PERFORMANCE CHARACTERISTICS**  $V_{CC} = 3.3V$ ,  $EN = 3.3V$ ,  $T_C = 25^\circ C$ , CW input, 50Ω source at  $f_{RF} = 2140MHz$ , unless otherwise noted.


**Output Voltage vs RF Input Power for Various Modulation Formats**

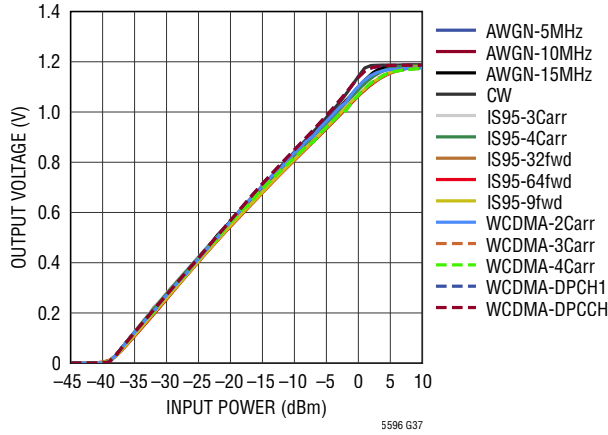


**Linearity Error vs RF Input Power for Various Modulation Formats, Regression Using CW Slope and Intercept Values**

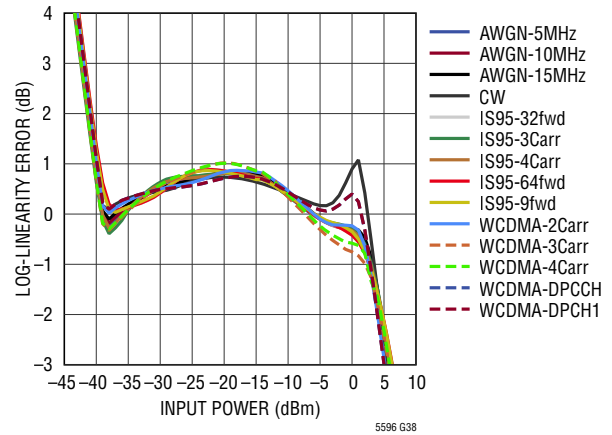


**Power Measurement Error Relative to CW for Various Modulation Formats**

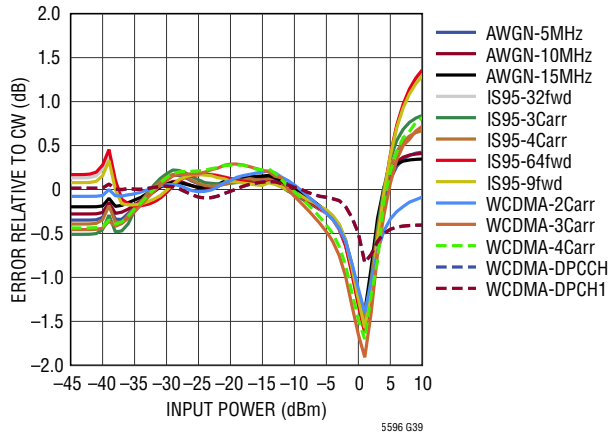


**Output Transient Response to RF Input Pulse**

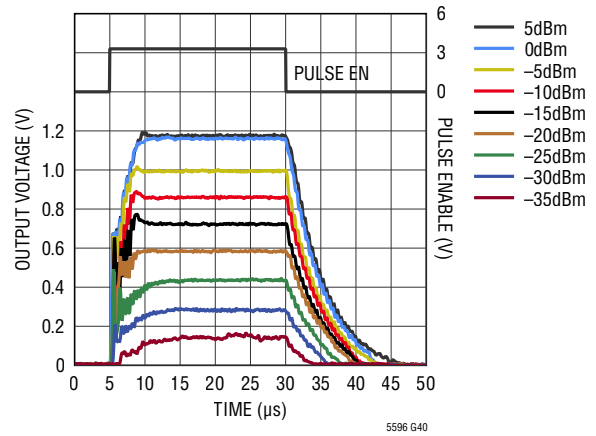


**Output Transient Response with CW RF and Enable Pulse**

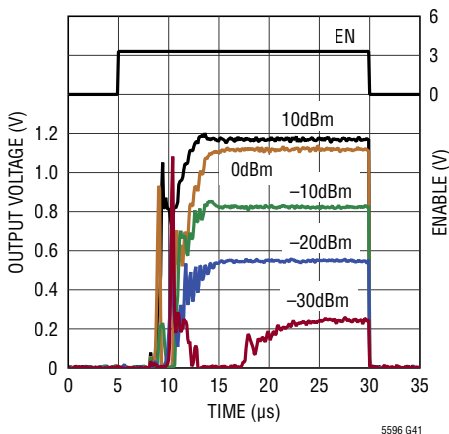

**Input Return Loss vs Frequency**

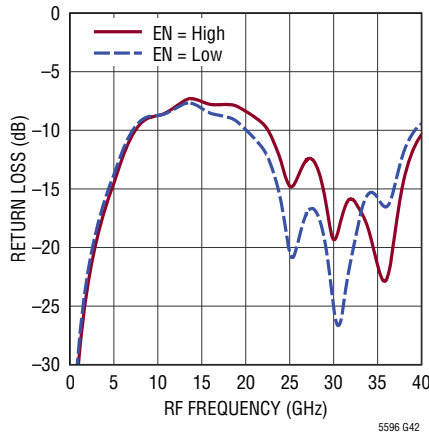

**Logarithmic Slope vs Frequency**

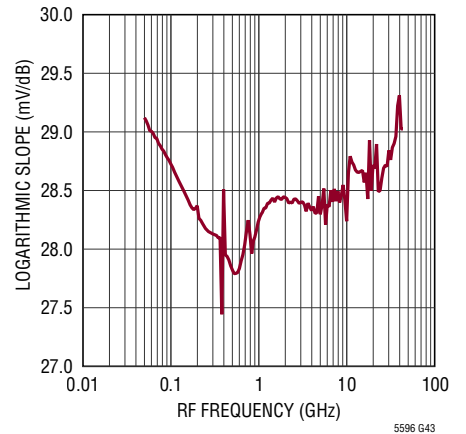


**TYPICAL PERFORMANCE CHARACTERISTICS**


$V_{CC} = 3.3V$ ,  $EN = 3.3V$ ,  $T_C = 25^\circ C$ , CW input,  $50\Omega$

source at  $f_{RF} = 2140MHz$ , unless otherwise noted.


**Logarithmic Intercept vs Frequency**

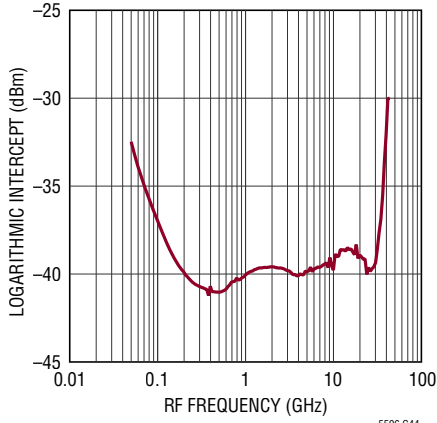


**Output Voltage vs Frequency**

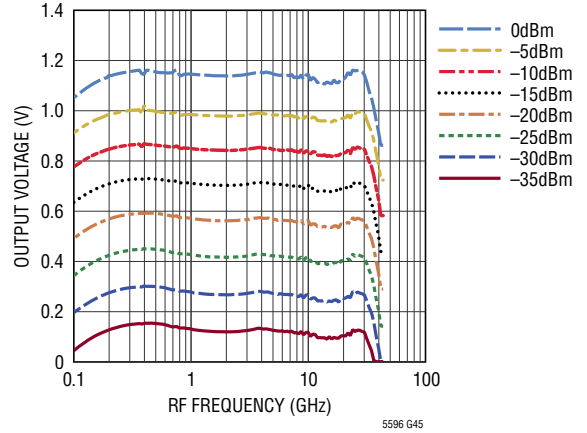


**Power Measurement Error vs Frequency, Relative to Response at 5.8GHz**

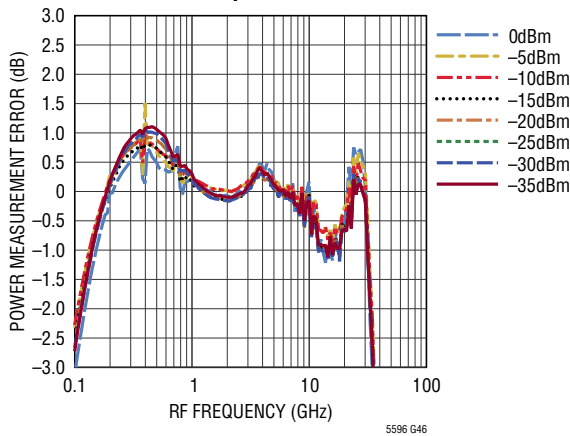


**Output Voltage vs RF Input Power**

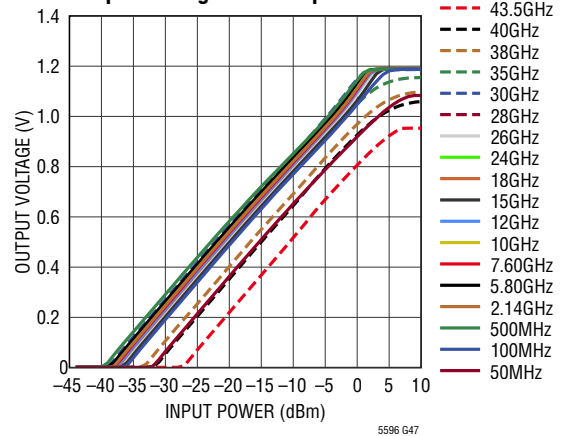


**Output Voltage vs Output Current (Positive=Sourcing, Negative=Sinking)**

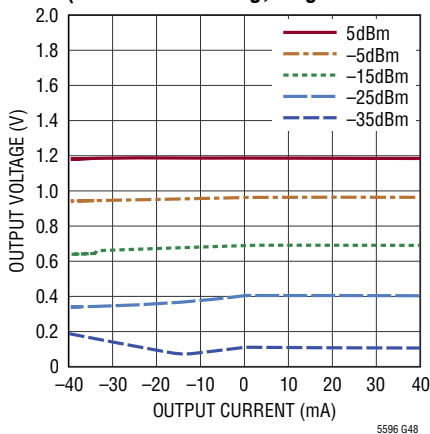

**Detector Error vs Output Load Current (Positive = Sourcing, Negative = Sinking)**

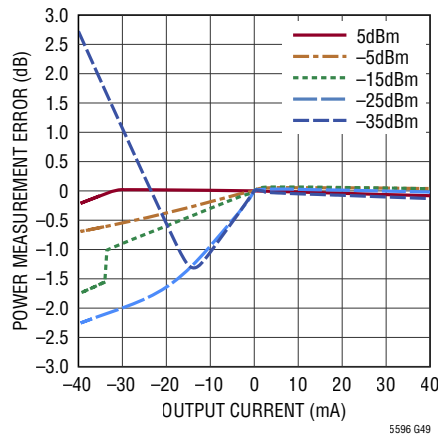

**Output Voltage vs Supply Voltage**

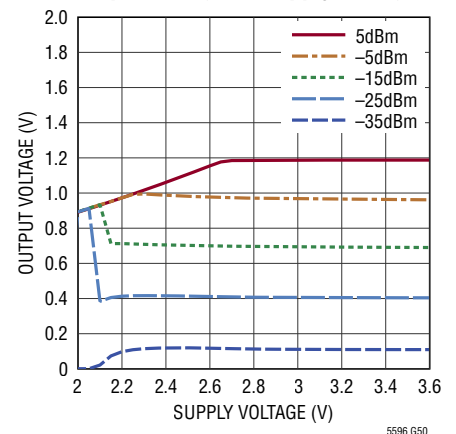


**TYPICAL PERFORMANCE CHARACTERISTICS**


$V_{CC} = 3.3V$ ,  $EN = 3.3V$ ,  $T_C = 25^\circ C$ , CW input, 50Ω

source at  $f_{RF} = 2140MHz$ , unless otherwise noted.


**Power Measurement Error vs Supply Voltage, Relative to 3.3V**

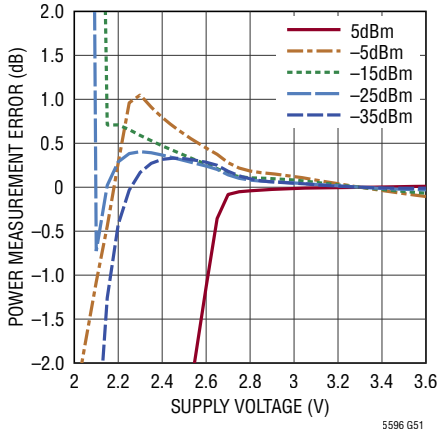


**Supply Current vs Supply Voltage**

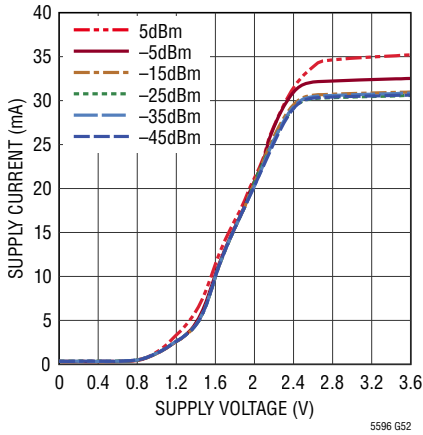


**Supply Current vs RF Input Power**

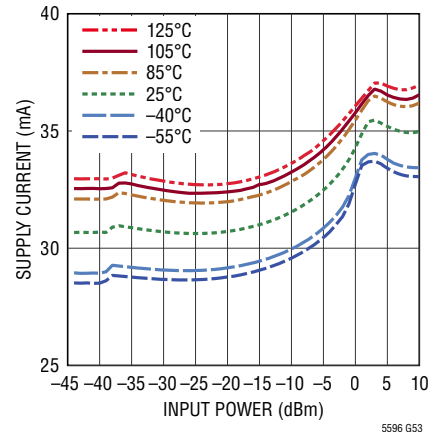


**Output Voltage at No RF Input Power Cumulative Distribution**

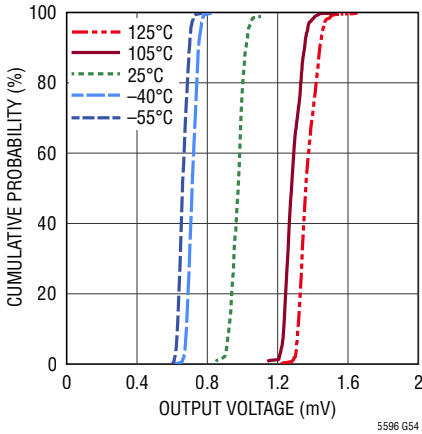


**Output Voltage at -35dBm Cumulative Distribution**

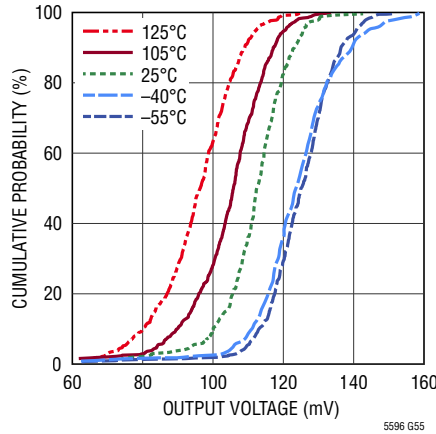


**Output Voltage at -30dBm Cumulative Distribution**

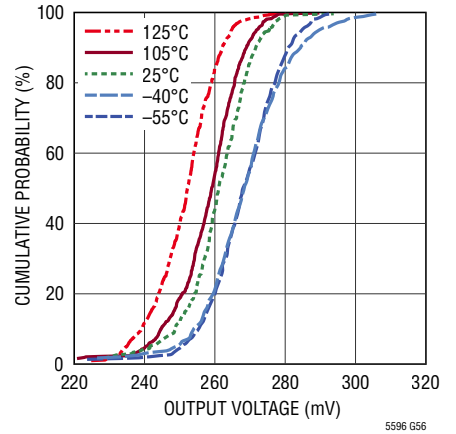


**Output Voltage at -25dBm Cumulative Distribution**

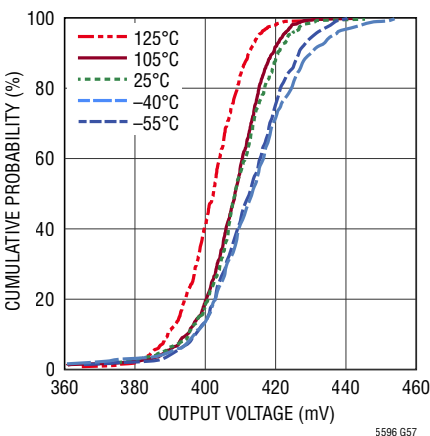

**Output Voltage at -20dBm Cumulative Distribution**

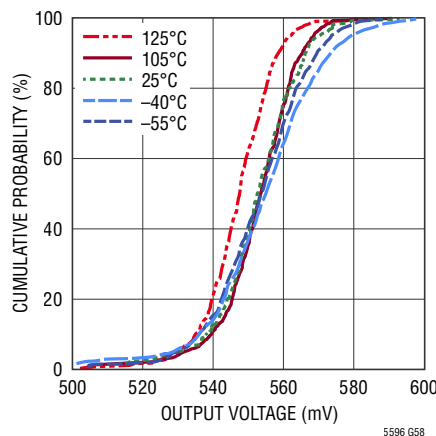

**Output Voltage at -15dBm Cumulative Distribution**

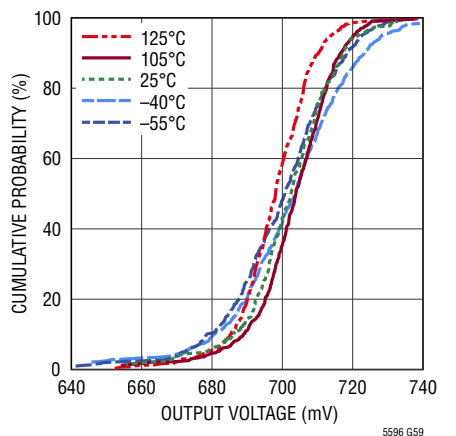


**TYPICAL PERFORMANCE CHARACTERISTICS**


$V_{CC} = 3.3V$ ,  $EN = 3.3V$ ,  $T_C = 25^\circ C$ , CW input,  $50\Omega$

source at  $f_{RF} = 2140MHz$ , unless otherwise noted.


**Output Voltage at -10dBm  
Cumulative Distribution**

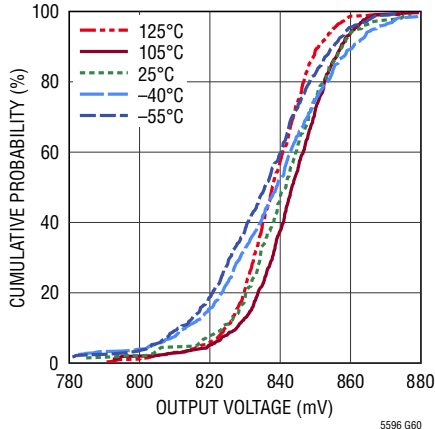


**Output Voltage at -5dBm  
Cumulative Distribution**

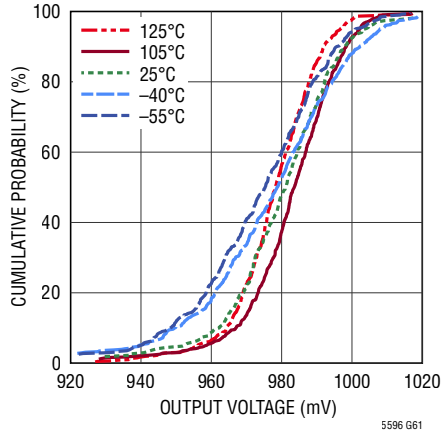


**Output Voltage at 0dBm  
Cumulative Distribution**

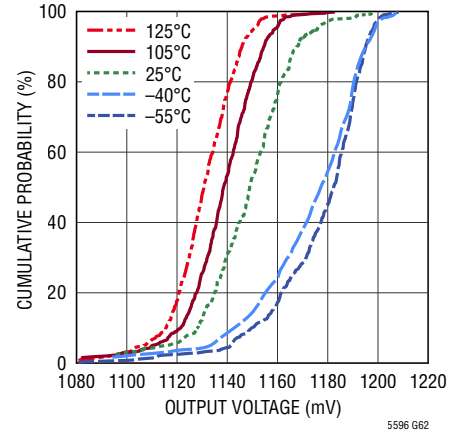


**Output Voltage at 5dBm  
Cumulative Distribution**

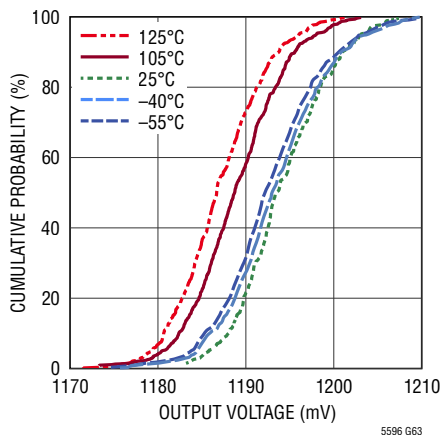


**Logarithmic Slope Cumulative  
Distribution**

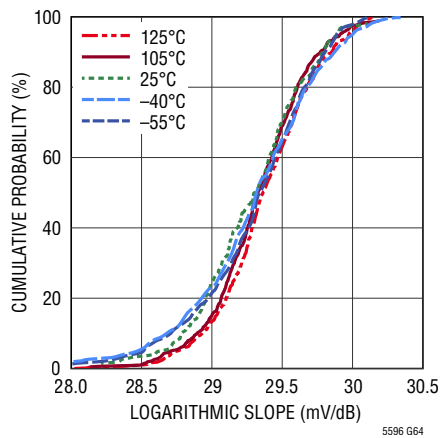

**Logarithmic Intercept Cumulative  
Distribution**

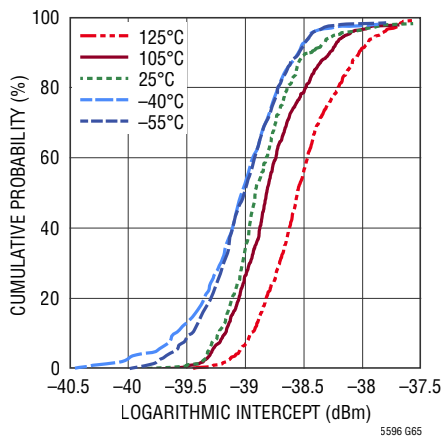

**Supply Current Cumulative  
Distribution**

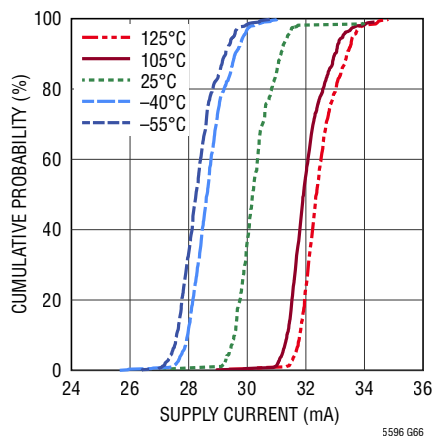



## PIN FUNCTIONS

**V<sub>CC</sub> (Pin 1):** Power Supply Pin. Typical current consumption is 30mA at room temperature. This pin should be externally bypassed with a 100nF capacitor.

**OUT (Pin 2):** Detector Output. The DC voltage at this pin varies linearly with the RF input power level in dBm. This output is able to drive a 50Ω load. To avoid permanent damage, do not short to V<sub>CC</sub> or GND. In shutdown mode (EN = Low), this interface become high impedance, to avoid discharge of capacitors in an external ripple filter.


**FLTR (Pin 3):** An optional capacitor connected between FLTR and OUT (Pin 2) reduces the detector ripple averaging bandwidth. This will also increase the rise and fall times of the detector. To avoid permanent damage to the circuit, the DC voltage at this pin should not exceed 0.4V.

**GND (Pins 4, 5, 7, Exposed Pad Pin 9):** Circuit Ground. All ground pins are internally connected together. Pins 5 and 7 should be used as RF return ground and connected to the transmission line interfacing to RF<sub>IN</sub> (pin 6).

**RF<sub>IN</sub> (Pin 6):** RF Input. This pin is internally DC-coupled to GND through a 50Ω termination resistor. To avoid damage to the internal circuit, the DC voltage applied to this pin should not exceed 1V. The ground-signal-ground arrangement of pins 5 through 7 support termination of pin 6 by a high frequency transmission line, such as a grounded co-planar waveguide (GCPW). No external decoupling capacitor is necessary as long as the DC voltage on pin 6 is kept below 1V.

**EN (Pin 8):** Chip Enable. A voltage above 1.1V applied to this pin will bring the device into normal operating mode. A voltage below 0.6V will bring the device into a low power shutdown mode. Do not float this pin.

# TEST CIRCUIT

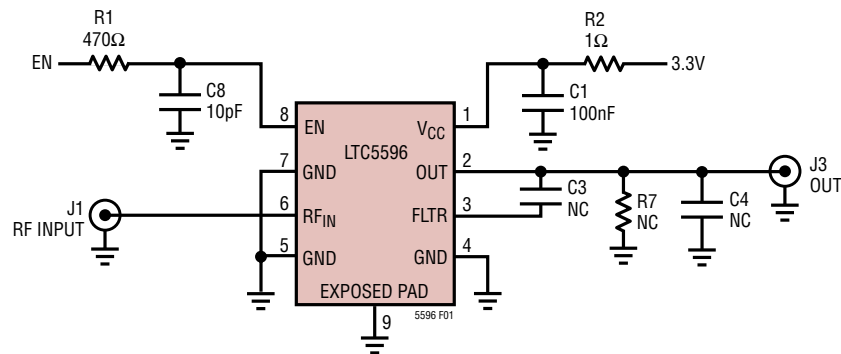

REF DES	VALUE	SIZE	PART NUMBER
C1	100nF	0402	AVX GX02YD104KAT2, 40GHz
C3, C4	NC	0402	
C8	10pF	0402	MURATA GRM155C1H100JA01D
R1	470Ω	0402	VISHAY CRCW0402470RFKED
R2	1Ω	0402	VISHAY CRCW04021R00FNED
R7	NC	0402	
J1	2.9mm JACK TO EDGE-LAUNCH, DC-40GHz		SRI CONNECTOR, 25-146-1000-93, or SOUTHWEST 1092-03A-5
J3	SMA 50Ω EDGE-LAUNCH		E.F. JOHNSON, 142-0701-851

Figure 1. Test Schematic Optimized for 100MHz to 40 GHz

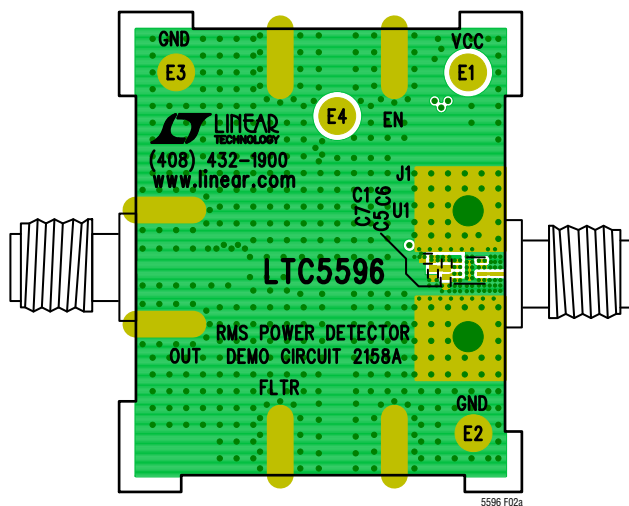


Figure 2a. Top Side of Evaluation Board

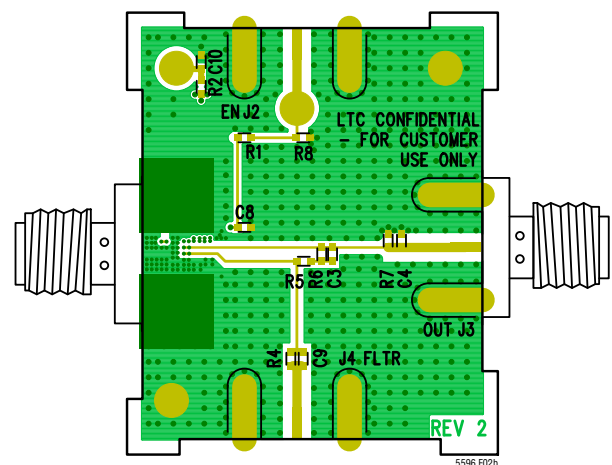


Figure 2b. Bottom Side of Evaluation Board

## APPLICATIONS INFORMATION

The LTC5596 is a true RMS RF power detector, capable of measuring an RF signal over the frequency range from 100MHz to 40GHz, independent of input waveforms with different crest factors such as CW, WCDMA, OFDM (LTE and WiFi) signals. Up to 35dB dynamic range is achieved with a very stable output within the full case temperature range.

### RF Input

The single-ended RF input is internally matched to  $50\Omega$ , both in active mode and the low power shutdown mode. The DC voltage applied to this pin should be kept below 1V, to avoid damage to the internal circuitry, depicted in Figure 3.

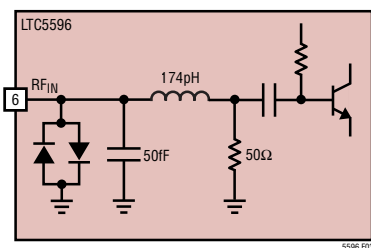


Figure 3. Simplified Schematic of the RF<sub>IN</sub> Interface

Together with GND Pin 5 and Pin 7, RF<sub>IN</sub> (Pin 6) forms a ground-signal-ground configuration that can interface directly with a co-planar waveguide on the PCB. The recommended design is depicted in Figure 4.

To minimize reflections at high frequencies, the center strip has been chosen the same width as the RF<sub>IN</sub> package pin (10mils). Likewise, the center pin of the 40GHz 2.92mm connector terminating the other side of the GCPW has a 10mils width as well.

The LTC5596 evaluation board uses a 5mils thick layer of Rogers RO3003 material for the top substrate to achieve low dielectric losses up to 40GHz. The other two substrates on the board are regular FR-4 material. Using this configuration, a  $50\Omega$  characteristic impedance is obtained for a 9mils gap width between the center strip and the two ground return conductors. Via's, connecting the top ground conductors with the second metal ground plane, should be placed along the edge of the GCPW top ground conductors. Via dimensions should be kept as small as

possible; the evaluation board uses vias with a diameter of 6mils; 8mils including the metal edge ring (donut).

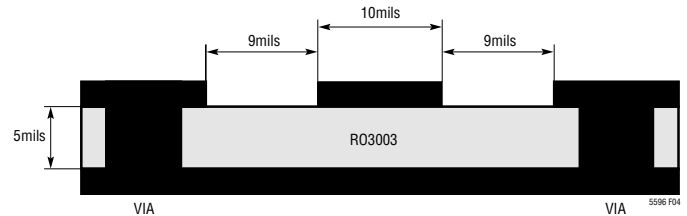


Figure 4. Grounded Co-Planar Waveguide (GCPW) to Interface RF<sub>IN</sub>

### FLTR Interface (Pin 3):

This pin enables additional suppression of high frequency ripple in the detector output signal, at the expense of a slower detector response (longer rise time, fall time and propagation delay). As depicted in Figure 1, an external capacitor C3 connected between FLTR and OUT enlarges the amount of feedback capacitance across the output amplifier, and reduces the output filter bandwidth without affecting the current drive capability of the LTC5596. Suitable capacitance values are in the range from 10pF up to 1nF, but the total of feedback and load capacitance (from OUT to signal ground) should not exceed 1nF. Larger capacitance values may result in instability of the output driver.

To avoid permanent damage to the chip, the DC voltage at the FLTR pin should not exceed 0.4V. Similarly, it is not recommended to supply a DC bias current to this pin in excess of about 100 $\mu$ A.

### OUT Interface (Pin 2):

The OUT interface, depicted in Figure 5, is a class-AB CMOS output stage that can source and sink over 20mA of load current.

It is able to drive a load resistance of  $50\Omega$  (or higher) over the full output voltage range. Short-circuiting the OUT interface should be avoided though, as this can lead to permanent damage of the device. The output driver is stable for capacitive loads up to at least 1nF. This includes any external feedback capacitance between OUT and FLTR, which is essentially experienced as a load by the driver amplifier.

5596f

## APPLICATIONS INFORMATION

Additional ripple filtering using larger capacitances can be achieved by connecting a series-RC low pass filter to OUT. This however reduces the current drive capability of the output signal, since the filter resistor is placed in series with OUT.

In general, the rise time of the LTC5596 is much shorter than the fall time. An external feedback capacitor between FLTR and OUT increases both rise and fall time, while an RC filter connected in series with OUT will primarily increase the rise time (as long as the time constant is smaller than the fall time).




Figure 5. Simplified Schematic of the OUT Interface

The OUT interface becomes high impedance when the device is put into shutdown mode (EN = Low). This prevents discharge of capacitors in a ripple filter connected to the OUT interface. The fall time of the voltage at the OUT interface when the device is turned off (high to low transition of EN) is therefore dependent on the load impedance. Figure 6 shows the output voltage transient when the device is turned off for a 1M $\Omega$  load impedance and a 50 $\Omega$  load impedance.

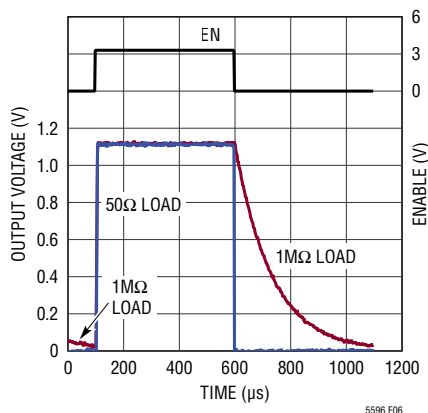


Figure 6. Output Voltage Turn-Off Transient for 1M $\Omega$ ||11pF and 50 $\Omega$  Load Impedance. Input Power 0dBm, Input Frequency 2140MHz.

### Enable Interface (Pin 8)

A simplified schematic of the EN Pin interface is shown in Figure 7. The CMOS logic brings the device in its active operating mode for input voltages above 1.1V, input voltages below 0.6V. bring it into a low power shutdown mode. The voltage applied to the EN pin should never exceed V<sub>CC</sub> by more than 0.3V., and never decrease below GND by 0.3V. Otherwise, permanent damage to the ESD diodes may occur. Placing an external resistor of at least several hundred  $\Omega$  in series with the EN interface is an effective way to avoid such damage, that limits the current flowing through the ESD diodes (see Figure 1).

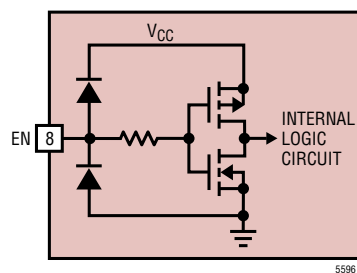


Figure 7. Simplified Schematic of the EN Interface

### Supply Voltage Ramping

Fast ramping of the supply voltage can cause a current glitch in the internal ESD protection circuits. Depending on the supply inductance, this could result in a supply voltage overshooting at the initial transient that exceeds the maximum rating. A supply voltage ramp time of greater than 1ms is recommended. In case this voltage ramp time is not controllable, a small series resistor should be inserted in between V<sub>CC</sub> Pin and the supply voltage source to mitigate the problem and self protect the IC. The 1 $\Omega$  resistor R2 and capacitor C1 shown in Figure 1 serve this purpose.

## APPLICATIONS INFORMATION

### High Accuracy Power Measurement

The power measurement accuracy achieved using a power detector is not only determined by the performance of the power detector device itself, but also by the approach/methods used to interpret the DC power detector output signal. This can be understood by considering Figure 8.

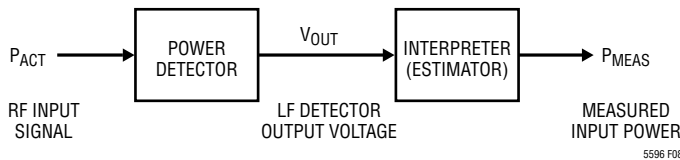


Figure 8. Power Measurement Concept

Systems for accurate power level measurements on RF signals can conceptually be thought to consist of two elements:

- A high accuracy power detector (like the LTC5596), converting the power level of an RF signal into a DC voltage or current;
- An interpreter (also called an estimator), translating the DC output voltage or current of the power detector back to a power level.

In Figure 8,  $P_{MEAS}$  represents the power level measured by the system, i.e. the power level the system thinks is present at its input, while  $P_{ACT}$  represents the actual power level present at the detector input. The power measurement error thus equals the difference:  $P_{ERR} = P_{MEAS} - P_{ACT}$ .

The more the interpreter knows about the operating conditions and transfer of the detector, the smaller the measurement error that can be achieved. For example, the interpreter may assume that the detector response is perfectly linear in dB, such that the relationship between input power and output voltage is a straight line:

$$V_{OUT} = SLOPE \cdot (P_{MEAS} - P_{INTERCEPT})$$

This results in a power measurement error equal to:

$$LOG\text{-Linearity Error} = V_{OUT}/SLOPE + P_{INTERCEPT} - P_{ACT}$$

The parameters SLOPE and  $P_{INTERCEPT}$ , the LOG-slope and LOG-intercept, are best obtained from the actual detector

response using linear regression over a suitable power range (where the detector response is close to linear). Better accuracy/smaller errors are obtained if SLOPE and  $P_{INTERCEPT}$  are determined for:

- Each detector device individually
- Each operating temperature
- Each operating frequency

To achieve the best accuracy, it is recommended to determine SLOPE and  $P_{INTERCEPT}$  for each individual unit, requiring a 2-point factory calibration. When temperature drift effects are to be included, SLOPE and  $P_{INTERCEPT}$  need to be determined at different operating temperatures and the system needs to incorporate a temperature sensor to determine which parameter values to use for the current operating temperature.

The LOG-linearity error curves in the Typical Performance Characteristics section were obtained using linear regression, applied to the response of the individual detector devices at  $T = 25^{\circ}\text{C}$ . For frequencies up to 28GHz, the input power range from  $-37\text{dBm}$  to  $-5\text{dBm}$  was used. The resulting LOG-linearity error tends to have larger negative values than positive values. To center the error curves within the  $\pm 1\text{dB}$  range, an additional 0.5dB was added to the  $P_{INTERCEPT}$  parameter. This slightly increases the measurement error at  $T = 25^{\circ}\text{C}$ , but results in a smaller error over the full temperature range. The calculated LOG-slope and LOG-intercept numbers are displayed in the tables on page 3 and 4.

A better measurement accuracy is achieved if the interpreter uses the actual detector response at  $T = 25^{\circ}\text{C}$  as model for the detector, instead of the perfect linear-in-dB response described above. The resulting measurement error, the temperature drift error, equals:


$$\text{Temperature Drift Error} = [V_{OUT}(T) - V_{OUT}(25^{\circ}\text{C})]/SLOPE$$

A system that achieves this measurement error should store the full output voltage vs input power response of the detector with suitable resolution. The error curves displayed on page 10 and 11 represent the achieved power measurement accuracy using this configuration.


# PACKAGE DESCRIPTION

Please refer to <http://www.linear.com/product/LTC5596#packaging> for the most recent package drawings.

## DC Package 8-Lead Plastic DFN (2mm × 2mm), Flip Chip (Reference LTC DWG # 05-08-1957 Rev A)

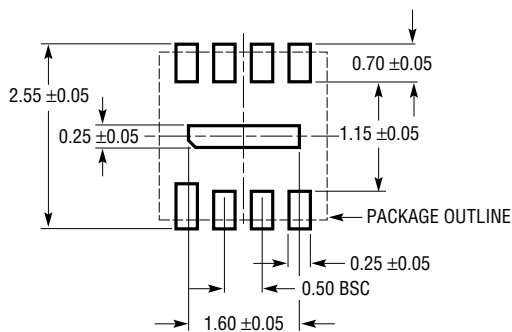


RECOMMENDED SOLDER PAD PITCH AND DIMENSIONS  
APPLY SOLDER MASK TO AREAS THAT ARE NOT SOLDERED

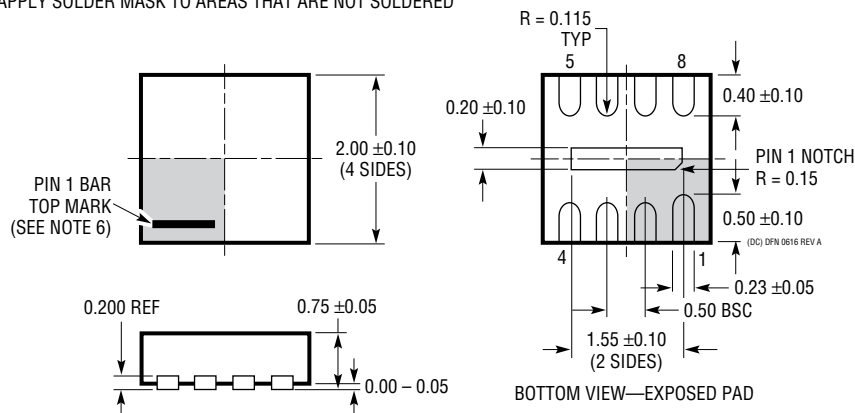

- NOTE:
1. DRAWING IS NOT A JEDEC PACKAGE OUTLINE
  2. DRAWING NOT TO SCALE
  3. ALL DIMENSIONS ARE IN MILLIMETERS
  4. DIMENSIONS OF EXPOSED PAD ON BOTTOM OF PACKAGE DO NOT INCLUDE MOLD FLASH. MOLD FLASH, IF PRESENT, SHALL NOT EXCEED 0.15mm ON ANY SIDE
  5. EXPOSED PAD SHALL BE SOLDER PLATED
  6. SHADED AREA IS ONLY A REFERENCE FOR PIN 1 LOCATION ON THE TOP AND BOTTOM OF PACKAGE

## TYPICAL APPLICATION

## 100MHz to 40GHz Power Measurement

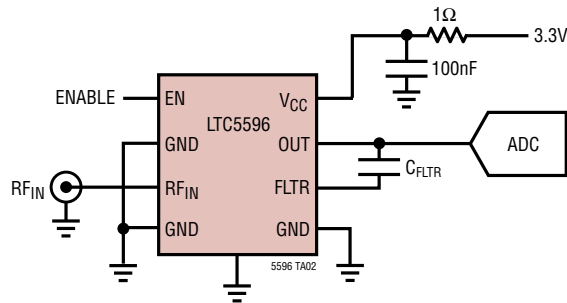

## RELATED PARTS

PART NUMBER	DESCRIPTION	COMMENTS
<b>RF Power Detectors</b>		
<a href="#">LTC5564</a>	600MHz to 15GHz Ultra-Fast Response Schottky Peak Detector with Fast Comparator	7ns Detector Response, 9ns Comparator Response, 75MHz Demodulation Bandwidth Envelope Detection
<a href="#">LT5581</a>	10MHz to 6GHz RMS Power Detector	40dB Dynamic Range $\pm 1$ dB Linearity and Accuracy Over Temperature, Log Linear Response, 1.4mA at 3.3V
<a href="#">LTC5587</a>	10MHz to 6GHz RMS Power Detector with Digital Output	40dB Dynamic Range $\pm 1$ dB Linearity and Accuracy Over Temperature, On-Chip 12-Bit ADC, 3mA Supply Current
<a href="#">LTC5582</a>	40MHz to 10GHz RMS Power Detector	57dB Dynamic Range at 2GHz, $\pm 0.5$ dB Accuracy Over Temperature, Excellent Linearity Error
<a href="#">LTC5583</a>	Dual 40MHz to 6GHz RMS Power Detector with Difference VSWR Output and Envelope Detector Output	60dB Dynamic Range at 2GHz, $\pm 0.5$ dB Accuracy Over Temperature, 40dB Ch-Ch Isolation
<b>Infrastructure</b>		
<a href="#">LTC5548</a>	2GHz to 14GHz Microwave Mixer with Wideband DC-6GHz IF	IIP3 = 24.4dBm, 8dB Conversion Loss, < 10dB NF, 3.3V, 120mA Supply Operation
<a href="#">LTC5549</a>	2GHz to 14GHz Microwave Mixer with Integrated LO Frequency Doubler	28.2dBm IIP3, 8dB Conversion Loss, 0dBm LO Drive, Up- and Down-Conversion