



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





# **LED Display**

## **Product Data Sheet**

### **LTS-50801G**

Spec No.: DS-30-98-249

Effective Date: 04/21/2000

Revision: -

**LITE-ON DCC**

**RELEASE**

**BNS-OD-FC001/A4**

**LITE-ON Technology Corp. / Optoelectronics**

No.90,Chien 1 Road, Chung Ho, New Taipei City 23585, Taiwan, R.O.C.

Tel: 886-2-2222-6181 Fax: 886-2-2221-1948 / 886-2-2221-0660

<http://www.liteon.com/opto>

**FEATURES**


- \* 5-INCH (127.0-mm) DIGIT HEIGHT.
- \* CONTINUOUS UNIFORM SEGMENTS.
- \* LOW POWER REQUIREMENT.
- \* EXCELLENT CHARACTERS APPEARANCE.
- \* HIGH BRIGHTNESS & HIGH CONTRAST.
- \* WIDE VIEWING ANGLE.
- \* SOLID STATE RELIABILITY.
- \* CATEGORIZED FOR LUMINOUS INTENSITY.

**DESCRIPTION**


The LTS-50801G is a 5-inch (127.0-mm) digit height single digit seven-segment display. This device utilizes green LED chips, which are made from GaP on GaP substrate, and has a black face and green segments.

**DEVICE**

| PART NO.   | DESCRIPTION  |
|------------|--------------|
| GREEN      | Common Anode |
| LTS-50801G |              |

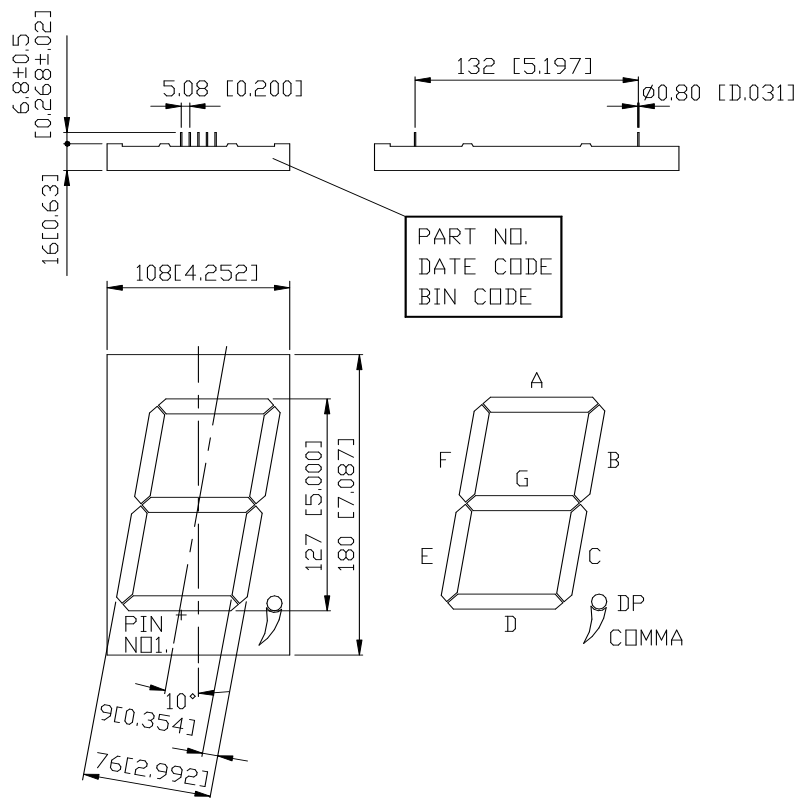**PACKAGE DIMENSIONS**


NOTES: All dimensions are in millimeters. Tolerance is  $\pm 0.25$ -mm (0.01") unless otherwise noted.

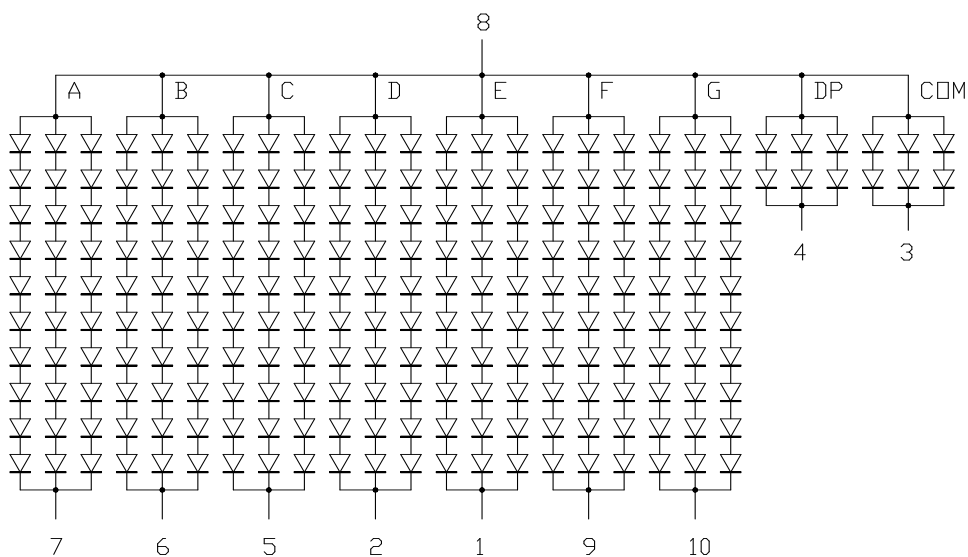**INTERNAL CIRCUIT DIAGRAM**


**PIN CONNECTION**

| <b>No.</b> | <b>CONNECTION</b> |
|------------|-------------------|
| 1          | SEGMENT E CATHODE |
| 2          | SEGMENT D CATHODE |
| 3          | COMMA CATHODE     |
| 4          | D.P. CATHODE      |
| 5          | SEGMENT C CATHODE |
| 6          | SEGMENT B CATHODE |
| 7          | SEGMENT A CATHODE |
| 8          | COMMON ANODE      |
| 9          | SEGMENT F CATHODE |
| 10         | SEGMENT G CATHODE |

**ABSOLUTE MAXIMUM RATING AT Ta=25°C**

| PARAMETER  | MAXIMUM RATING                           | UNIT               |
|--|--|--------------------|
| Power Dissipation Per Segment  | 1200                                     | mW                 |
| Peak Forward Current Per Segment<br>( 1/10 Duty Cycle, 0.1ms Pulse Width )           | 180                                      | mA                 |
| Continuous Forward Current Per Segment   | 60                                       | mA                 |
| Derating Linear From 25 <sup>0</sup> C Per Segment                                   | 0.72                                     | mA/ <sup>0</sup> C |
| Reverse Voltage Per Segment  | 50                                       | V                  |
| Operating Temperature Range  | -35 <sup>0</sup> C to +85 <sup>0</sup> C |                    |
| Storage Temperature Range  | -35 <sup>0</sup> C to +85 <sup>0</sup> C |                    |
| Solder Temperature 1/16 inch Below Seating Plane for 3 Seconds at 260 <sup>0</sup> C |  |                    |

**ELECTRICAL / OPTICAL CHARACTERISTICS AT Ta=25°C**

| PARAMETER                         | SYMBOL            | MIN. | TYP.        | MAX.        | UNIT | TEST CONDITION       |
|-----------------------------------|-------------------|------|-------------|-------------|------|----------------------|
| Average Luminous Intensity        | I <sub>v</sub>    | 21   | 60          |             | mcd  | I <sub>F</sub> =30mA |
| Peak Emission Wavelength          | λ <sub>p</sub>    |      | 565         |             | nm   | I <sub>F</sub> =20mA |
| Spectral Line Half-Width          | Δλ                |      | 30          |             | nm   | I <sub>F</sub> =20mA |
| Dominant Wavelength               | λ <sub>d</sub>    |      | 569         |             | nm   | I <sub>F</sub> =20mA |
| Forward Voltage Per Segment       | V <sub>F</sub>    |      | 21<br>(4.2) | 26<br>(5.2) | V    | I <sub>F</sub> =60mA |
| Reverse Current Per Segment       | I <sub>R</sub>    |      |             | 300         | μA   | V <sub>R</sub> =50V  |
| Luminous Intensity Matching Ratio | I <sub>v</sub> -m |      |             | 2:1         |      | I <sub>F</sub> =10mA |

Note: Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (Commision internationale DE L'Eclairage) eye-response curve.

**TYPICAL ELECTRICAL / OPTICAL CHARACTERISTIC CURVES**

(25°C Ambient Temperature Unless Otherwise Noted)

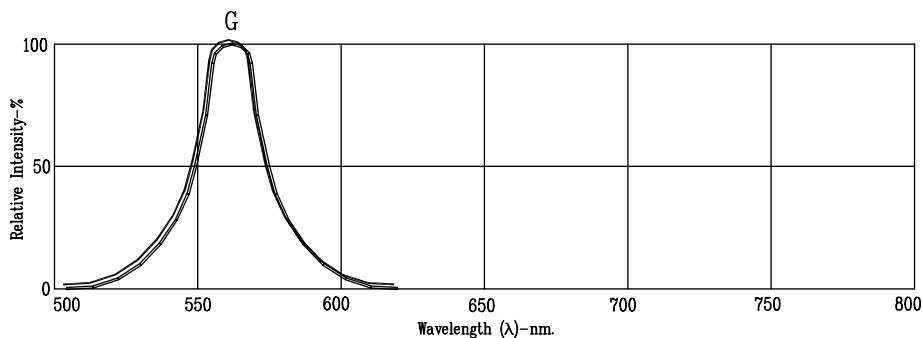


Fig1. RELATIVE INTENSITY VS. WAVELENGTH

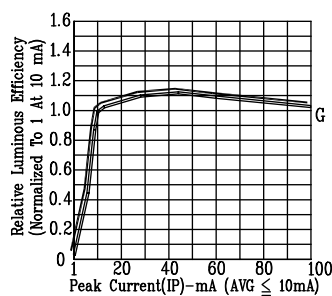


Fig2. RELATIVE LUMINOUS EFFICIENCY (LUMINOUS INTENSITY PER UNIT CURRENT) VS. PEAK CURRENT (REFRESH RATE 1KHz)

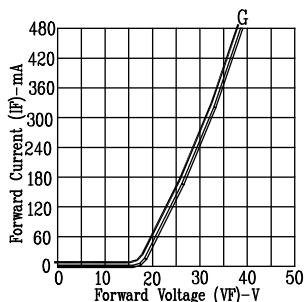


Fig3. FORWARD CURRENT VS. FORWARD VOLTAGE

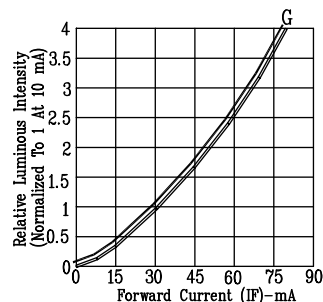


Fig4. RELATIVE LUMINOUS INTENSITY VS. FORWARD CURRENT

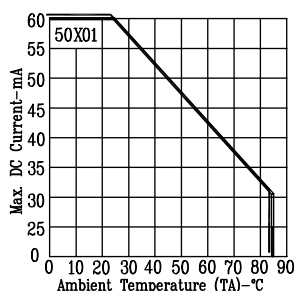


Fig5. MAX. ALLOWABLE DC CURRENT VS. AMBIENT TEMPERATURE.

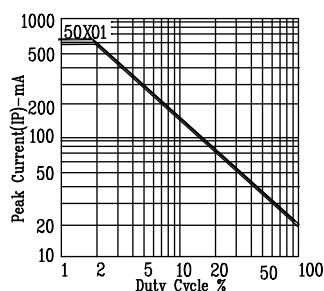


Fig6. MAX. PEAK CURRENT VS. DUTY CYCLE % (REFRESH RATE 1KHz)

NOTE: G=GREEN