



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



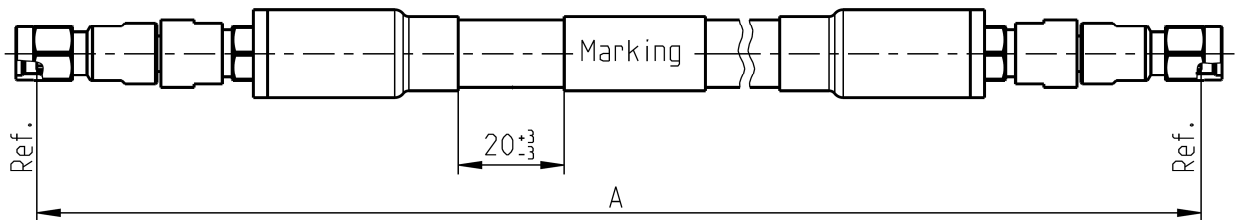

All dimensions are in mm; tolerances: ± 3mm for A ≤ 300 mm; ± 1% for A > 300 mm

Available variants

Type	max. Insertion loss at 26.5 GHz	Marking	Weight (g) / pce
LU7-115-XXX	≤ 0.00203 dB/mm * A mm + 0.4 dB	ROSENBERGER YYYW LU7-115-XXX FAC-RRRRRRR ssss	0.263 g/mm * A mm + 32 g

XXX – length in mm = A

Standard lengths are 500, 1000, 1500 and 2000 mm

WW – week

YYYY – year

ssss – serial no.

FAC – Factory Code

RRRRRRR – lot nr.

Assembly parts

Connector left	RPC-3.50 plug	03S122-2U7S3
Connector right	RPC-3.50 plug	03S122-2U7S3
Cable	RTK 162	
Armour	T1 - Polyurethane jacket over braid / stainless steel spiral	

Electrical data

Impedance	50 Ω
Frequency	DC to 26.5 GHz
Return loss ¹	≥ 19 dB, DC to 26.5 GHz
Insertion loss ¹	see table available variants

Individual testing and documentation:

Measurement plot with all 4 S-Parameters (S11; S22; S21; S12) is included with the cable assembly and on the backside the care and handling instruction is printed. Measurement adaptors used are mentioned in the commentary field.

¹ Includes measurement adaptor

Technical Data Sheet

Rosenberger

Cable assembly
RPC-3.50 Plug / RPC-3.50 Plug - RTK 162 Cable - T1

LU7-115-XXX

Mechanical data

Minimum bend radius:
Single 25.5 mm
Multiple 50.8 mm
Crush resistance 80 N/mm

Environmental data

Temperature range -40°C to +80°C
RoHS compliant

Packing

Standard 1 pce in box

While the information has been carefully compiled to the best of our knowledge, nothing is intended as representation or warranty on our part and no statement herein shall be construed as recommendation to infringe existing patents. In the effort to improve our products, we reserve the right to make changes judged to be necessary.

Draft	Date	Approved	Date	Rev.	Engineering change number	Name	Date
Martin Moder	26.01.12	Scherbauer M.	17.12.14	b00	14-s421	S. Andorfer	17.12.14

Rosenberger Hochfrequenztechnik GmbH & Co. KG P.O.Box 1260 D-84526 Tittmoning Germany www.rosenberger.de	Tel. : +49 8684 18-0 Email : info@rosenberger.de	Page 2 / 2
--	--	---------------