



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



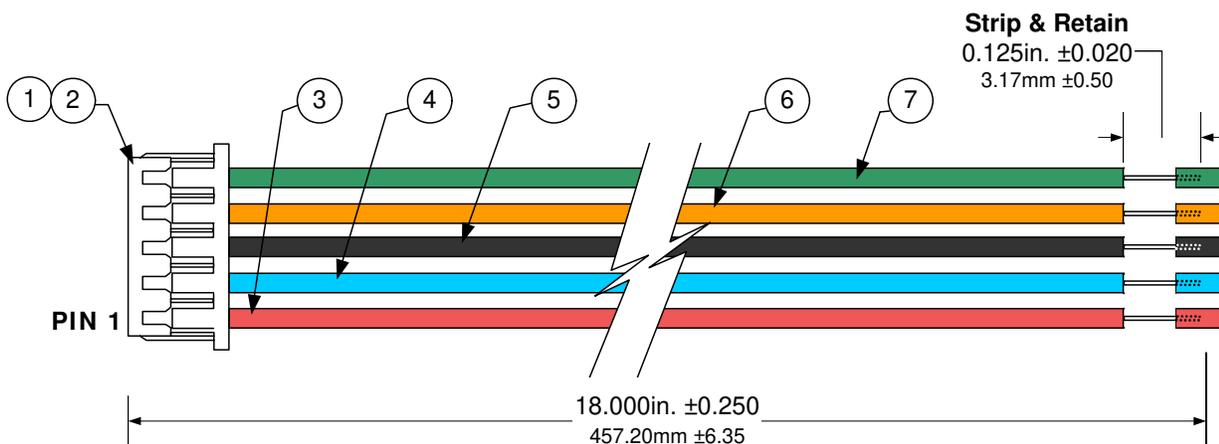
Input Cable Assembly
PRODUCTION DATA SHEET
DESCRIPTION

The LX9506 is an input-connector (457mm) lengths of UL1061 AWG#26 cable assembly that is used to connect wire. This cable assembly is designed to save users the job of obtaining housing, pin, wire, and crimp-tools in addition to the assembly of an evaluation board. Microsemi's standard line of backlight inverter products. The connector housing is interconnectable and compatible with PC boards mounted with the Molex* 53261 series 5-pin SMT header. The housing and phosphor bronze tin plated pins are crimp-terminated to 18-inch

KEY FEATURES

- Used for Interconnection of Backlight Inverter Connector (Molex 53261) to Power, Ground, and Control Signal
- Generous 18-inch (457mm) Lead Length to accommodate Most Applications
- Pre-Stripped Ends Facilitate Ease of Hook-up
- Leads Color-Coded for Quick and Accurate Termination
- Wire is 300 Volt Rated to 80°C, PVC Insulated and is Stranded in a 7X #34 Configuration
- RoHS Compliant / Pb-free

IMPORTANT: For the most current data, consult MICROSEMI's website: <http://www.microsemi.com>

PRODUCT HIGHLIGHT


Item	Description
1	Molex* 51021 Series
2	Molex* 50079 Series
3	UL 1061, 26 AWG, Red Wire
4	UL 1061, 26 AWG, Blue Wire
5	UL 1061, 26 AWG, Black Wire
6	UL 1061, 26 AWG, Orange Wire
7	UL 1061, 26 AWG, Green Wire

Pin #	Color Coding
1	Red
2	Blue
3	Black
4	Orange
5	Green

* Molex is a Registered Trademark of Molex, Inc.

MODEL ORDER INFO

RoHS Compliant / Pb-free

LX9506