



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



LXC150H series

LED Power
150W

LED Power Supply

480VAC Input LED Power Supplies

LED POWER

next generation power source

FEATURES

- High Efficiency (up to 91%)
- High Input 249-528VAC
- Constant Output Current
- Active PFC (Typical 0.95)
- IP67 Waterproof
- OVP, SCP, OTP
- -35 to 65°C deg operation
- UL8750 Approved
- EN61347-1, -2-13 compliant

The LXC150H series of constant current LED power supplies operates off an input voltage of 249-528VAC making it ideal for 347VAC and 480VAC input lighting systems, such as highway lighting.

The LXC150H series of constant current power supplies provides up to 4200mA of output current or 428V output voltage solutions for specific LED requirements. With industry leading efficiencies, and an extensive protection feature set, the LXC150H series provides high reliability and high performance in a compact package.

The LXC150H series carries the UL and CE mark for safety and is also RoHS compliant.

Model Number	Output Voltage	Output Current	Input Voltage	Efficiency
LXC150-0580SH	129-258V	350mA	249-528VAC	91.0%
LXC150-0700SH	107-214V	700mA	249-528VAC	91.0%
LXC150-1050SH	71-142V	1050mA	249-528VAC	90.0%
LXC150-1400SH	53-107V	1400mA	249-528VAC	90.0%
LXC150-2800SH	27-54V	2800mA	249-528VAC	90.0%
LXC150-3500SH	21-43V	3500mA	249-528VAC	89.0%
LXC150-4200SH	18-36V	4200mA	249-528VAC	89.0%

Input Specifications					
Parameter	Conditions/Description	Min	Nom	Max	Units
Input Voltage Range		249		528	VAC
Input Frequency Range		47		63	Hz
Input Current	277AC in, 150W output			0.70	A
Leakage Current	480VAC in, 50Hz			1.0	mA
Inrush Current	480VAC in, 25°C, Cold Start			50	A
Power Factor	480VAC, 277VAC	0.90		0.95	
Output Specifications					
Parameter	Conditions/Description	Min	Nom	Max	Units
Line Regulation				±1	%
Load Regulation				±3	%
Voltage Range	See table of outputs				
Output Current Range	% of Iout			±5	%
Ripple and Noise	20MHz Bandwidth. See Note 1			5.0	% pk-pk
Overshoot				10	%
Turn-on Delay	Measured at 277/480VAC and full load			3.0	s
Short Circuit Protection	Auto Recovery				
Over Voltage Protection	Latching.	120	135	150	%Vout
Over Temp Protection	Auto Recovery, 110°C internal component temperature				
General Specifications					
Parameter	Conditions/Description	Min	Nom	Max	Units
Isolation Voltage	Input to Output See Note 2	3750			VAC
	Input to Chassis	1500			VAC
Efficiency	See individual models				
Safety	UL8750, EN61347-1, -2-13, UL1012, CAN/CSA-C22.2 No. 223-M91, C22.2 No. 107.1-01				
MTBF	MIL-HDBK-217F, 480VAC input, 80% load, 25°C		132,000		Hours
Lifetime	480VAC input, 80% load, 45°C		56,000		Hours
Weight			1300		g
Operating Temperature		-35		+65	°C
Storage Temperature		-40		+85	°C
Relative Humidity	Non-condensing (operating)	10		100	%RH

Specifications are subject to change without notice



Europe/Asia

Excelsys Technologies Ltd t: +353 21 4354716
 27 Eastgate Drive f: +353 21 4354864
 Eastgate Business Park e: sales@excelsys.com
 Little Island, Cork, Ireland
 IRELAND

North America

Excelsys Technologies t: (972) 771 4544
 519 Interstate 30, #309 f: (972) 421 1805
 Rockwall, TX 75087 e: salesusa@excelsys.com
 USA

EMC				
Parameter	Standard		Level	Units
Emissions				
Conducted	EN55015		Compliant	
Radiated	EN55015		Compliant	
Harmonic Distortion	EN61000-3-2		Compliant	
Flicker and Fluctuation	EN61000-3-3		Compliant	
Immunity				
ESD	EN61000-4-2		Level 3 (B)	
Radiated RFI	EN61000-4-3		Level 2 (A)	
Fast Transients - burst	EN61000-4-4		Level 2 (B)	
Surge Immunity	EN61000-4-5		Compliant	
Conducted RFI	EN61000-4-6		Level 2 (A)	
Power Freq Magnetic Field	EN61000-4-8		Compliant	
Voltage Dips	EN61000-4-11		Compliant	

Note 1. Output connected in parallel with 0.1uF ceramic capacitor and 10uF electrolytic capacitor.
 Note 2. Primary to Secondary Isolation test not to be carried out on power supply.

INPUT / OUTPUT WIRING


INPUT CABLE

SJTW 18AWG 3C
 Black (L), White(N), Green(E) 650±20mm

OUTPUT CABLE

SJTW 18AWG 2C
 Blue (-V) and Red (+V) 220±20mm

MECHANICAL SPECIFICATIONS


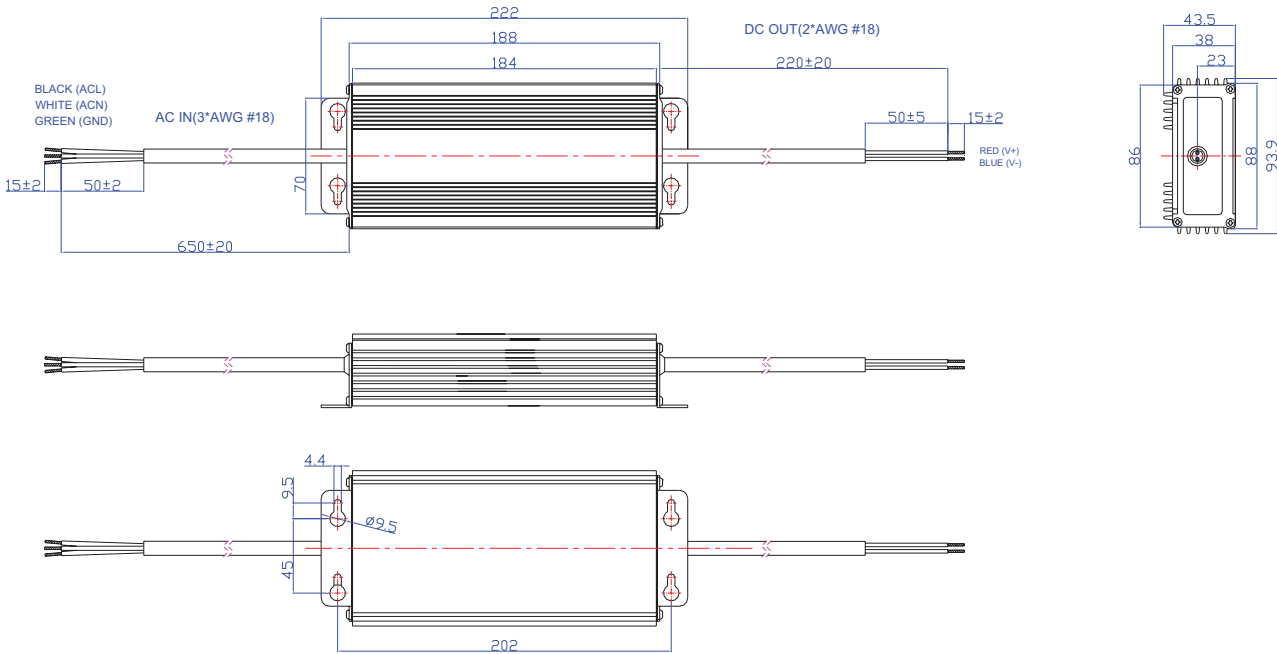


Specifications are subject to change without notice





Europe/Asia Excelsys Technologies Ltd 27 Eastgate Drive Eastgate Business Park Little Island, Cork, Ireland IRELAND	t: +353 21 4354716 f: +353 21 4354864 e: sales@excelsys.com	North America Excelsys Technologies 519 Interstate 30, #309 Rockwall, TX 75087 USA	t: (972) 771 4544 f: (972) 421 1805 e: salesusa@excelsys.com
---	---	---	--

Power Factor Characteristics

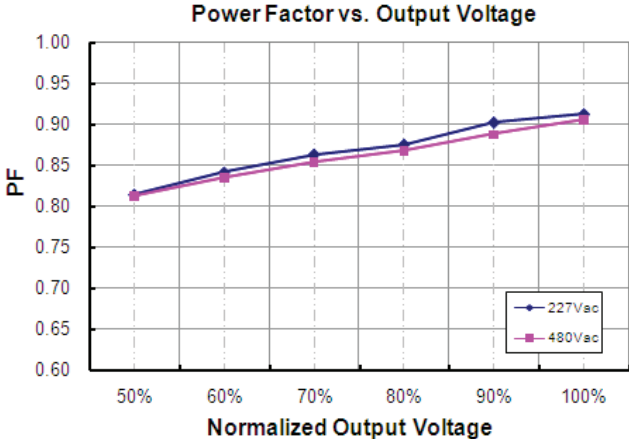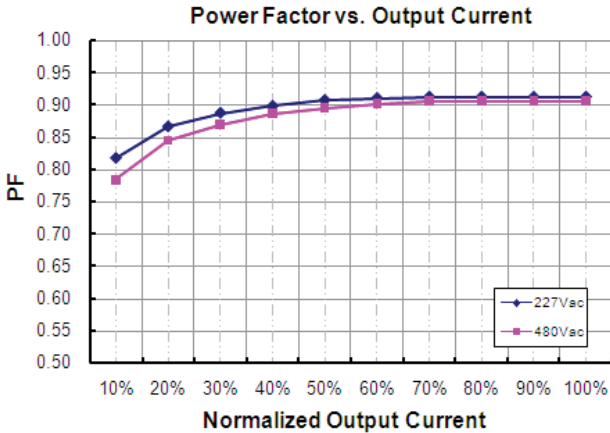

Efficiency vs Load (580mA Model)

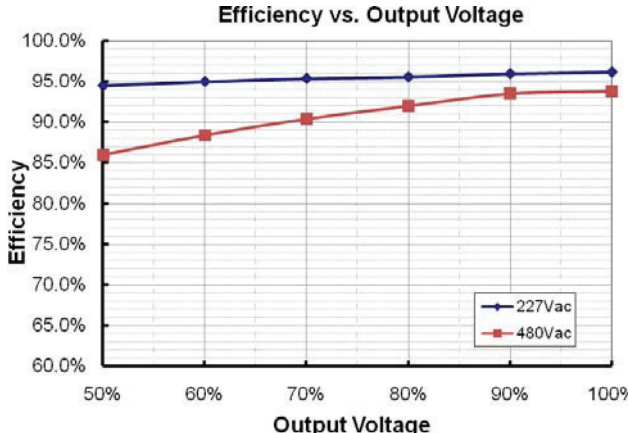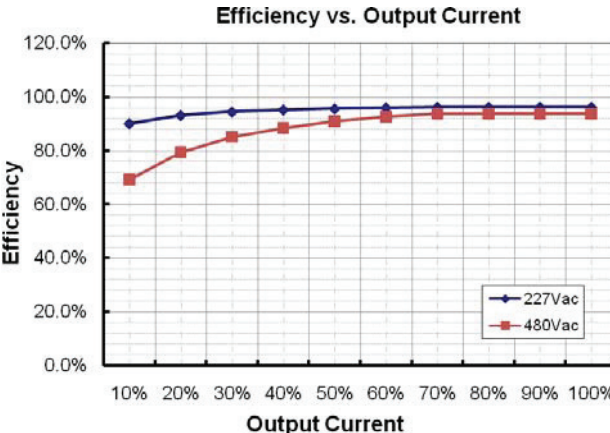

Specifications are subject to change without notice

