



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



LXD75H series

LED Power Supply

480VAC Input Dimmable LED Power Supplies



LED Power
75W

LED POWER

next generation power source

FEATURES

- High Efficiency (up to 87%)
- High Input 249-528VAC
- Constant Output Current
- Active PFC (Typical 0.95)
- IP67 Waterproof
- OVP, SCP, OTP
- -35 to 70°C deg operation
- UL8750 Approved
- EN61347-1, -2-13 compliant

The LXD75H series of constant output current LED power supplies operates off an input voltage of 249-528VAC making it ideal for 347VAC and 480VAC input lighting systems, such as highway lighting.

The LXD75H series provides up to 3150mA of output current or 214V output voltage solutions for specific LED requirements. With industry leading efficiencies, and an extensive protection feature set, the LXD75H series provides high reliability and high performance in a compact package. The LXD75H series carries the UL and CE mark for safety and is also RoHS compliant.

Model Number	Output Voltage	Output Current Range	Input Voltage	OVP Latching max	Efficiency
LXD75-0350SH ⁽²⁾	107-214V	35-350mA	249-528VAC	321V	87.0%
LXD75-0700SH ⁽²⁾	53-107V	70-700mA	249-528VAC	161V	86.0%
LXD75-1050SH ⁽²⁾	36-72V	105-1050mA	249-528VAC	108V	87.0%
LXD75-1400SH ⁽³⁾	26-53V	140-1400mA	249-528VAC	81V	87.0%
LXD75-2100SH ⁽⁴⁾	18-36V	210-2100mA	249-528VAC	54V	86.0%
LXD75-3150SH ⁽⁴⁾	12-24V	315-3500mA	249-528VAC	36V	85.0%

Input Specifications

Parameter	Conditions/Description	Min	Nom	Max	Units
Input Voltage Range		249		528	VAC
Input Frequency Range		47		63	Hz
Input Current	277AC in, 75W output			0.32	A
Leakage Current	480VAC in, 50Hz			2.0	mA
Inrush Current	480VAC in, 25°C, Cold Start			60	A
Power Factor	480VAC, 277VAC	0.90		0.95	

Output Specifications

Parameter	Conditions/Description	Min	Nom	Max	Units
Line Regulation				±1	%
Load Regulation				±3	%
Voltage Range	See table of outputs				
Output Current Range	See table of outputs				
Output Current Tolerance				±5	%
Output Current Ripple	% load		20	30	%
Turn-on Delay	Measured at 277/480VAC and full load		1.0	3.0	s
Short Circuit Protection	Auto Recovery				
Over Voltage Protection	Latching. See individual models OVP levels	120	135	150	%Vout
Over Temp Protection	Latching, 110°C internal component temperature				

General Specifications

Parameter	Conditions/Description	Min	Nom	Max	Units
Isolation Voltage	Input to Output See Note 1	3750			VAC
	Input to Chassis	1500			VAC
Efficiency	See individual models				
Safety	UL8750, UL1310 (See Notes 2,3 & 4), EN61347-1,-2-13				
MTBF	MIL-HDBK-217F, 480VAC input, 80% load, 25°C		380,000		Hours
Lifetime	480VAC input, 80% load, 45°C		140,000		Hours
Weight			1000		g
Operating Temperature		-35		+70	°C
Storage Temperature		-40		+85	°C
Relative Humidity	Non-condensing (operating)	10		100	%RH

- Note 1. Primary to Secondary Isolation test not to be carried out on power supply.
 Note 2. Non - UL1310 Class 2 output in USA and Canada.
 Note 3. UL1310 Class 2 output for in USA only.
 Note 4. UL1310 Class 2 outputs for USA and Canada.

Specifications are subject to change without notice



Europe/Asia

Excelsys Technologies Ltd
 27 Eastgate Drive
 Eastgate Business Park
 Little Island, Cork, Ireland
 IRELAND

t: +353 21 4354716

f: +353 21 4354864

e: sales@excelsys.com

North America

Excelsys Technologies
 519 Interstate 30, #309
 Rockwall, TX 75087
 USA

t: (972) 771 4544

f: (972) 421 1805

e: salesusa@excelsys.com

EMC					
Parameter	Standard			Level	Units
Emissions					
Conducted	EN55015		Compliant		
Radiated	EN55015		Compliant		
Harmonic Distortion	EN61000-3-2		Class C		
Flicker and Fluctuation	EN61000-3-3		Compliant		
Immunity					
ESD	EN61000-4-2		Level 3 (A)		
Radiated RFI	EN61000-4-3		Level 3 (A)		
Fast Transients - burst	EN61000-4-4		Level 3 (A)		
Surge Immunity	EN61000-4-5		Compliant		
Conducted RFI	EN61000-4-6		Level 3 (A)		
Power Freq Magnetic Field	EN61000-4-8		Compliant		
Voltage Dips	EN61000-4-11		Compliant		

Dimming Control					
Parameter		Min	Nom	Max	Units
12V Output Voltage		10.8	12	13.2	V
12V Output Source Current		0		20	mA
Control Voltage (1-10V input)	Voltage applied on 1-10V input wire	-2		15	V
Source Current (1-10V input)	Source current on 1-10V input wire	0		200	uA

- Note A. If dimming function is not used, 12V(Blk/Wht) and 1-10V(purple)wire must be connected together.
 Note B. Primary to Secondary Isolation test not to be carried on power supply.
 Note C. Load Voltage must be maintained above minimum voltage. See models for voltage range.
 Note D. Dimming range is 10%-100%
 Note E. Dimming Signal Voltage should be above 1V for linear dimming control.
 Note F. See Dimming Implementation diagrams for various dimming methods.
 Note G. Do not connect Dim - (Grey) cable to Output -V cable

INPUT / OUTPUT WIRING

INPUT CABLE

SJTW 18AWG 3C
 Black (L), White(N), Green(E) 650±20mm



OUTPUT CABLE

SJTW 18AWG 2C
 Black (-V) and Red (+V) 220±20mm

DIMMING CONTROL CABLE

22AWG 3C
 Blk/Wht (12V), Purple (1-10V), Grey (Dim -)
 270±20mm

Dimming Implementation Diagrams

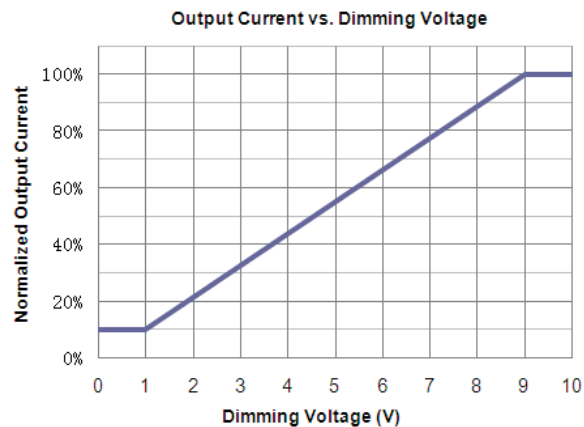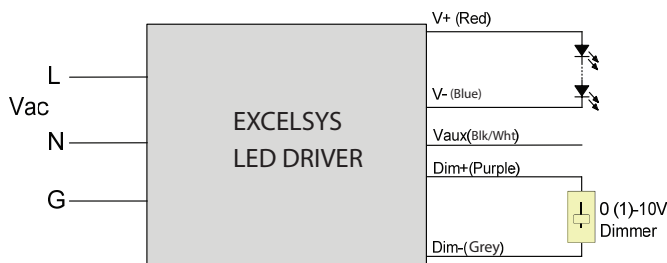

Europe/Asia

Excelsys Technologies Ltd
 27 Eastgate Drive
 Eastgate Business Park
 Little Island, Cork, Ireland
 IRELAND

t: +353 21 4354716

f: +353 21 4354864

e: sales@excelsys.com


North America

Excelsys Technologies
 519 Interstate 30, #309
 Rockwall, TX 75087
 USA

t: (972) 771 4544

f: (972) 421 1805

e: salesusa@excelsys.com

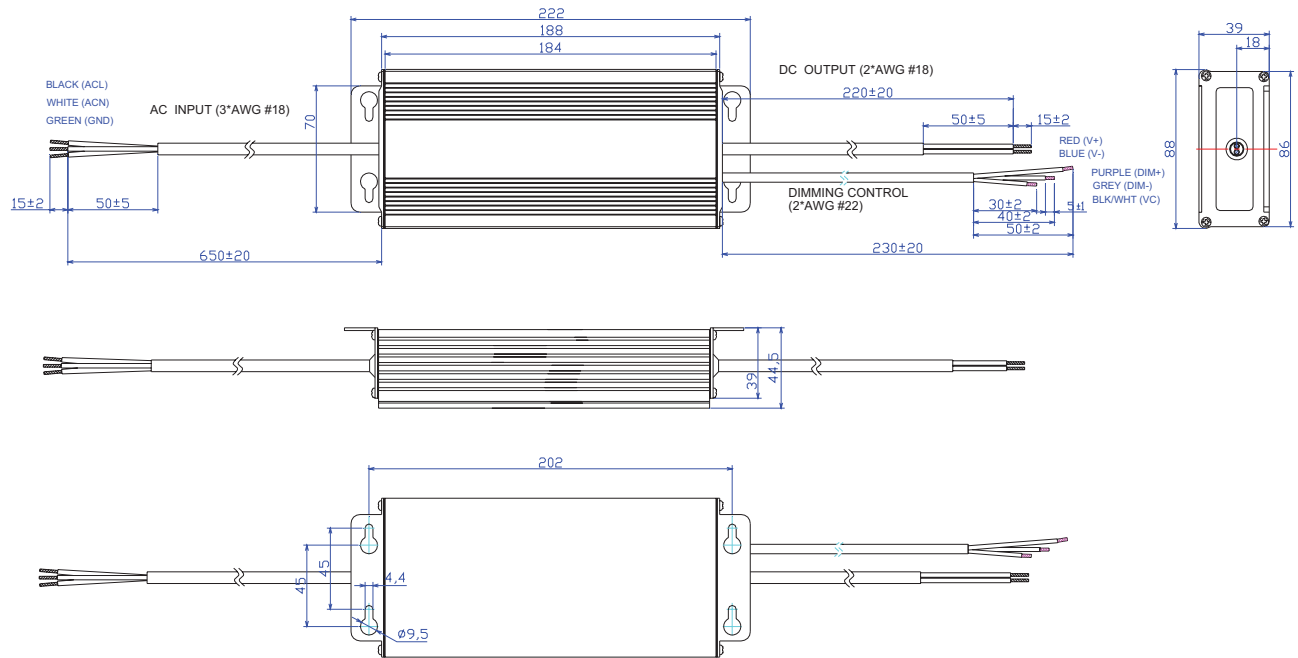MECHANICAL SPECIFICATIONS

Specifications are subject to change without notice

**Europe/Asia**

Excelsys Technologies Ltd
27 Eastgate Drive
Eastgate Business Park
Little Island, Cork, Ireland
IRELAND

t: +353 21 4354716
f: +353 21 4354864
e: sales@excelsys.com

North America

Excelsys Technologies
519 Interstate 30, #309
Rockwall, TX 75087
USA

t: (972) 771 4544
f: (972) 421 1805
e: salesusa@excelsys.com