



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



LXV300H series

LED Power Supply

Constant Voltage Power Supplies

LED Power
300W

LED POWER

next generation power source

FEATURES

- High Efficiency 91%
- 249-528VAC Input
- IP67 Waterproof
- Active PFC (Typical 0.95)
- OCP, SCP, OTP
- -35 to 70°C deg operation
- UL8750 Approved
- EN61347-1, -2-13 compliant

The LXV300H series of constant voltage LED power supplies operates off 249-528VAC input voltage making it ideal for 347VAC and 480VAC input applications.

The LXV300H series of constant output voltage solutions delivers up to 300W of output power for high power LED applications. With industry leading efficiencies, and an extensive protection feature set, the LXV300H series provides high reliability and high performance in a compact package. The LXV300H series carries the UL and CE mark for safety and is also RoHS compliant.

Model Number	Output Voltage	Output Current	Input Voltage	Efficiency
LXV300-024SH	24V	12.50A	249-528VAC	90.0%
LXV300-028SH	28V	10.71A	249-528VAC	91.0%
LXV300-036SH	36V	8.33A	249-528VAC	91.0%
LXV300-048SH	48V	6.25A	249-528VAC	91.0%

Input Specifications					
Parameter	Conditions/Description	Min	Nom	Max	Units
Input Voltage Range		249		528	VAC
Input Frequency Range		47		63	Hz
Input Current	277VAC in, 300W output			1.4	A
Power Factor	480VAC, 277VAC	0.92		0.95	
Inrush Current	At 480 VAC input, 25°C cold start			60	A
Output Specifications					
Parameter	Conditions/Description	Min	Nom	Max	Units
Line Regulation				±1	%
Load Regulation				±1.5	%
Output Voltage Tolerance	% of Vout			±3	%
Ripple and Noise	20MHz Bandwidth. See Note 1			2.0	% pk-pk
Dynamic Response	Output Deviation R/S : 1 A / μ S Settling Time Load : 25% ~ 75% full Load			5% Vo 10 mS	
Overshoot				10	%
Turn-on Delay	Measured at 480VAC and full load		1.0	3.0	s
Short Circuit Protection	Auto Recovery				
Over Current Protection	Hiccup.	110	145	180	% Io
OverTemperature Protection	Latching. Internal Component Temperature			110	°C
General Specifications					
Parameter	Conditions/Description	Min	Nom	Max	Units
Isolation Voltage	Input to Output See Note 2 Input to Chassis	3000 1500			VAC VAC
Efficiency	See individual models		91.0		%
Safety Agency Approvals	UL8750, EN61347-1, -2-13, UL1012				
No load Power Dissipation	Measured at 300VAC and 480VAC			3.0	W
MTBF	MIL HDBK-217F, 480VAC input, 80% load 25°C		92,000		Hours
Lifetime	480VAC input, 80% load 25°C		52,000		Hours
Weight			1400		g
Operating Temperature	Derating - See graph	-35		+70	°C
Storage Temperature		-40		+85	°C
Relative Humidity	Non-condensing (operating)	10		100	%RH

Note 1.

Output connected in parallel with 0.1 μ F ceramic capacitor and 10 μ F electrolytic capacitor.

Note 2.

Primary to Secondary Isolation test not to be carried on power supply.

Specifications are subject to change without notice



Europe/Asia

Excelsys Technologies Ltd t: +353 21 4354716
 27 Eastgate Drive f: +353 21 4354864
 Eastgate Business Park e: sales@excelsys.com
 Little Island, Cork, Ireland
 IRELAND

North America

Excelsys Technologies t: (972) 771 4544
 519 Interstate 30, #309 f: (972) 421 1805
 Rockwall, TX 75087 e: salesusa@excelsys.com
 USA

EMC			
Parameter	Standard	Level	Units
Emissions			
Conducted	EN55015	Level B	
Radiated	EN55015	Level B	
Flicker and Fluctuation	EN61000-3-3	Compliant	
Immunity			
ESD	EN61000-4-2	Level 3 (A)	
Radiated RFI	EN61000-4-3	Level 3 (A)	
Fast Transients - burst	EN61000-4-4	Level 3 (A)	
Input Line Surges	EN61000-4-5	Compliant	
Conducted RFI	EN61000-4-6	Compliant	
Power Freq Magnetic Field	EN61000-4-8	Compliant	
Voltage Dips	EN61000-4-11	Compliant	

INPUT / OUTPUT WIRING


INPUT CABLE

SJTW 18AWG 3C
Black (L) and White(N), Green (Earth) 650±20mm

OUTPUT CABLE

SJTW 18AWG 2C
Blue (-V) and Red (+V) 220±20mm

MECHANICAL SPECIFICATIONS

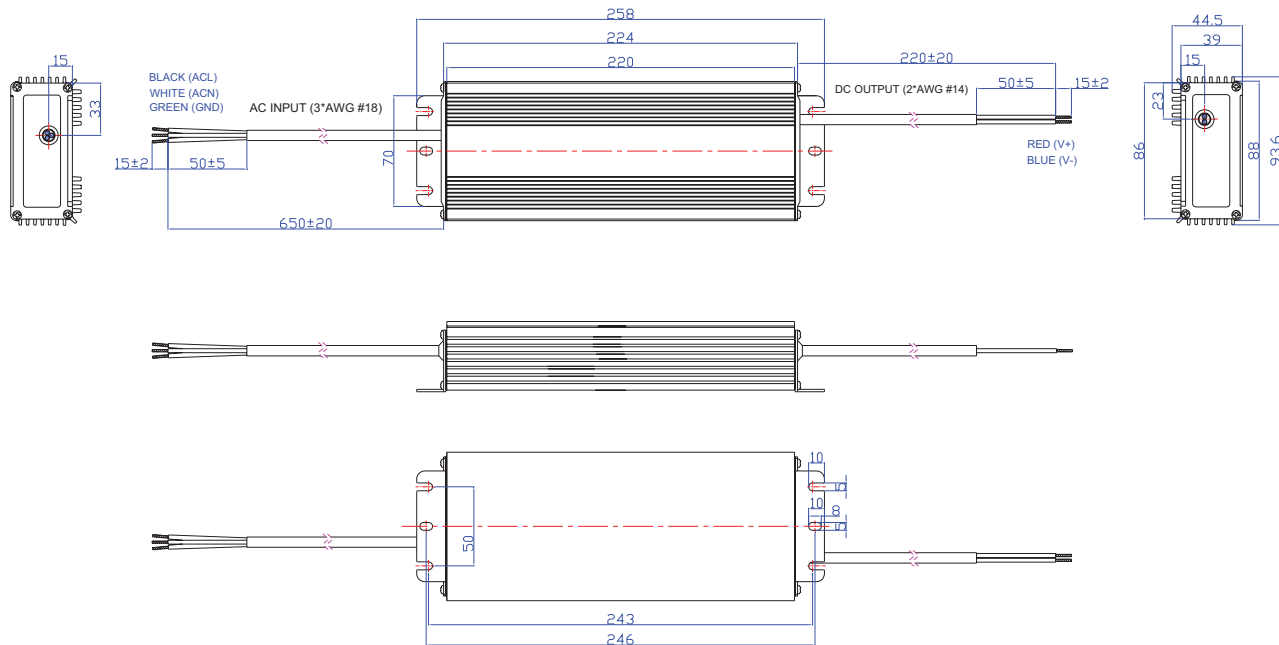


Specifications are subject to change without notice




Europe/Asia		North America	
Excelsys Technologies Ltd	t: +353 21 4354716	Excelsys Technologies	t: (972) 771 4544
27 Eastgate Drive	f: +353 21 4354864	519 Interstate 30, #309	f: (972) 421 1805
Eastgate Business Park	e: sales@excelsys.com	Rockwall, TX 75087	e: salesusa@excelsys.com
Little Island, Cork, Ireland		USA	
IRELAND			


Power Factor Characteristics

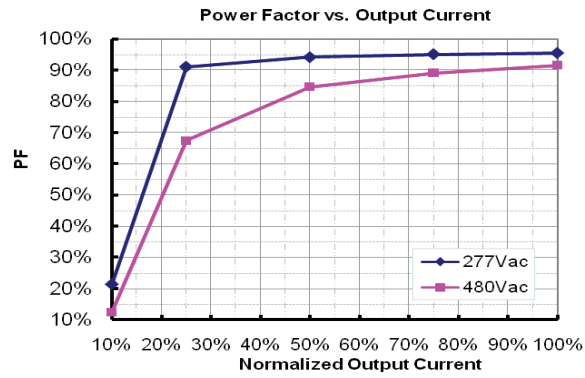

Efficiency vs Load (24v Model)

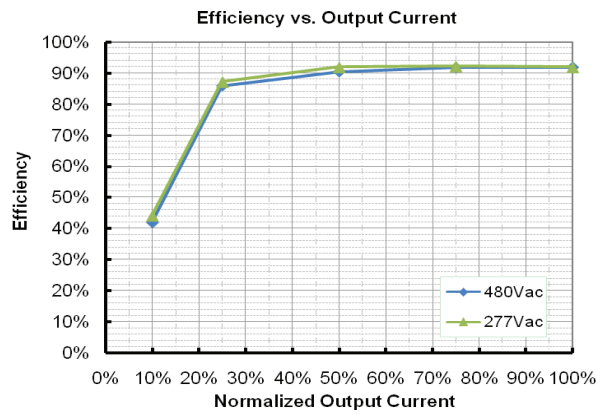

Derating Curve

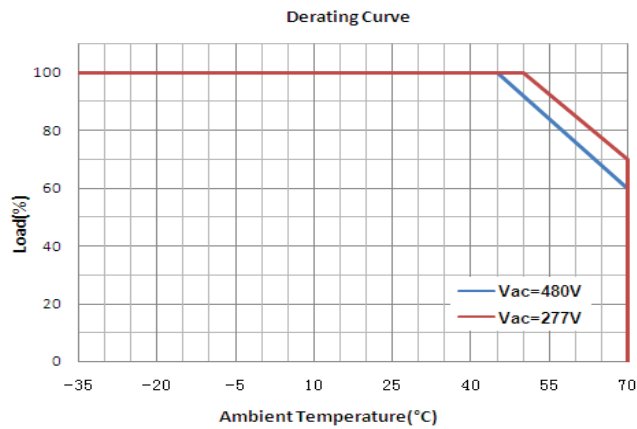

Europe/Asia

Excelsys Technologies Ltd
 27 Eastgate Drive
 Eastgate Business Park
 Little Island, Cork, Ireland
 IRELAND

t: +353 21 4354716
 f: +353 21 4354864
 e: sales@excelsys.com

North America

Excelsys Technologies
 519 Interstate 30, #309
 Rockwall, TX 75087
 USA

t: (972) 771 4544
 f: (972) 421 1805
 e: salesusa@excelsys.com