



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: [info@chipsmall.com](mailto:info@chipsmall.com) Web: [www.chipsmall.com](http://www.chipsmall.com)

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# LXV52 series

## LED Power Supply


### Constant Voltage Power Supplies

#### LED POWER

next generation power source

#### FEATURES

- High Efficiency 89%
- IP67 Waterproof
- Active PFC (Typical 0.92)
- OVP, SCP, OCP
- -35 to 70°C deg operation
- Wide Input 90-305VAC
- UL8750 recognised
- EN61347-1, -2-13 compliant

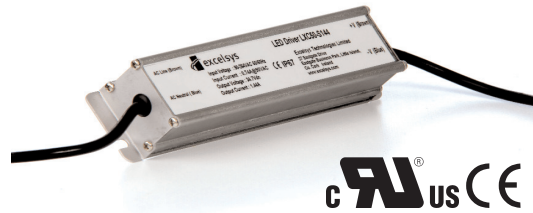

The LXV52 series of constant voltage LED power supplies from Excelsys Technologies can deliver up to 52W of output power in an extremely compact package size.

The LXV52 series of constant voltage power supplies provides a range of output voltage solutions for specific LED requirements. With industry leading efficiencies, and an extensive protection feature set, the LXV52 series provides high reliability and high performance in a compact package. The LXV52 series carries the UL and CE mark for safety and is also RoHS compliant.

Model Number	Output Voltage	Output Current	Input Voltage	Efficiency
LXV52-024SW <sup>(3)</sup>	24V	2.17A	90-305VAC	88.0%
LXV52-036SW <sup>(3)</sup>	36V	1.45A	90-305VAC	89.0%
LXV52-048SW <sup>(3)</sup>	48V	1.08A	90-305VAC	89.0%

Input Specifications					
Parameter	Conditions/Description	Min	Nom	Max	Units
Input Voltage Range	Universal Input.	90		305	VAC
Input Frequency Range		47		63	Hz
Input Current	100VAC in, 52W output			0.80	A
Leakage Current	277VAC in, 50Hz			0.75	mA
Inrush Current	230VAC in, 25°C, Cold Start			60	A
Power Factor	220VAC, 110VAC	0.92		0.98	
Output Specifications					
Parameter	Conditions/Description	Min	Nom	Max	Units
Line Regulation				±2	%
Load Regulation				±3	%
Voltage Accuracy	% of Vout			±5	%
Ripple and Noise	20MHz Bandwidth. See Note 1			4	V pk-pk
Overshoot/Undershoot	On power ON/OFF.			10	%
Turn-on Delay	Measured at 220VAC and full load		0.3	0.5	s
Short Circuit Protection	Auto Recovery				
Over Voltage Protection	Hiccup, Auto Recovery	110	120	130	%
Over Current Protection	Hiccup, Auto Recovery	120	150	170	%
General Specifications					
Parameter	Conditions/Description	Min	Nom	Max	Units
Isolation Voltage	Input to Output See Note 2 Input to Chassis	3750 1500			VAC VAC
Efficiency	See individual models				%
Safety Agency Approvals	UL8750, EN61347-1, -2-13, UL1310 (See Note 3)				
No load Power Dissipation	Measured at 120VAC and 220VAC			4	W
MTBF	MIL-HDBK 217F, 110VAC input, 80% load, 25°C	321,000			Hours
Lifetime	110VAC input, 80% load, 45°C, 24V Output Model	59,000			Hours
Weight			480		g
Operating Temperature		-35		+70	°C
Storage Temperature		-40		+85	°C
Relative Humidity	Non-condensing (operating)	10		100	%RH

Note 1.

Note 2.

Note 3.

Output connected in parallel with 0.1uF ceramic capacitor and 10uF electrolytic capacitor.

Primary to Secondary Isolation test not to be carried out on power supply.

UL 1310 Class 2 product, except LXV52-048SW which is Class 2 US only.



#### Europe/Asia

Excelsys Technologies Ltd  
27 Eastgate Drive  
Eastgate Business Park  
Little Island, Cork, Ireland  
IRELAND

t: +353 21 4354716  
f: +353 21 4354864  
e: sales@excelsys.com

#### North America

Excelsys Technologies  
519 Interstate 30, #309  
Rockwall, TX 75087  
USA

t: (972) 771 4544  
f: (972) 421 1805  
e: salesusa@excelsys.com

<b>Emissions</b>					
<b>Conducted</b>	EN55015		Level B		
<b>Radiated</b>	EN55015		Level B		
<b>Harmonic Distortion</b>	EN61000-3-2		Compliant		
<b>Flicker and Fluctuation</b>	EN61000-3-3		Compliant		
<b>Immunity</b>					
<b>ESD</b>	EN61000-4-2		Compliant		
<b>Radiated RFI</b>	EN61000-4-3		Compliant		
<b>Fast Transients - burst</b>	EN61000-4-4		Level 3(A)		
<b>Input Line Surges</b>	EN61000-4-5		Compliant		
<b>Conducted RFI</b>	EN61000-4-6		Compliant		
<b>Power Freq Magnetic Field</b>	EN61000-4-8		Compliant		
<b>Voltage Dips</b>	EN61000-4-11		Compliant		

**INPUT / OUTPUT WIRING****INPUT CABLE**


SJTW 18AWG

Black (L) and White(N) Green(Earth) 310±20mm

**OUTPUT CABLE**

SJTW 18AWG

Black (-V) and Red (+V) 300±20mm

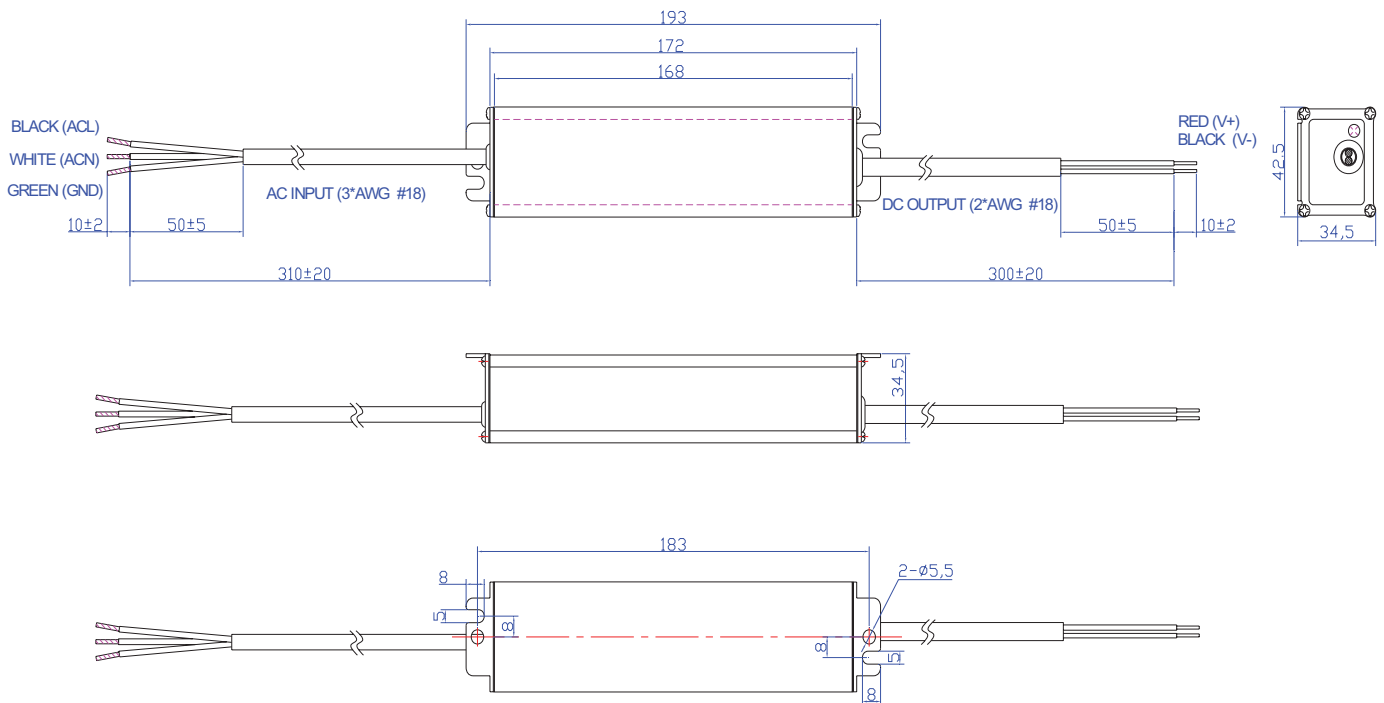**MECHANICAL SPECIFICATIONS**

Specifications subject to change without notice

**Europe/Asia**

Excelsys Technologies Ltd t: +353 21 4354716  
 27 Eastgate Drive f: +353 21 4354864  
 Eastgate Business Park e: sales@excelsys.com  
 Little Island, Cork, Ireland  
 IRELAND

**North America**

Excelsys Technologies t: (972) 771 4544  
 519 Interstate 30, #309 f: (972) 421 1805  
 Rockwall, TX 75087 e: salesusa@excelsys.com  
 USA