



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Magnets in Housing

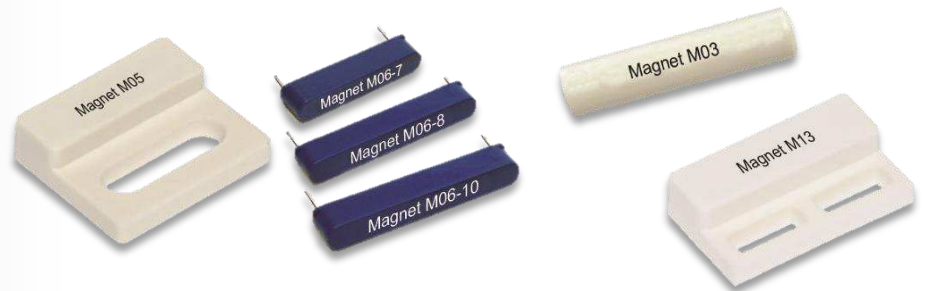

- M02, M03, M04, M05, M06, M11, M12, M13 and M21 Magnets in Housing are AlNiCo-Magnets mounted in robust casings matching with the MK-Reed Sensor Series for screw fasten, threaded or PCB mount.

Part-Description: **M 0 0**

Option
02, 03, 04, 05, 06, 11 (S/P/B), 12, 13, 21 P (1/2)

Series	Material Housing	Material Magnet	Magnetic Moment (typ.)*	Length	Width**	Height
M02	PBT Glass Fibre Reinforced	AlNiCo	22.2	32.4	16.7	10.0
M03	PBT Glass Fibre Reinforced	AlNiCo	22.2	25.5	M5x0.5	-
M04	PBT Glass Fibre Reinforced	AlNiCo	22.2	23.0	13.9	5.9
M05	PBT Glass Fibre Reinforced	AlNiCo	22.2	23.0	19.4	5.9
M06	PBT Glass Fibre Reinforced	AlNiCo		12.1-22.3	3.3	3.3
M11 (S)	High Grade Steel (1.4305)	AlNiCo	18.0/22.2	25.0	M5/M8 x 0.5	-
M11 (P)	Plastic	AlNiCo	22.2	38.0	M8 x 1.25	-
M11 (B)	Brass	AlNiCo	18.0/22.2	38.0	M6-M12	-
M12	PBT Glass Fibre Reinforced	AlNiCo	38	32.0	14.9	6.9
M13	PBT Glass Fibre Reinforced	AlNiCo	22.2	23.0	13.9	5.9
M21 P/1	Crastin SK655FR1	AlNiCo	22.2	28.5	19.0	6.25
M21 P/2	Crastin SK655FR1	AlNiCo	22.2	28.5	19.0	6.25


All Dimensions in mm

* Unit for Magnetic Moment: E-6 Vs*cm; Measured with MS150

** Stands for Diameter or Thread Size

➤ Activate Distance

Note: The mentioned distances in millimeters in the table are typical values, they can differ in applications.

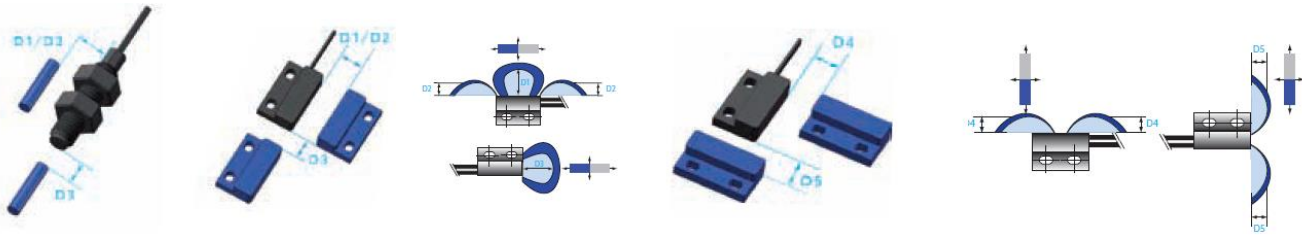

Type	Part-No.	Magnetic Sensitivity	Position and Movement max. Pull-In Distance mm					Position and Movement min. Drop-Out Distance in mm				
			D1	D2	D3	D4	D5	D1	D2	D3	D4	D5
MK03-1A66B-500W	2232711054	> 1,70	15	6,5	9,3	8,5	8,5	17,5	8,0	11,4	10,1	10,1
MK03-1A66C-500W	2233711054	> 2,30	13	4,4	7,4	7,2	7,2	16,5	6,5	9,9	9,5	9,5
MK03-1A66D-500W	2234711054	> 2,70	11	4	5,7	6,5	6,5	14,5	5,5	8,5	9	9
MK03-1A66E-500W	2235711054	> 3,10	10	3,5	4,5	5,7	5,7	13,5	5	8	8,5	8,5
MK04-1A66B-500W	2242661054	> 1,70	15	6,5	9,3	8,5	8,5	17,5	8,0	11,4	10,1	10,1
MK04-1A66C-500W	2243711054	> 2,30	13	4,4	7,4	7,2	7,2	16,5	6,5	9,9	9,5	9,5
MK04-1A66D-500W	2244711054	> 2,70	11	4	5,7	6,5	6,5	14,5	5,5	8,5	9,0	9,0
MK04-1A66E-500W	2245661054	> 3,10	10	3,5	4,5	5,7	5,7	13,5	5	8	8,5	8,5
MK05-1A66B-500W	2252711054	> 1,70	15	6,5	9,3	8,5	8,5	17,5	8	11,4	10,1	10,1
MK05-1A66C-500W	2253711054	> 2,30	13	4,4	7,4	7,2	7,2	16,5	6,5	9,9	9,5	9,5
MK05-1A66D-500W	2254661054	> 2,70	11	4	5,7	6,5	6,5	14,5	5,5	8,5	9	9
MK05-1A66E-500W	2255661054	> 3,10	10	3,5	4,5	5,7	5,7	13,5	5	8	8,5	8,5
MK06-4-A	2206040000	> 1,70	18	8,5	15	12	13,5	19	9,5	16	13,5	15
MK06-4-B	2206040001	> 1,70	16	7,5	12,5	10,5	11	17	8	13,5	11,5	12
MK06-4-C	2206040002	> 2,30	14	7	10,5	9,5	9,5	16	7,5	13	11	12
MK06-4-D	2206040003	> 2,70	13	6,5	10	9	9	15	7	11,5	10	10,5
MK06-4-E	2206040004	> 3,10	12	5,5	8,5	8	8	13	6	9,5	9	9
MK12-1A66B-500W	9122711054	> 1,70	18	8	14	13	11,5	20,5	10	17	14,5	13
MK12-1A66C-500W	9123711054	> 2,30	16	6	11,5	9,5	8,5	18	8,5	15	12,5	11,5
MK12-1A66D-500W	9124711054	> 2,70	14	5	7,5	7,5	5,5	17	6,5	11,5	11,5	9,5
MK12-1A66E-500W	9125711054	> 3,10	13	4	5,5	7	3,5	16	6	11	11	8,5
MK11/M8-1A66B-500W	9118266054	> 1,70	15,0	6,5	9,3	8,5	8,5	17,5	8	11,4	10,1	10,1
MK11/M8-1A66C-500W	9118366054	> 2,30	13	4,4	7,4	7,2	7,2	16,5	6,5	9,9	9,5	9,5
MK11/M8-1A66D-500W	9118066054	> 2,70	11	4	5,7	6,5	6,5	14,5	5,5	8,5	9	9
MK11/M8-1A66E-500W	9118566054	> 3,10	10	3,5	4,5	5,7	5,7	13,5	5	8	8,5	8,5

Type	Part-No.	Magnetic Sensitivity	Position and Movement max. Pull-In Distance mm					Position and Movement min. Drop-Out Distance in mm				
			D1	D2	D3	D4	D5	D1	D2	D3	D4	D5
MK13-1A66B-500W	9132661054	> 1,70	15,0	6,5	9,3	8,5	8,5	17,5	8	11,4	10,1	10,1
MK13-1A66C-500W	9133711054	> 2,30	13,0	4,4	7,4	7,2	7,2	16,5	6,5	9,9	9,5	9,5
MK13-1A66D-500W	9134711054	> 2,70	11,0	4,0	5,7	6,5	6,5	14,5	5,5	8,5	9	9
MK13-1A66E-500W	9135661054	> 3,10	10,0	3,5	4,5	5,7	5,7	13,5	5	8	8,5	8,5
MK14-1A66B-500W	9142711054	> 1,70	15	7	11	10	8	16	8	12	12	9
MK14-1A66C-500W	9143711054	> 2,30	11	5	8	9	6	13	6,5	10	11	7,5
MK14-1A66D-500W	9144711054	> 2,70	10	4	6	6	4,5	12	5	8	8	6,5
MK14-1A66E-500W	9145711054	> 3,10	9	3	4	4	2,5	11	4,5	7	6	5
MK15-B-2	9151710022	> 1,70	14	6,5	7	9	7	16	8	9	9,5	8
MK15-C-2	9151710023	> 2,30	13	6	6,5	8,5	6,5	15	7,5	8,5	9	7,5
MK15-D-3	9151710024	> 2,70	12	5,5	6	7,5	5,5	14	7	8	8,5	7
MK15-E-3	9151710025	> 3,10	11	5	4,5	7	3,5	13	6	7	8	6
MK16-B-2	9161870022	> 1,70	15	7	11	10	9,5	16	8	12	11	11
MK16-C-2	9161870023	> 2,30	13	6	8	8	8	14,5	7	10	10	9,5
MK16-D-2	9161870024	> 2,70	12	5,5	7	7,5	7	14	6,5	9	9,5	9
MK16-E-2	9161870025	> 3,10	11	5	6	7	5,5	13,5	6	9,5	9	8,5
MK17-B-2	9171009022	> 1,70	15	7,5	12,5	10	11	16	8	13,5	11	12
MK17-C-2	9171009023	> 2,30	14,5	7	10	9	9,5	15,5	7,5	11,5	10	10,5
MK17-D-2	9171009024	> 2,70	12,5	6	9,5	8	8	14	7	11	9,5	9,5
MK17-E-2	9171009025	> 3,10	12	5,5	8,5	7,5	7,5	13,5	6,5	10,5	8,5	9
MK18-B-300W	9182100034	> 1,70	16,5	8	14,5	10	12	18,5	9,5	16,5	10,5	14
MK18-C-300W	9183100034	> 2,30	14	7	11	9	9,5	15,5	8	12,5	10	11
MK18-D-300W	9184100034	> 2,70	12	5,5	9	8	7,5	14	7,5	11	9,5	10
MK18-E-300W	9185100034	> 3,10	11	5	7	7	6	13,5	7	10,5	9	9,5
MK20/1-B-100W	9202100014	> 1,70	11	5,5	9	6,5	7,5	11,5	6	10	7	8
MK20/1-C-100W	9203100014	> 2,30	10,5	5	8	6	7	11	5,5	9	6,5	7,5
MK20/1-D-100W	9204100014	> 2,70	10	4,5	7	5,5	6,5	10,5	5	8	6	7
MK20/1-E-100W	9205100014	> 3,10	9,5	4	6	5	6	10	4,5	7	5,5	6,5
MK21M-1A66B-500W	9212100054	> 1,70	13	5,5	4,5	8	3	14	6,5	5,5	9	4
MK21M-1A66C-500W	9213100054	> 2,30	11	4	2,5	6,5	1,5	13	6	4,5	8,5	3,5
MK21M-1A66D-500W	9214100054	> 2,70	9,5	3,5	1	5	1	11,5	5	2,5	7	2
MK21M-1A66E-500W	9215100054	> 3,10	8	2,5	x	4	x	10	3,5	x	6	x