



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832



Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China






This drawing is the property of Tusonix, Inc., and may not be used, reproduced, published or disclosed to others without expressed authorization by Tusonix Inc.

MARKETING SALES DRAWING
DIMENSIONS IN INCHES - DO NOT SCALE THIS DRAWING
DIMENSIONS IN METRIC - []




CIRCUIT


Electrical Testing
per Tusonix standard
test plans and Mil-Std-202
Test Methods.

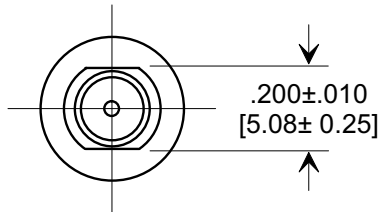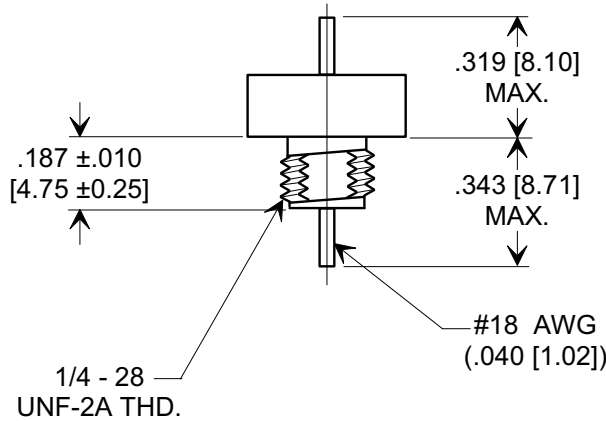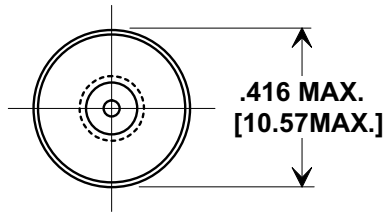

MOUNTING HARDWARE

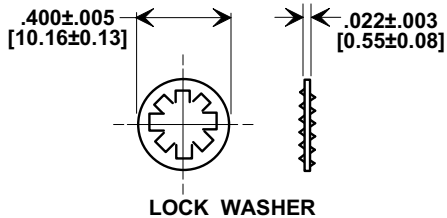

LOCK WASHER

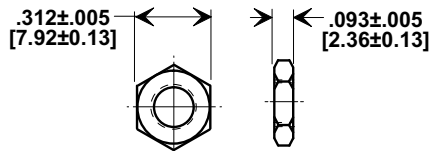

HEX NUT

NOTES:
MATERIALS:
 BUSHING - SILVER PLATED STEEL
 LEAD - SOLDER PLATED COPPER
 NUT - SILVER PLATED BRASS
 L'WASHER - SILVER PLATED PHOSPHOR BRONZE
 MOUNTING TORQUE: 8 lb - ins. max
 SEAL TESTED PER MIL-STD-202
 METHOD 112 CONDITION A.
 VOLTAGE DROP 0.15 VDC MAX.
 MAX. SOLDER TEMPERATURE 500°F

REF. Cx (μF)	WVDC 125°C	CURRENT DC	DWV	IR MIN.	MIN. NO LOAD INSERTION LOSS (dB) PER MIL-STD 220 @ +25°C						
					30 KHz	150 KHz	300 KHz	1 MHz	10 MHz	100 MHz	10GHz
0.68	50	15 A	125 VDC 60 SEC.	10 GΩ	8	20	28	38	55	70	70

X-2015 Rev-0 REVISION RECORD Original Release C.O. ECO-654	A	--TOLERANCES-- Unless Otherwise Specified	Title MIL-15733/49-0001		
			COAXIAL BROADBAND - "L"		
			DECIMAL ±	Drawn L.E. 04-09-09	Scale 2 X
			ANGLES ±	Approved R.L. 04-09-09	
		TUSONIX TUCSON, ARIZONA	A	4601-502	