

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China







Customer Information Sheet


DRAWING No.: M22-301XX00 SHEET 2 OF 2

IF IN DOUBT - ASK

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

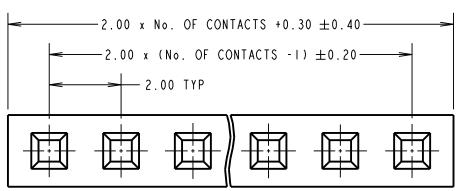


-PIN I INDICATOR, SEE NOTE 2

SPECIFICATION: MATERIAL MOULDING = NYLON 66 UL94V-2. BLACK ELECTRICAL: CURRENT RATING = IA AC/DC VOLTAGE RATING = 250V AC/DC MAX DIELECTRIC WITHSTANDING VOLTAGE = 800V AC FOR I MINUTE INSULATION RESISTANCE = 1000M Ω MIN FNVIRONMENTAL: OPERATING TEMPERATURE = -25°C TO +85°C

NOTES:

- I. TO BE USED WITH CRIMP CONTACTS M22-30400XX (REELED) OR M22-30500XX (LOOSE).
- 2. TRIANGLE PIN INDICATOR IS ON PIN I AND EVERY 5th PIN AFTER.

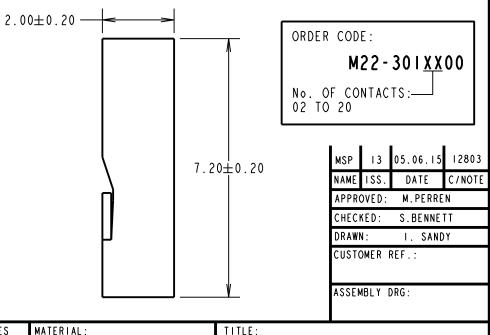

www.harwin.com technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION

TOLERANCES X. = ±1mm

 $X.X = \pm 0.50 mm$ $X.XX = \pm 0.10$ mm $X.XXX = \pm 0.01$ mm

ANGLES = ±5° UNLESS STATED MATERIAL:

S/AREA:

SFF ABOVE

SEE ABOVE FINISH:

DRAWING NUMBER:

mm²

M22-301XX00

2.00mm SIL CRIMP

SOCKET HOUSING

SHT 12 OF 2