



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Customer Information Sheet

DRAWING No.: M22-307XX00


IF IN DOUBT - ASK

©

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

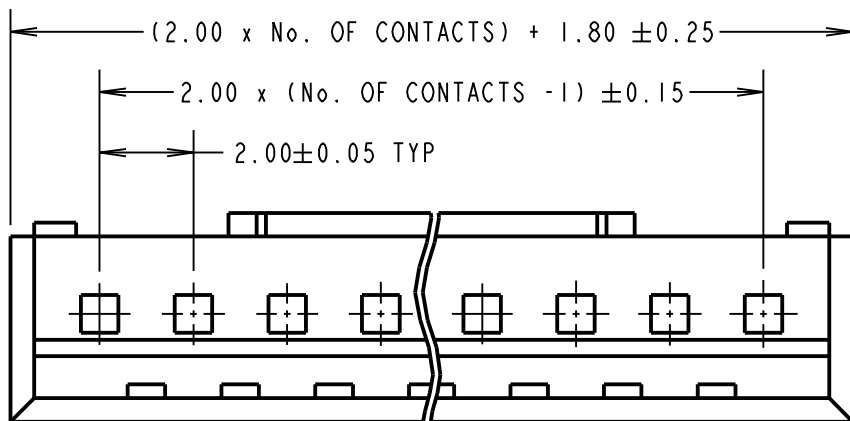



SPECIFICATION:

MATERIAL = NYLON 66, UL94V-0, NATURAL
 ELECTRICAL:
 VOLTAGE RATING = 100V AC/DC
 CURRENT RATING = 1A
 DIELECTRIC WITHSTANDING = 800V AC/MINUTE
 INSULATION RESISTANCE = 1000MΩ/MINUTE
 MECHANICAL:
 INSERTION FORCE = 6.9N MAX
 DURABILITY = 1 OPERATION
 ENVIRONMENTAL:
 TEMPERATURE RANGE = -25°C TO +95°C
 FOR COMPLETE SPECIFICATION, SEE COMPONENT SPECIFICATION C018XX (LATEST ISSUE).

ORDER CODE:

M22-307XX00

No. OF CONTACTS: _____
 02 TO 10

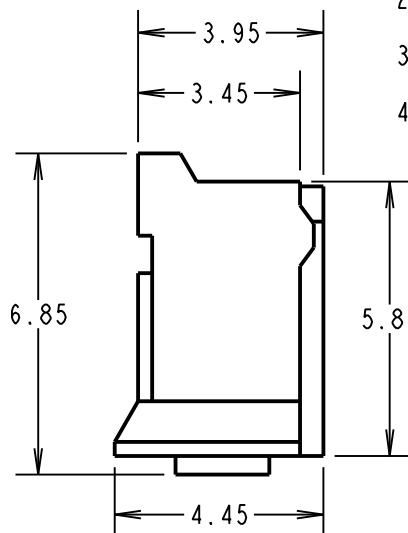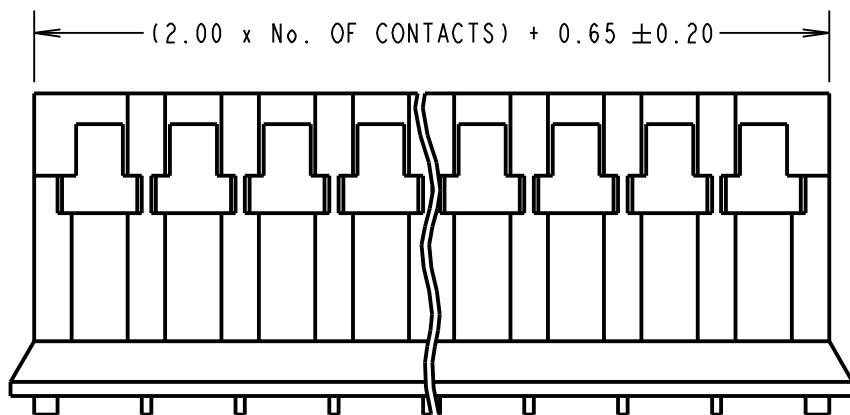

NOTES:

1. THIS MOULDING IS FOR USE WITH M22-30600XX AND M22-30800XX CRIMP TERMINALS.
2. THE ABOVE SPECIFICATIONS APPLY WHEN USED WITH THESE CRIMP TERMINALS.
3. ALL TOLERANCES ±0.15 UNLESS OTHERWISE STATED.
4. M22-307XX CONNECTORS ARE NOT DESIGNED TO BE PULLED APART OR SEPARATED EASILY. CONNECTORS ARE IDEAL FOR ONE CYCLE ONLY.

MSP	8	15.06.15	12803
NAME	ISS.	DATE	C/NOTE
APPROVED:		M.PERREN	
CHECKED:		S.BENNETT	
DRAWN:		D. BECK	
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

www.harwin.com
 technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES
~~X = ±1mm~~
~~X.X = ±0.50mm~~
~~X.XX = ±0.10mm~~
~~X.XXX = ±0.01mm~~
 ANGLES = ±5°
 UNLESS STATED

MATERIAL:
 SEE ABOVE
FINISH: CLEAN
S/AREA: mm²

TITLE:
 2mm CRIMP TERMINAL MOULDING
DRAWING NUMBER:
M22-307XX00
 SHT 2 OF 2