



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Customer Information Sheet

DRAWING No.: M30-110XX00

SHEET 2 OF 2



IF IN DOUBT - ASK

©

NOT TO SCALE

THIRD ANGLE PROJECTION

ALL DIMENSIONS IN mm

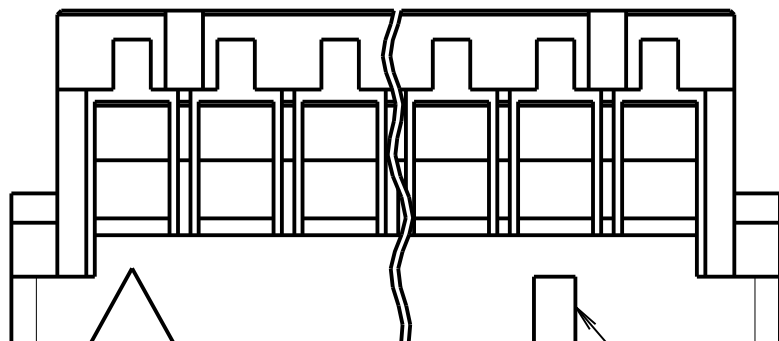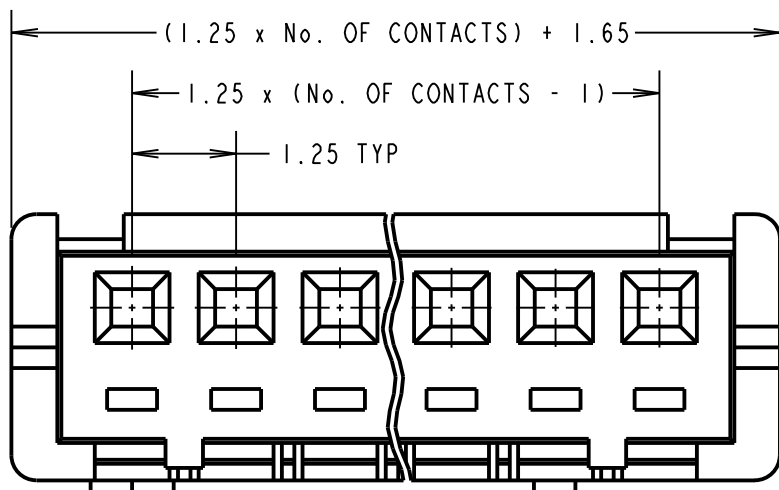

No. 1 POSITION

THIS FEATURE IS ON 05, 10 AND 15 SIZES ONLY.

SPECIFICATIONS:

MATERIAL:

MOULDING = NYLON 66 NATURAL, UL94V-0

ELECTRICAL:

CURRENT RATING = 1A AC/DC

VOLTAGE RATING = 150V AC/DC

CONTACT RESISTANCE = 30mΩ MAX

INSULATION RESISTANCE = 500MΩ MIN

DIELECTRIC WITHSTANDING VOLTAGE = 500V AC FOR ONE MINUTE

ENVIRONMENTAL:


TEMPERATURE RANGE = -25° TO +85°C

PACKING: BAG

FOR COMPLETE SPECIFICATION, SEE COMPONENT SPECIFICATION C025XX (LATEST ISSUE)

NOTES:

- TO BE USED IN CONJUNCTION WITH M30-1050046 OR M30-1060046 CRIMP CONTACTS. THE SPECIFICATIONS LISTED ARE APPROPRIATE WHEN USED WITH THESE CONTACTS.
- MATES WITH M30-600X46 AND M30-610X46 PIN HEADERS.
- ALL TOLERANCES ±0.25 UNLESS OTHERWISE STATED.

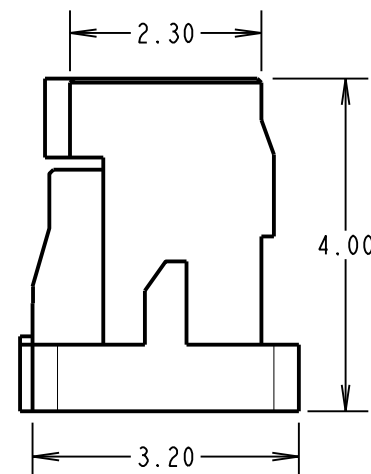

ORDER CODE:

M30-110XX00

No. OF CONTACTS
02 TO 15

SB	9	01.07.13	12134
NAME	ISS.	DATE	C/NOTE
APPROVED:		S. BENNETT	
CHECKED:		M. PLESTED	
DRAWN:		D. BECK	
CUSTOMER REF.:			
ASSEMBLY DRG:			

HARWIN

www.harwin.com
technical@harwin.com

THIS DRAWING AND ANY INFORMATION OR DESCRIPTIVE MATTER SET OUT HEREON ARE CONFIDENTIAL AND COPYRIGHT PROPERTY OF THE HARWIN GROUP AND MUST NOT BE DISCLOSED, LOANED, COPIED OR USED FOR MANUFACTURING, TENDERING OR FOR ANY OTHER PURPOSE WITHOUT THEIR WRITTEN PERMISSION.

TOLERANCES

~~X = ±1mm
X.X = ±0.25mm
X.XX = ±0.10mm
X.XXX = ±0.01mm
ANGLES = ±5°
UNLESS STATED~~

MATERIAL:

NYLON 66 UL94V-0
NATURAL

FINISH: CLEAN

S/AREA:

mm²

TITLE:

1.25mm PITCH SIL
CRIMP MOULDING

DRAWING NUMBER:

M30-110XX00

SHT
2
OF
2