



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



PRODUCT DATA DRAWING

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	DCN 40314	01/14	STW

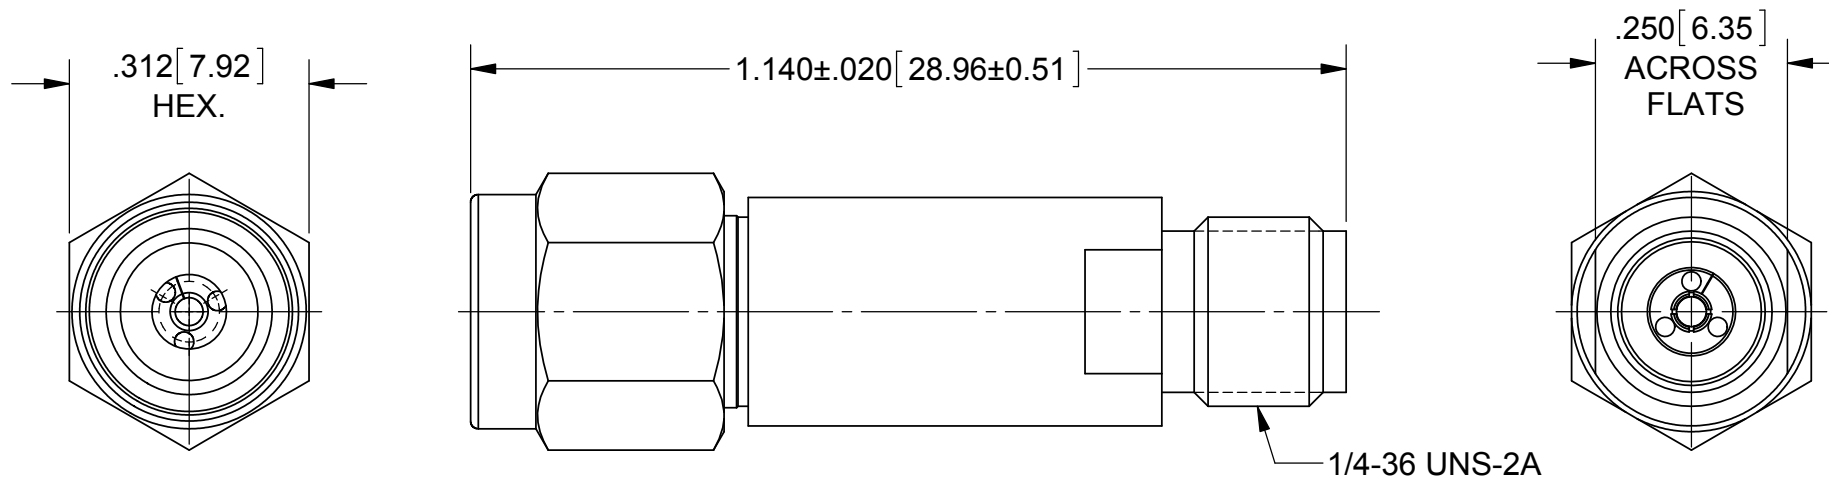


- MATERIAL:**
BODIES, INSERTS, & COUPLING NUT: STAINLESS STEEL PER AMS-5640, ALLOY UNS S30300, TYPE 1
- LOCK RING & CONTACTS:** BERYLLIUM COPPER PER ASTM B196, ALLOY No. UNS C17300, TD04
- SLEEVE:** BRASS PER ASTM B16, ALLOY UNS No. C36000
- BEADS:** POLYETHERMIDE PER ASTM D5205 "ULTEM 1000"
- BELLOWS SPRINGS:** ELECTRO-DEPOSITED GOLD OVER NICKEL
- GASKET:** SILICONE RUBBER PER A-A-59588, CLASS 2B, GRADE 50/60
- RESISTOR ELEMENT:** ALUMINUM NITRIDE SUBSTRATE WITH TANTALUM NITRIDE RESISTOR: GOLD PLATED TERMINATIONS
- FINISH:**
- BODIES, INSERTS, & COUPLING NUT:** PASSIVATED PER AMS-2700
- CONTACTS:** GOLD PER ASTM B488, TYPE I, CODE C, CLASS 1.27, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.
- SLEEVE:** GOLD PER ASTM B 488, TYPE II, CODE C, CLASS 1.27, OVER NICKEL PER AMS-QQ-N-290, CLASS 1, .00005" MIN.
- PERFORMANCE:**
- IMPEDANCE:** 50 OHMS
- FREQ. RANGE:** DC TO 32.0 GHz
- VSWR:** 1.25:1 MAX. DC TO 18 GHz
 1.30:1 MAX 18 TO 26.5 GHz
 1.35:1 MAX 26.5 TO 32 GHz
- OPERATING TEMP.:** -55 °C TO +125 °C
- AVG. POWER:** 2.0 WATT (POWER INPUT DERATED LINEARLY FROM 25 °C TO 0.5 WATTS AT 125 °C)
- PEAK POWER:** 500 WATTS (PEAK POWER FOR A DUTY CYCLE OF 5X10⁻⁴ MAXIMUM PULSE DURATION OF 5 MICROSECONDS)
- ENGAGEMENT/ DISENGAGEMENT:** 2 IN-LBS

MATERIAL: SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1'0" X'X' ±15'	UNLESS OTHERWISE SPECIFIED 1) ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA. 'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	SV Microwave, Inc. 2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409
FINISH: SEE NOTES	DECIMAL: X ±.030 .XX ±.010 .XXX ±.005	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	TITLE: SVK JACK TO PLUG DC-32.0 GHz ATTENUATOR
SURFACE AREA: N/A	THIRD ANGLE PROJECTION	DRAWN: JMC 12/09/13	SIZE: B CAGE CODE: 95077 DWG. NO: M3933/30-XX
PROPRIETARY THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.		CHECKED: STW 12/10/13 APPROVED: STW 12/10/13	SCALE: 4:1 SHEET 1 OF 2

ROHS COMPLIANT

REVISION HISTORY			
REV	DESCRIPTION	DATE	APPROVED
-	DCN 40314	01/14	STW

M3933/30-XX	dB VALUE	ATTENUATION ACCURACY (+/-)		
		DC-26.5 GHz	26.5-32.0 GHz	DC-32.0 GHz
01	0	-	-	0.5/0
02	0.5	-	-	0.5
03	1	-	-	0.5
04	1.5	-	-	0.5
05	2	-	-	0.5
06	2.5	-	-	0.5
07	3	-	-	0.5
08	3.5	-	-	0.5
09	4	-	-	0.5
10	4.5	-	-	0.5
11	5	-	-	0.5
12	5.5	-	-	0.5
13	6	-	-	0.5
14	6.5	-	-	0.5
15	7	-	-	0.5
16	7.5	-	-	0.5
17	8	-	-	0.5
18	8.5	-	-	0.5
19	9	-	-	0.5
20	9.5	-	-	0.5
21	10	-	-	0.5
22	10.5	-	-	0.5
23	11	-	-	0.5
24	11.5	-	-	0.5
25	12	-	-	0.5
26	13	0.8	1	-
27	14	0.8	1	-
28	15	0.8	1	-
29	16	0.8	1	-
30	17	0.8	1	-
31	18	0.8	1	-
32	19	0.8	1	-
33	20	0.8	1	-
34	25	1	1.5	-
35	30	1	1.5	-

MATERIAL: SEE NOTES	DIMENSIONS ARE IN INCHES TOLERANCES: FRACTIONAL: ±1/64 ANGULAR: X° ±1'0" X"X' ±15'	UNLESS OTHERWISE SPECIFIED 1) ALL DIMENSIONS ARE IN INCHES (MILLIMETERS) 2) ALL DIMENSIONS ARE AFTER PLATING. 3) BREAK CORNERS & EDGES .005 R. MAX. 4) CHAM. 1ST & LAST THREADS. 5) SURFACE ROUGHNESS 63-MIL-STD-10. 6) DIA. 'S ON COMMON CENTERS TO BE CONCENTRIC WITHIN .005 T.I.R. 7) REMOVE ALL BURRS	SV Microwave, Inc. 2400 Centrepark West Drive, Suite 100 West Palm Beach, FL 33409 TITLE: SVK JACK TO SVK PLUG DC-32 GHz ATTENUATOR
FINISH: SEE NOTES	DECIMAL: X ±.030 .XX ±.010 .XXX ±.005	INTERPRET DIMENSIONS AND TOLERANCES PER ASME Y14.5M - 1994	
SURFACE AREA: N/A	THIRD ANGLE PROJECTION	DRAWN: JMC 12/23/13	SIZE CAGE CODE DWG. NO. B 95077 M3933/30-XX
PROPRIETARY THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF SV MICROWAVE, INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF SV MICROWAVE, INC IS PROHIBITED.		CHECKED:	SCALE: 4:1
		APPROVED:	SHEET 2 OF 2