mail

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from, Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832 Email & Skype: info@chipsmall.com Web: www.chipsmall.com Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Greater Performance in Less Space







Boasting superior isolation, the M4L series of transformers provide more than 12mm creepage distance between the input and output windings. Constructed of materials to support up to 60°C ambient environments.


General Specifications

- Power 300, 450, 600 and 1000VA ratings
- Dielectric Strength 4.0Kv
- Available Input Voltage 100V, 105V, 115V, 125V, 200V, 210V, 215V, 230V, 250V 50/60Hz
 Output voltage 115V
- Touch-Safe terminals (IP20 type) offer a screw/binding clamp for hard wiring and a 3/16" & 1/4" Fast-On connection.
- Insulation System Class F (155°C) UL 1446 File # E66312
- Leakage Current agency tested @ <30 micro Amps
- Flame Rating UL 94-V0

Agency Certifications

•

- UL Standards UL 5085-1, UL 5085-2, UL 60601-1, UL 60950-1, UL 1097, UL 2097
- Meets UL 864, UL 913, UL 916, UL 924, UL 1012, UL 1069 & UL 1238
- CSA Standards 22.2 #66.1, File # 221070
- IEC / EN Standards IEC / EN 60950, (VDE License 1447)
- CE Compliance VDE Declaration of Conformity 73/23/EEC

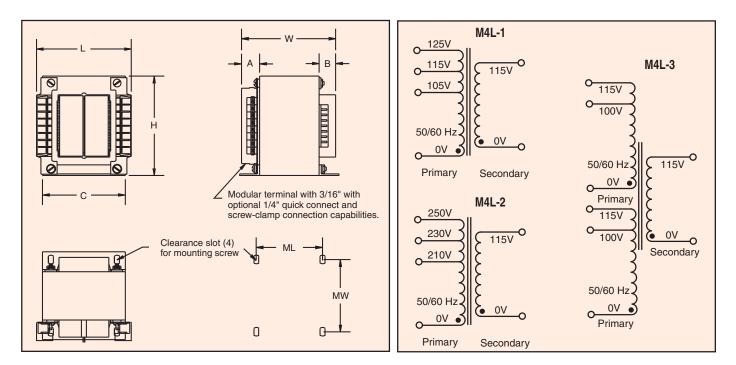

| Part Number | | | VA | Sec RMS | L | w | н | А | В | с | ML | MW | Mounting | Weight |
|-------------|----------|----------|------|-------------|------------------|------------------|-----------------|----------------|----------------|-----------------|----------------|-----------------|----------|----------------|
| | | | Size | Rating | Inches (mm) | | | | | | | | Screw | lbs (kg) |
| M4L-1-3 | M4L-2-3 | M4L-3-3 | 300 | 115V @ 2.6A | 4.20 (106.68) | 4.08 (103.51) | 3.75 (95.3) | 1.33 (33.8) | 0.62 (15.9) | 3.12 (79.4) | 2.50 (63.5) | 3.12 (79.4) | #10 | 7.0 (3.18) |
| M4L-1-4 | M4L-2-4 | M4L-3-4 | 450 | 115V @ 3.9A | 4.46 (113.28) | 4.33 (110) | 4.50 (114.3) | 1.33 (33.8) | 0.75 (19.1) | 3.75 (95.3) | 3.00 (76.2) | 3.25 (82.6) | #10 | 11.0 (5) |
| M4L-1-6 | M4L-2-6 | M4L-3-6 | 600 | 115V @ 5.2A | 4.46 (113.28) | 5.08 (129.03) | 4.50 (114.3) | 1.33 (33.8) | 0.75 (19.1) | 3.75 (95.3) | 3.00 (76.2) | 4.06 (103.2) | #10 | 14.3 (6.49) |
| M4L-1-10 | M4L-2-10 | M4L-3-10 | 1000 | 115V @ 8.7A | 4.89 (124.20) | 5.70 (144.78) | 5.25 (133.4) | 1.33 (33.8) | 0.87 (22.2) | 4.37 (111.1) | 3.50 (88.9) | 4.68 (119.1) | 1/4 | 22.0 (10.0) |

Custom versions available upon request.

©2015 Signal Transformer Inc. Specifications subject to change without notice. 07.15



500 Bayview Avenue, Inwood, NY 11096 Toll Free 866-239-5777 • Tel 516-239-5777 • Fax 516-239-7208 sales@signaltransformer.com • techhelp@signaltransformer.com