



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**Savvi™ Embedded Ceramic  
WLAN 802.11 a/b/g Antenna**  
2.4–2.5 and 4.9–5.8 GHz

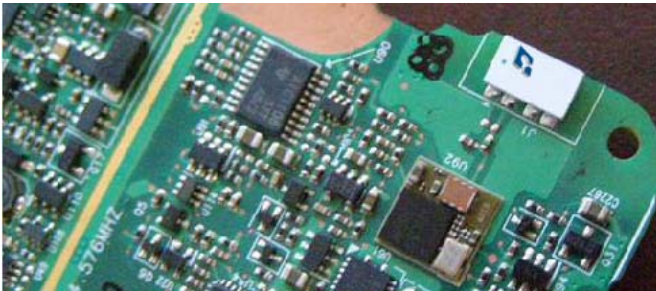


Ethertronics' Savvi series of Isolated Magnetic Dipole™ (IMD) antennas deliver on the key needs of device designers for higher functionality and performance in smaller/thinner designs. These innovative antennas provide compelling advantages for laptops, handheld PCs, industrial devices, or other WLAN enabled equipment.

**TECHNOLOGY ADVANTAGES**

**Real-World Performance and Implementation**

Ceramic antennas may look alike on the outside, but the important difference is inside. Other antennas may contain simple PiFA or monopole designs that interact with their surroundings, complicating layout or changing performance with use position. Ethertronics' antennas utilize patented IMD technology to deliver a unique size and performance combination.



**Stays in Tune**

High RF isolation means IMD antennas resist detuning regardless of usage position. And one standardized part can typically be placed in a variety of locations.

**Smallest Effective Size**


IMD antennas require a

smaller keep-out area for surrounding components, leading to a smaller effective size.

**High Performance**

IMD's high efficiency and simple design rules lower development risk and speed time-to-market without sacrificing performance. Plus, high RF selectivity eliminates the cost and space for band-pass circuitry.

More information is available on our Website at [www.ethertronics.com/resources/](http://www.ethertronics.com/resources/).

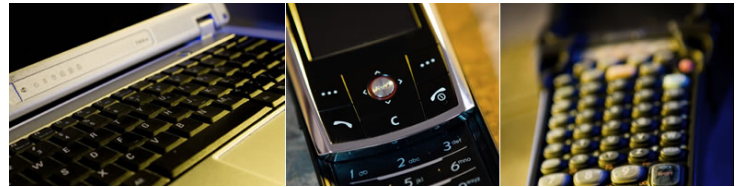

**KEY BENEFITS**

**DESIGN ADVANTAGES**

**Best in Class Performance—Smallest Occupied Volume**

- 81% peak efficiency
- Minimal ground clearance and component “keep out” areas. Very low component height.
- High selectivity eliminates the need for additional filters and frees board space.

**High Tolerance to Frequency Shifts**

- IMD's high RF isolation resists antenna de-tuning that can otherwise impair reception.
- Single part works for various PCB sizes and layouts.

**Quicker Time-to-Market**

- Fewer design changes
- Simpler implementation—no matching networks.

**RoHS Compliant**

- Antennas comply with appropriate RoHS Directives.

**END USER ADVANTAGES**

**Superior Range**

- Greater antenna efficiency means longer range.

**Exceptional Coverage**

- Better coverage means fewer or no dead spots, or slow speed connections, for a better end user experience.

**SERVICE AND SUPPORT**

**Extensive RF Experience**

- Our Savvi ceramic antennas are supported by extensive application notes, and when needed, by the expertise of RF engineers who have integrated hundreds of antenna designs into wireless devices.

**Global Operations & Design Support**

- Ethertronics' global operations encompass an integrated network of design centers that provide local customer support.

# PRODUCT: WLAN Antenna

**Ethertronics' Savvi™ WLAN Embedded Antenna Specifications**  
 Ethertronics produces a wide variety of standard and custom antennas to meet user needs.  
 Below are the typical specs for a WLAN application.

## Electrical Specifications


Typical Characteristics  
 (inside an enclosure)

WLAN a/b/g Antenna	2.4–2.5 GHz (b/g)	4.9–5.8 GHz (a)
Peak Gain	1.1 dBi	3.2 dBi
Average Efficiency	54%	69%
VSWR Match	2.6:1 max	3.0:1 max
Feed Point Impedance	50 Ω unbalanced	

## Mechanical Specifications

Size	8.00x3.00x1.33mm
Mounting	Surface mount
Weight	.2 grams
Packaging	Tape & Reel M830510: Minimum Order Quantity of 99,000 pcs. Order multiples of 4,500 pcs. M830510-1K: Minimum Order Quantity of 1,000 pcs. Order multiples of 1,000

## Typical Efficiency, Return Loss

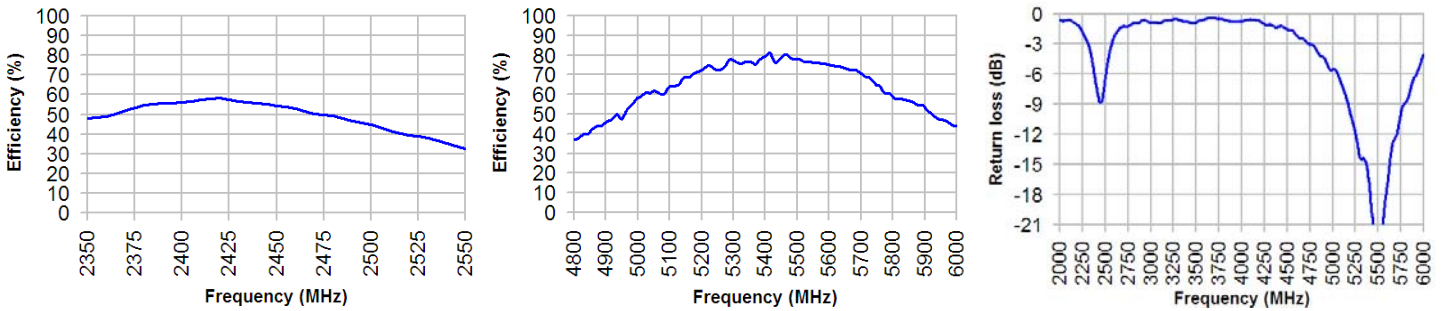

## Antenna Radiation Patterns

