



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Broadband CATV, Coupler 5-1000MHz


**MACP-008125-CK07F0
V1**

Features

- Surface Mount
- Typical Coupling 20dB
- RoHS* Compliant
- RoHS version of ELDC-20.
- 260°C Reflow Compatible
- Available on Tape and Reel.
- All wires are soldered to the substrate using HMP solder

Description

M/A-COM's MACP-008125-CK07F0 is a high performance 75 Ohm Coupler, in a SM-55 low cost, surface mount package. The MACP-008125-CK07F0 is designed for use in high volume CATV applications. Typical applications include Set-top Boxes, Network Interface Units, Broadband Amplifiers and Headend equipment.

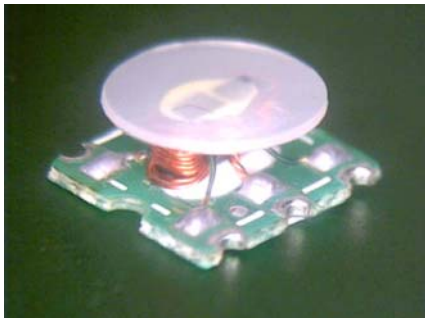


Pin Configuration


Pin No.	Function
1	Output
2	Ground, not connected
3	Isolated (external 75 Ohms termination)
4	Coupled
5	Ground
6	Input

Note: Reference Application Note **M513** for reel size information.

Schematic

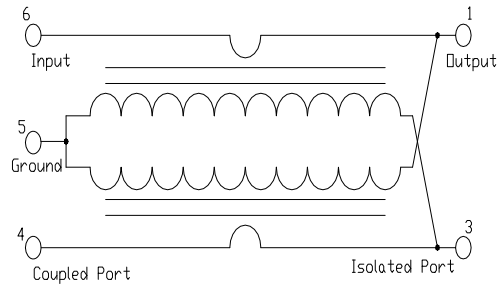

Case Style: SM-127

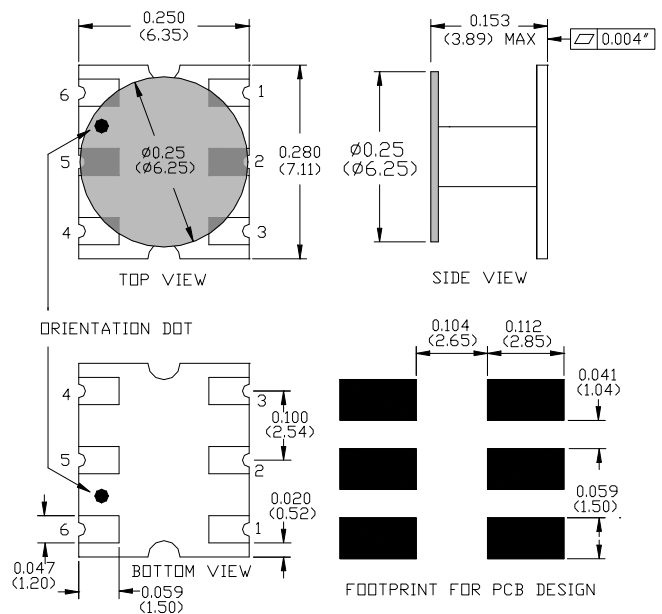

Dimensions in inches [mm] Tolerance: .xx ± .02, .xxx ± .010

Ordering Information

Part Number	Package
MACP-008125-CK07F0	900 piece reel
MACP-008125-CK07TB	Customer Test Board

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available.

* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
• **India** Tel: +91.80.4155721 • **China** Tel: +86.21.2407.1588

Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make (s) or information contained herein without notice.

Broadband CATV, Coupler 5-1000MHz

MACP-008125-CK07F0
V1


Electrical Specifications: $T_A = 25^\circ\text{C}$, $Z_0 = 75\Omega$ ¹

Parameter	Test Conditions	Units	Min	Typ	Max
Mainline Loss	5 - 50 MHz	dB	—	0.6	0.7
	50 - 870 MHz	dB	—	0.45	0.65
	870 - 1000 MHz	dB	—	0.6	0.7
Coupling	5 - 870 MHz	dB	—	20	± 0.8
	870 - 1000 MHz	dB	—	20	± 1.0
Coupling Flatness	5 - 1000 MHz	dB	—	—	± 0.5
Directivity	5 - 870 MHz	dB	10	14	—
	870 - 1000 MHz	dB	7	9	—
Input Return Loss	5 - 50 MHz	dB	20	22	—
	50 - 1000 MHz	dB	22	27	—
Output Return Loss	5 - 50 MHz	dB	20	22	—
	50 - 1000 MHz	dB	22	28	—
Coupled Return Loss	5 - 50 MHz	dB	20	22	—
	50 - 1000 MHz	dB	20	27	—

Absolute Maximum Ratings ^{1,2}

Parameter	Absolute Maximum
Max Input Power	250mW
DC current	30mA
Operating Temperature	-40°C to +85°C
Storage Temperature	-55°C to +100°C

Recommended PCB Configuration



FOOTPRINT FOR PCB DESIGN

1. Exceeding any one or combination of these limits may cause permanent damage to this device.
2. M/A-COM does not recommend sustained operation near these survivability limits.

2

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.

PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
• **India** Tel: +91.80.4155721 • **China** Tel: +86.21.2407.1588

Visit www.macomtech.com for additional data sheets and product information.


M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

Broadband CATV, Coupler 5-1000MHz


MACP-008125-CK07F0
V1

Typical Performance Curves $T_A = 25^\circ\text{C}$, $Z_0 = 75\Omega$


Main Line Loss

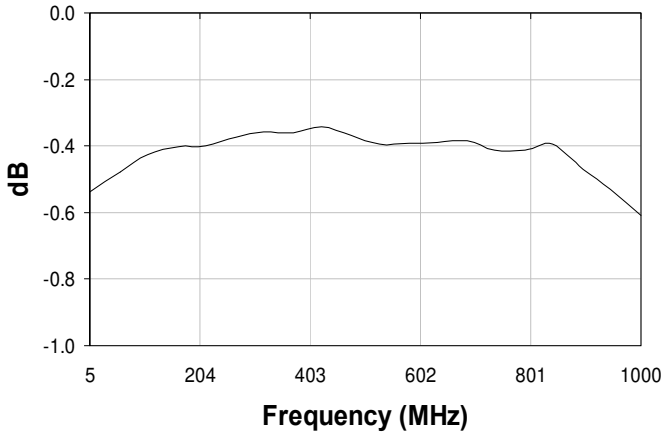


Return Loss: Input

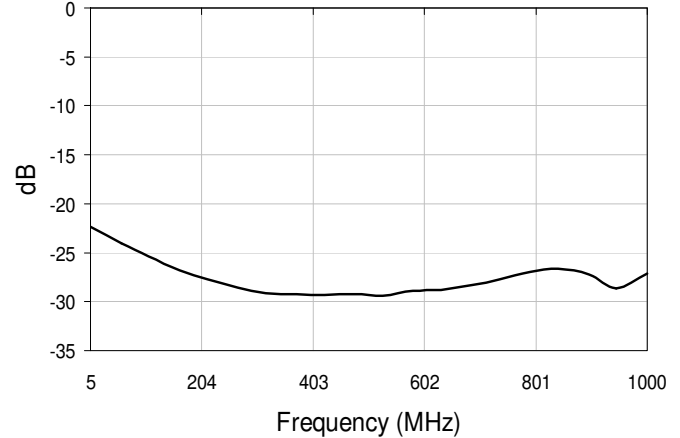


Coupling

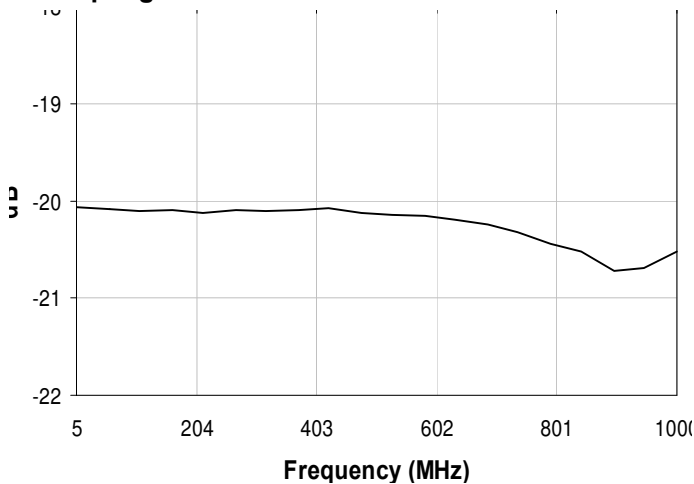


Return Loss: Output

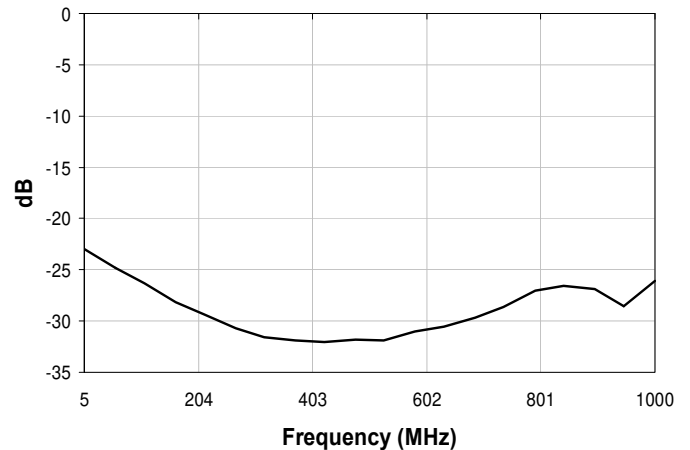

Directivity

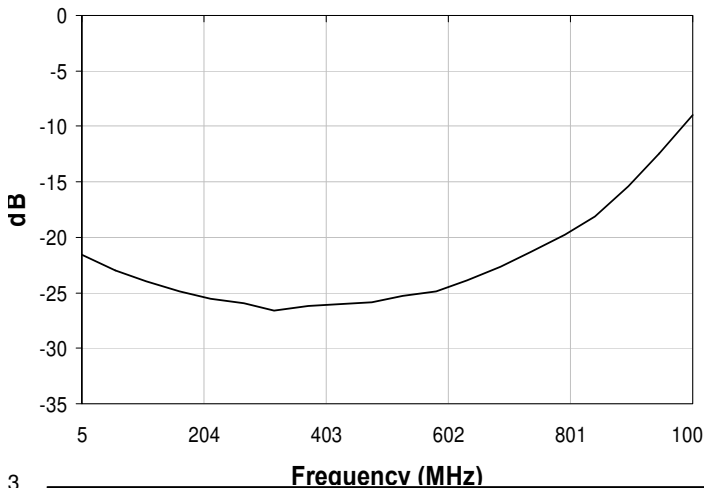

Return Loss: Coupled

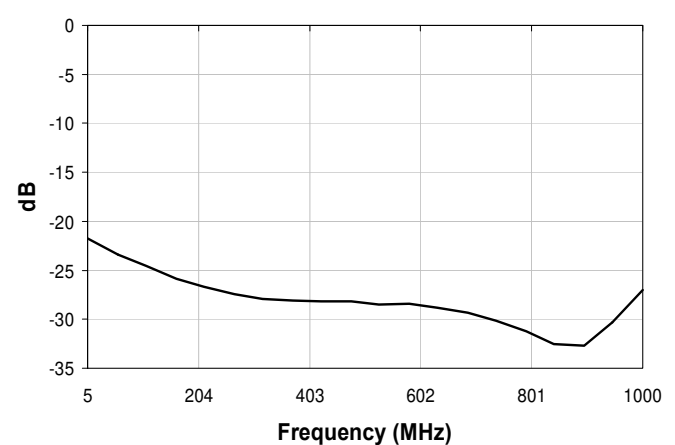

3

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• North America Tel: 800.366.2266 • Europe Tel: +353.21.244.6400
 • India Tel: +91.80.4155721 • China Tel: +86.21.2407.1588

Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.