



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



# MAGX-001214-250L00



## GaN on SiC HEMT Pulsed Power Transistor 250 W Peak, 1200-1400 MHz, 300 $\mu$ s Pulse, 10% Duty

Rev. V3

### Features

- GaN on SiC Depletion-Mode Transistor Technology
- Internally Matched
- Common-Source Configuration
- Broadband Class AB Operation
- RoHS\* Compliant and 260 °C Reflow Compatible
- +50 V Typical Operation
- MTTF = 600 years ( $T_J < 200$  °C)



### Applications

- L-Band pulsed radar

### Description

The MAGX-001214-250L00 is a gold metalized matched Gallium Nitride (GaN) on Silicon Carbide RF power transistor optimized for pulsed L-Band radar applications. Using state of the art wafer fabrication processes, these high performance transistors provide high gain, efficiency, bandwidth, ruggedness over a wide bandwidth for today's demanding application needs. High breakdown voltages allow for reliable and stable operation in extreme mismatched load conditions unparalleled with older semiconductor technologies.

### Ordering Information

Part Number	Description
MAGX-001214-250L00	250W GaN Power Transistor
MAGX-001214-SB1PPR	Evaluation Test Fixture

### Typical RF Performance under Standard Operating Conditions, $P_{OUT} = 250$ W (Peak)

Freq (MHz)	$P_{IN}$ (W)	Gain (dB)	$I_D$ (A)	Eff. (%)	RL (dB)	Droop (dB)	VSWR-S (5:1)	VSWR-T (10:1)
1200	4.4	17.6	8.0	62.2	-13.3	0.4	S	P
1250	4.0	18.0	8.2	60.4	-19.2	0.5	S	P
1300	4.1	17.8	8.7	57.1	-22.6	0.6	S	P
1350	4.4	17.5	9.1	54.6	-19.2	0.7	S	P
1400	4.4	17.6	9.0	55.0	-19.8	0.6	S	P

\* Restrictions on Hazardous Substances, European Union Directive 2002/95/EC.

**GaN on SiC HEMT Pulsed Power Transistor**  
**250 W Peak, 1200-1400 MHz, 300  $\mu$ s Pulse, 10% Duty**

Rev. V3

**Electrical Specifications: Freq. = 1200 - 1400 MHz,  $T_A = 25^\circ\text{C}$**

Parameter	Test Conditions	Symbol	Min.	Typ.	Max.	Units
<b>RF Functional Tests</b>						
Peak Input Power	$V_{DD} = 50\text{ V}$ , $I_{DQ} = 250\text{ mA}$ , Pulse Width = 300 $\mu$ s, Duty Cycle = 10%, $P_{OUT} = 250\text{ W Peak (25 W avg.)}$	$P_{IN}$	-	4.2	5.6	W
Power Gain		$G_P$	16.5	17.7	-	dB
Drain Efficiency		$\eta_D$	50	57.9	-	%
Load Mismatch Stability		VSWR-S	5:1	-	-	-
Load Mismatch Tolerance		VSWR-T	10:1	-	-	-

**Electrical Characteristics:  $T_A = 25^\circ\text{C}$**

Parameter	Test Conditions	Symbol	Min.	Typ.	Max.	Units
<b>DC Characteristics</b>						
Drain-Source Leakage Current	$V_{GS} = -8\text{ V}$ , $V_{DS} = 175\text{ V}$	$I_{DS}$	-	0.4	12	mA
Gate Threshold Voltage	$V_{DS} = 5\text{ V}$ , $I_D = 30\text{ mA}$	$V_{GS(TH)}$	-5	-3.1	-2	V
Forward Transconductance	$V_{DS} = 5\text{ V}$ , $I_D = 7\text{ mA}$	$G_M$	5.0	7.7	-	S
<b>Dynamic Characteristics</b>						
Input Capacitance	Not applicable - Input matched	$C_{ISS}$	N/A	N/A	N/A	pF
Output Capacitance	$V_{DS} = 50\text{ V}$ , $V_{GS} = -8\text{ V}$ , Freq. = 1 MHz	$C_{OSS}$	-	22	-	pF
Reverse Transfer Capacitance		$C_{RSS}$	-	2.2	-	pF



## GaN on SiC HEMT Pulsed Power Transistor 250 W Peak, 1200-1400 MHz, 300 $\mu$ s Pulse, 10% Duty

Rev. V3

### Absolute Maximum Ratings<sup>1,2,3</sup>

Parameter	Limit
Drain Voltage ( $V_{DD}$ )	+65 V
Gate Voltage ( $V_{GG}$ )	-8 to -2 V
Drain Current ( $I_{DD}$ )	10.7 A
Input Power <sup>4</sup> ( $P_{IN}$ )	$P_{IN}$ (nominal) + 3 dB
Operating Junction Temperature <sup>5</sup>	250 °C
Peak Pulsed Power Dissipation at 85 °C	292 W
Operating Temperature Range	-40 to +95 °C
Storage Temperature Range	-65 to +150 °C
ESD Maximum - Machine Model (MM)	50V
ESD Maximum - Human Body Model (HBM)	250V

- Exceeding any one or combination of these limits may cause permanent damage to this device.
- MACOM does not recommend sustained operation near these survivability limits.
- For saturated performance it is recommended that the sum of  $(3 * V_{DD} + |V_{GG}|) < 175$  V.
- Input Power Limit is +3 dB over nominal drive required to achieve  $P_{OUT} = 250$  W.
- Operating junction temperature is measured with infrared (IR) microscope. Junction temperature directly affects a device's MTTF and should be kept as low as possible to maximize lifetime.
  - MTTF =  $5.3 \times 10^6$  hours ( $T_J < 200$  °C)
  - MTTF =  $6.8 \times 10^4$  hours ( $T_J < 250$  °C)


### Thermal Characteristics

Parameter	Test Conditions	Symbol	Typical	Units
Thermal Resistance	$T_C = 70$ °C, $V_{DD} = 50$ V, $I_{DQ} = 250$ mA, $P_{OUT} = 250$ W, Pulse Width = 300 $\mu$ s, Duty Cycle = 10%	$\Theta_{JC}$	0.6	°C/W

## GaN on SiC HEMT Pulsed Power Transistor 250 W Peak, 1200-1400 MHz, 300 $\mu$ s Pulse, 10% Duty

Rev. V3

### Test Fixture Assembly

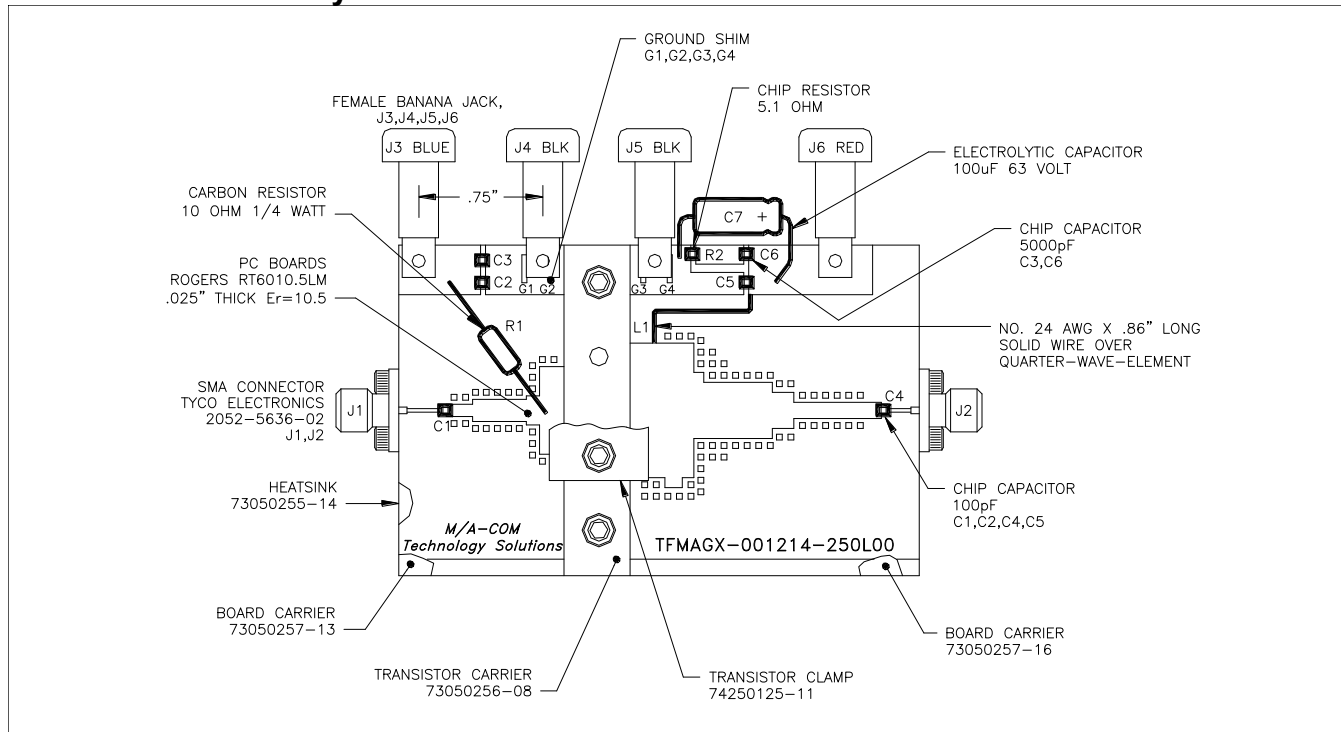

Contact MACOM for additional circuit information.

### Test Fixture Impedances

F (MHz)	Z <sub>IF</sub> ( $\Omega$ )	Z <sub>OF</sub> ( $\Omega$ )
1200	3.6 - j5.3	3.5 + j0.7
1250	3.3 - j4.9	3.7 + j0.2
1300	3.2 - j4.4	3.5 - j0.3
1350	3.2 - j4.0	3.2 - j0.6
1400	3.2 - j3.6	2.7 - j0.7


### Correct Device Sequencing

#### Turning the device ON

1. Set  $V_{GS}$  to the pinch-off ( $V_P$ ), typically -5 V.
2. Turn on  $V_{DS}$  to nominal voltage (50 V).
3. Increase  $V_{GS}$  until the  $I_{DS}$  current is reached.
4. Apply RF power to desired level.

#### Turning the device OFF


1. Turn the RF power off.
2. Decrease  $V_{GS}$  down to  $V_P$ .
3. Decrease  $V_{DS}$  down to 0 V.
4. Turn off  $V_{GS}$

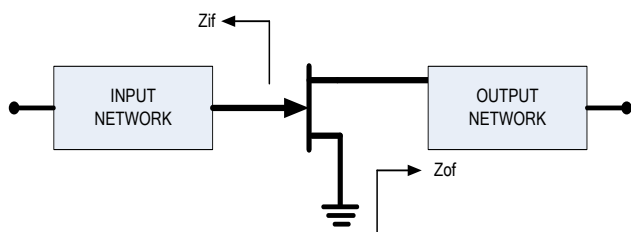


GaN on SiC HEMT Pulsed Power Transistor  
250 W Peak, 1200-1400 MHz, 300  $\mu$ s Pulse, 10% Duty

Rev. V3

## RF Power Transfer Curve (Output Power Vs. Input Power)

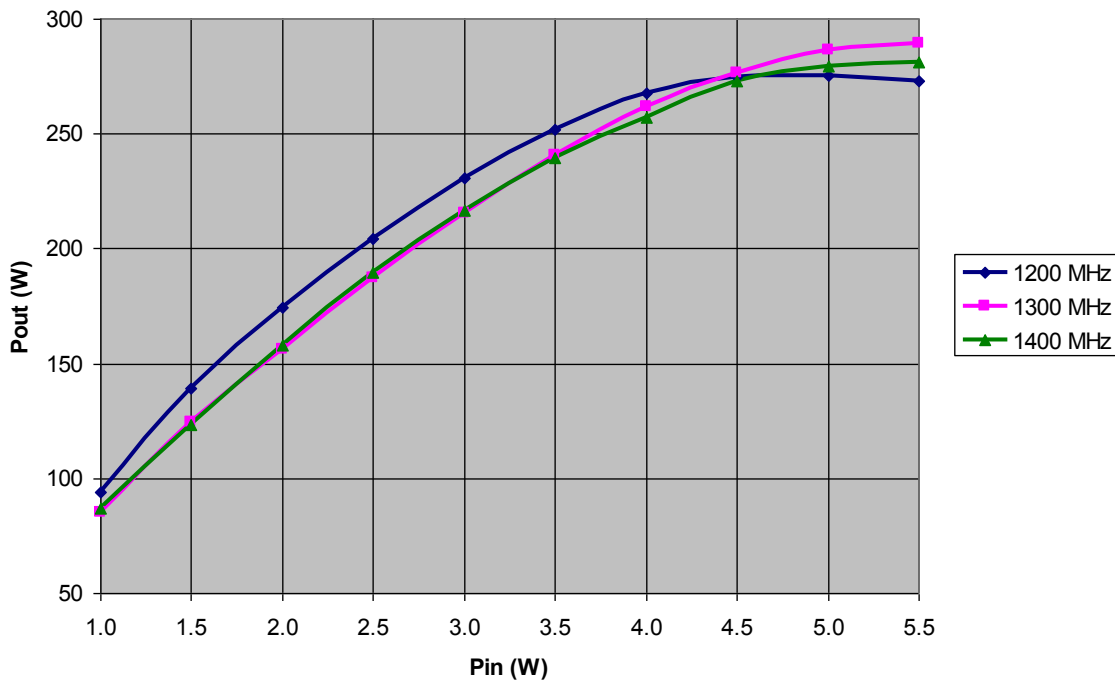

## RF Power Transfer Curve (Drain Efficiency Vs. Output Power)

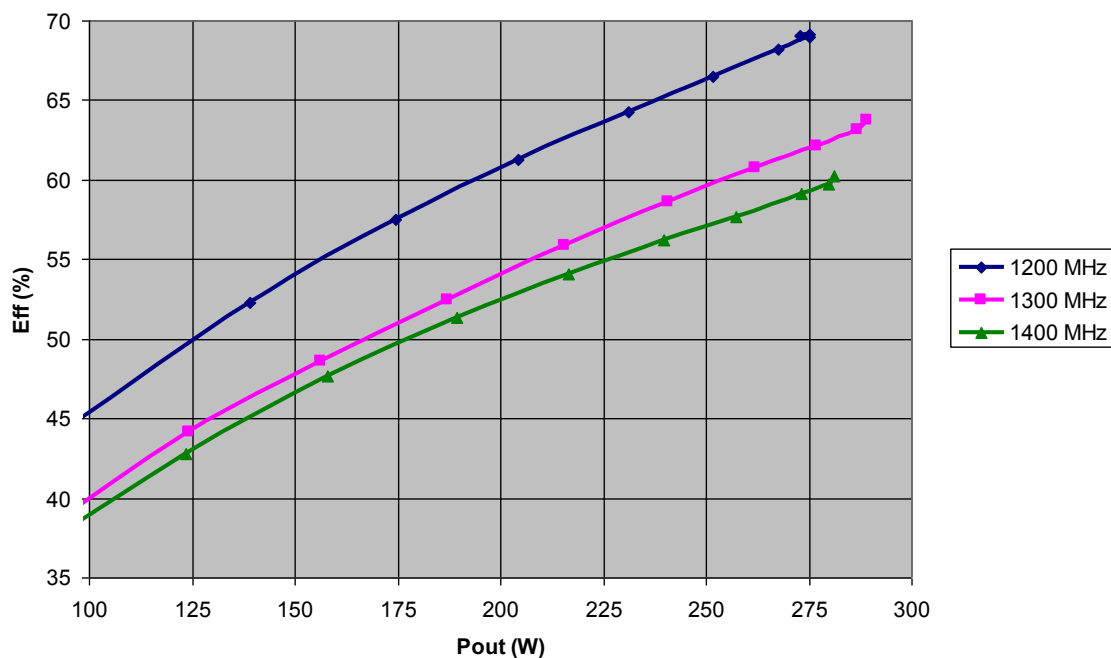


# MAGX-001214-250L00



GaN on SiC HEMT Pulsed Power Transistor  
250 W Peak, 1200-1400 MHz, 300  $\mu$ s Pulse, 10% Duty

Rev. V3

## Outline Drawing†

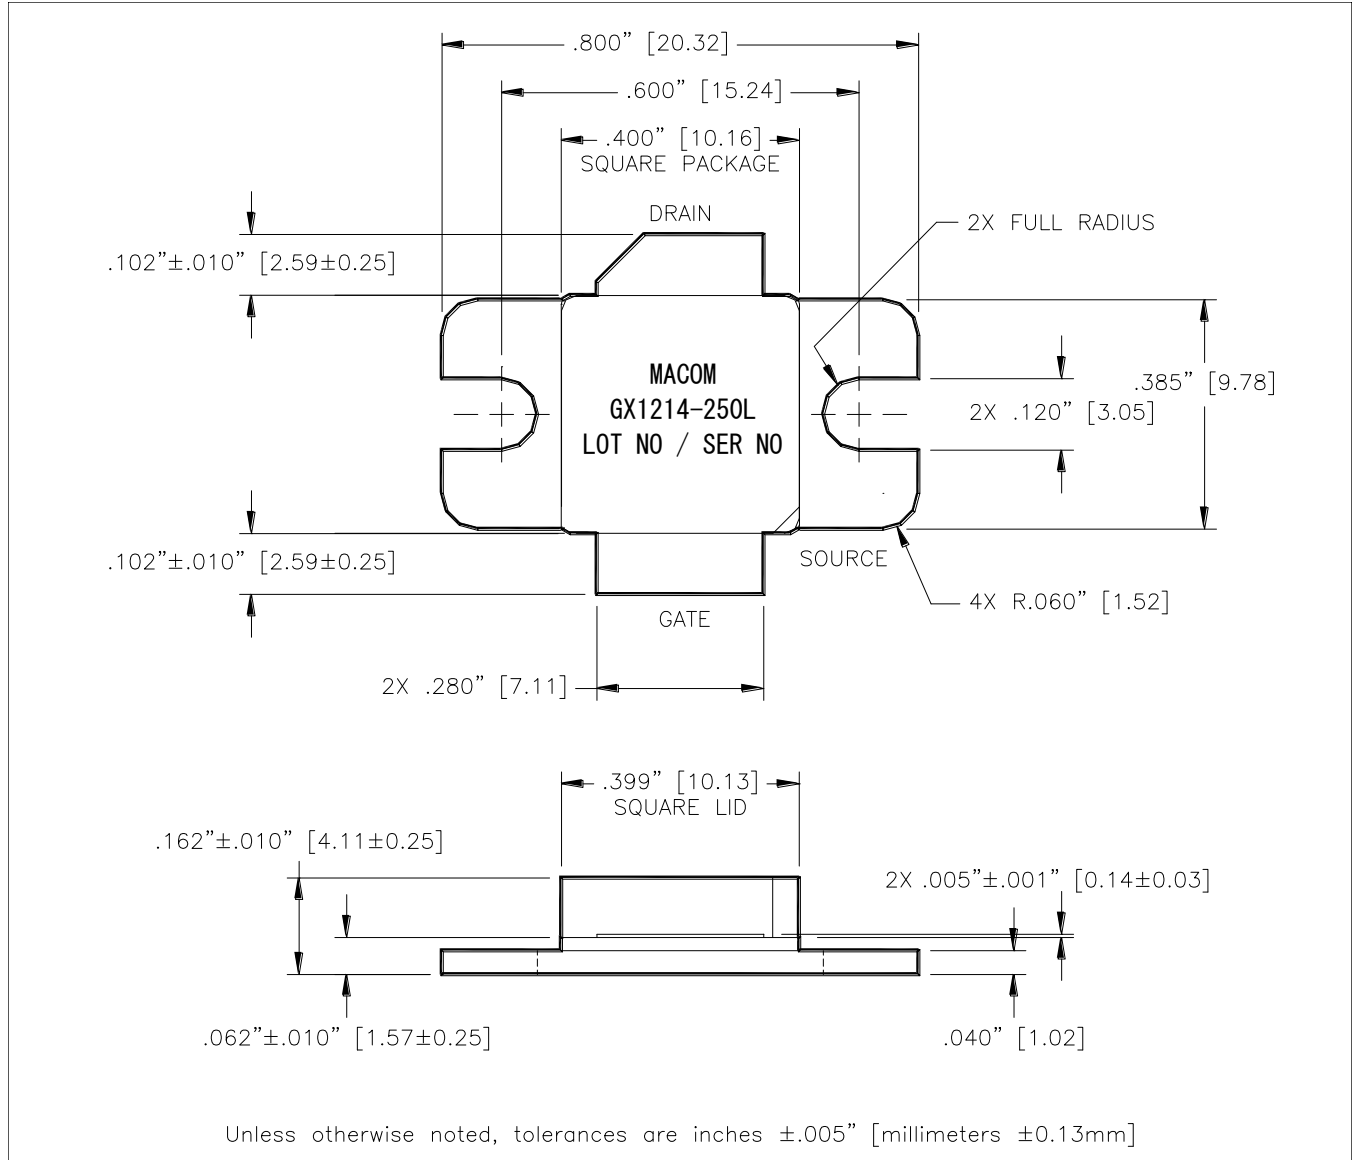

† Reference Application Note AN3025 for mounting/soldering recommendations.  
Meets JEDEC moisture sensitivity level 1 requirements.  
Plating is Ni/Au.

M/A-COM Technology Solutions Inc. All rights reserved.

Information in this document is provided in connection with M/A-COM Technology Solutions Inc ("MACOM") products. These materials are provided by MACOM as a service to its customers and may be used for informational purposes only. Except as provided in MACOM's Terms and Conditions of Sale for such products or in any separate agreement related to this document, MACOM assumes no liability whatsoever. MACOM assumes no responsibility for errors or omissions in these materials. MACOM may make changes to specifications and product descriptions at any time, without notice. MACOM makes no commitment to update the information and shall have no responsibility whatsoever for conflicts or incompatibilities arising from future changes to its specifications and product descriptions. No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document.

THESE MATERIALS ARE PROVIDED "AS IS" WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, RELATING TO SALE AND/OR USE OF MACOM PRODUCTS INCLUDING LIABILITY OR WARRANTIES RELATING TO FITNESS FOR A PARTICULAR PURPOSE, CONSEQUENTIAL OR INCIDENTAL DAMAGES, MERCHANTABILITY, OR INFRINGEMENT OF ANY PATENT, COPYRIGHT OR OTHER INTELLECTUAL PROPERTY RIGHT. MACOM FURTHER DOES NOT WARRANT THE ACCURACY OR COMPLETENESS OF THE INFORMATION, TEXT, GRAPHICS OR OTHER ITEMS CONTAINED WITHIN THESE MATERIALS. MACOM SHALL NOT BE LIABLE FOR ANY SPECIAL, INDIRECT, INCIDENTAL, OR CONSEQUENTIAL DAMAGES, INCLUDING WITHOUT LIMITATION, LOST REVENUES OR LOST PROFITS, WHICH MAY RESULT FROM THE USE OF THESE MATERIALS.

MACOM products are not intended for use in medical, lifesaving or life sustaining applications. MACOM customers using or selling MACOM products for use in such applications do so at their own risk and agree to fully indemnify MACOM for any damages resulting from such improper use or sale.