



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Aluminum Electrolytic Capacitors SMD (Chip) Long Life Vertical

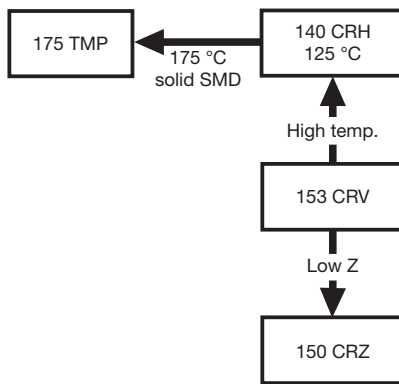


Fig. 1

| QUICK REFERENCE DATA                          |                                 |
|---|---------------------------------|
| DESCRIPTION                                   | VALUE                           |
| Nominal case sizes (L x W x H in mm)          | 4.0 x 4.0 x 5.3 to 10 x 10 x 14 |
| Rated capacitance range, $C_R$                | 0.47 $\mu$ F to 1000 $\mu$ F    |
| Tolerance on $C_R$                            | $\pm 20\%$                      |
| Rated voltage range, $U_R$                    | 6.3 V to 100 V                  |
| Category temperature range                    | -55 °C to +105 °C               |
| Endurance test at 105 °C:                     |                                 |
| Case sizes 4.0 x 4.0 x 5.3 to 6.3 x 6.3 x 5.3 | 1000 h                          |
| Case sizes 8.0 x 8.0 x 6.5 to 10 x 10 x 14    | 2000 h                          |
| Useful life at 105 °C:                        |                                 |
| Case sizes 4.0 x 4.0 x 5.3 to 6.3 x 6.3 x 5.3 | 2000 h                          |
| Case sizes 8.0 x 8.0 x 6.5 to 10 x 10 x 14    | 3000 h                          |
| Useful life at 40 °C; 1.3 x $I_R$ applied:    |                                 |
| Case sizes 4.0 x 4.0 x 5.3 to 6.3 x 6.3 x 5.3 | 200 000 h                       |
| Case sizes 8.0 x 8.0 x 6.5 to 10 x 10 x 14    | 300 000 h                       |
| Shelf life at 0 V, 105 °C                     | 1000 h                          |
| Based on sectional specification              | IEC 60384-18 / CECC 32300       |
| Climatic category IEC 60068                   | 55 / 105 / 56                   |

### FEATURES

- Polarized aluminum electrolytic capacitors, non-solid electrolyte, self healing
- SMD-version with base plate, vertical construction requiring minimum board space, lead (Pb)-free reflow solderable
- High CV per unit volume
- Long useful life: 2000 h to 3000 h at 105 °C
- Charge and discharge proof, no peak current limitation
- Supplied in blister tape on reel
- ATTENTION: for maximum safe soldering conditions refer to Fig. 4
- Material categorization: for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)



### APPLICATIONS

- SMD technology, in compliance with RoHS
- Coupling, decoupling, smoothing, filtering, buffering, timing
- Telecommunications, general industrial, EDP, automotive, portable and lightweight equipment

### MARKING

- Rated capacitance (in  $\mu$ F)
- Rated voltage (in V)
- Date code
- Black mark or “-” sign indicating the cathode (the anode is identified by bevelled edges)

### PACKAGING

Supplied in blister tape on reel



| SELECTION CHART FOR C <sub>R</sub> , U <sub>R</sub> , AND RELEVANT NOMINAL CASE SIZES (L x W x H in mm) |                    |                 |                 |                 |                 |                 |              |              |
|---|--------------------|-----------------|-----------------|-----------------|-----------------|-----------------|--------------|--------------|
| C <sub>R</sub><br>(μF)  | U <sub>R</sub> (V) |                 |                 |                 |                 |                 |              |              |
|   | 6.3                | 10              | 16              | 25              | 35              | 50              | 63           | 100          |
| 0.47  | -                  | -               | -               | -               | -               | 4.0 x 4.0 x 5.3 | -            | -            |
| 1.0   | -                  | -               | -               | -               | -               | 4.0 x 4.0 x 5.3 | -            | -            |
| 2.2   | -                  | -               | -               | -               | -               | 4.0 x 4.0 x 5.3 | -            | -            |
| 3.3   | -                  | -               | -               | -               | -               | 4.0 x 4.0 x 5.3 | -            | -            |
| 4.7   | -                  | -               | -               | -               | 4.0 x 4.0 x 5.3 | 5.0 x 5.0 x 5.3 | -            | -            |
| 10  | -                  | -               | 4.0 x 4.0 x 5.3 | -               | 5.0 x 5.0 x 5.3 | 6.3 x 6.3 x 5.3 | -            | -            |
| 22  | 4.0 x 4.0 x 5.3    | -               | 5.0 x 5.0 x 5.3 | -               | 6.3 x 6.3 x 5.3 | 8.0 x 8.0 x 6.5 | -            | -            |
| 33  | -                  | 5.0 x 5.0 x 5.3 | -               | 6.3 x 6.3 x 5.3 | 8.0 x 8.0 x 6.5 | 8.0 x 8.0 x 10  | -            | 10 x 10 x 14 |
| 47  | 5.0 x 5.0 x 5.3    | -               | 6.3 x 6.3 x 5.3 | 8.0 x 8.0 x 6.5 | -               | 8.0 x 8.0 x 10  | -            | -            |
| 100   | 6.3 x 6.3 x 5.3    | -               | 8.0 x 8.0 x 6.5 | 8.0 x 8.0 x 10  | -               | 10 x 10 x 10    | 10 x 10 x 14 | -            |
|   | -                  | -               | -               | -               | -               | -               | -            | -            |
| 220   | -                  | 8.0 x 8.0 x 10  | 10 x 10 x 10    | -               | -               | -               | -            | -            |
| 330   | 8.0 x 8.0 x 10     | 10 x 10 x 10    | -               | 10 x 10 x 14    | -               | -               | -            | -            |
| 470   | 10 x 10 x 10       | -               | 10 x 10 x 14    | -               | -               | -               | -            | -            |
| 680   | -                  | 10 x 10 x 14    | -               | -               | -               | -               | -            | -            |
| 1000  | 10 x 10 x 14       | -               | -               | -               | -               | -               | -            | -            |

Table 1

| TAPE AND REEL DIMENSIONS in millimeters AND PACKAGING QUANTITIES |                         |                 |                                  |                  |                                   |
|--|-------------------------|-----------------|----------------------------------|------------------|-----------------------------------|
| CASE CODE  | PITCH<br>P <sub>1</sub> | TAPE WIDTH<br>W | TAPE THICKNESS<br>T <sub>2</sub> | REEL<br>DIAMETER | PACKAGING<br>QUANTITY<br>PER REEL |
| 0405   | 8                       | 12              | 5.8                              | 380              | 2000                              |
| 0505   | 12                      | 12              | 5.8                              | 380              | 1000                              |
| 0605   | 12                      | 16              | 5.8                              | 380              | 1000                              |
| 0807   | 12                      | 16              | 6.8                              | 380              | 1000                              |
| 0810   | 16                      | 24              | 11.3                             | 380              | 500                               |
| 1010   | 16                      | 24              | 11.3                             | 380              | 500                               |
| 1014   | 16                      | 24              | 14.8                             | 330              | 250                               |

Note

- Detailed tape dimensions see section "PACKAGING".



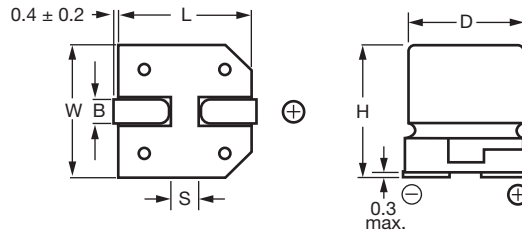


Fig. 2 - Dimensional outline

Table 2

| DIMENSIONS in millimeters AND MASS |           |                   |                   |                   |      |                   |     |             |
|------------------------------------|-----------|-------------------|-------------------|-------------------|------|-------------------|-----|-------------|
| NOMINAL CASE SIZE<br>L x W x H     | CASE CODE | L <sub>max.</sub> | W <sub>max.</sub> | H <sub>max.</sub> | Ø D  | B <sub>max.</sub> | S   | MASS<br>(g) |
| 4.0 x 4.0 x 5.3                    | 0405      | 4.5               | 4.5               | 5.5               | 4.0  | 0.8               | 1.0 | ≈ 0.13      |
| 5.0 x 5.0 x 5.3                    | 0505      | 5.5               | 5.5               | 5.5               | 5.0  | 0.8               | 1.4 | ≈ 0.20      |
| 6.3 x 6.3 x 5.3                    | 0605      | 6.8               | 6.8               | 5.5               | 6.3  | 0.8               | 2.0 | ≈ 0.30      |
| 8.0 x 8.0 x 6.5                    | 0807      | 8.6               | 8.6               | 6.8               | 8.0  | 0.8               | 2.3 | ≈ 0.50      |
| 8.0 x 8.0 x 10                     | 0810      | 8.6               | 8.6               | 10.5              | 8.0  | 1.1               | 3.1 | ≈ 1.00      |
| 10 x 10 x 10                       | 1010      | 10.6              | 10.6              | 10.5              | 10.0 | 1.1               | 4.7 | ≈ 1.30      |
| 10 x 10 x 14                       | 1014      | 10.6              | 10.6              | 14.3              | 10.0 | 1.2               | 4.5 | ≈ 1.50      |

### MOUNTING

The capacitors are designed for automatic placement on to printed-circuit boards.

Optimum dimensions of soldering pads depend amongst others on soldering method, mounting accuracy, print layout and / or adjacent components.

For recommended soldering pad dimensions, refer to Fig. 3 and Table 3.

### SOLDERING

Soldering conditions are defined by the curve, temperature versus time, where the temperature is that measured on the soldering pad and on top of the case during processing.

For maximum conditions refer to Fig. 4.

Maximum 2 runs with pause of minimum 30 min between.

Any temperature versus time curve which does not exceed the specified maximum curves may be applied.

AS A GENERAL PRINCIPLE, TEMPERATURE AND DURATION SHALL BE THE **MINIMUM** NECESSARY REQUIRED TO ENSURE GOOD SOLDERING CONNECTIONS. HOWEVER, THE SPECIFIED MAXIMUM CURVES SHOULD NEVER BE EXCEEDED.




Fig. 3 - Recommended soldering pad dimensions

Table 3

| RECOMMENDED SOLDERING PAD DIMENSIONS in millimeters |     |     |     |
|---|-----|-----|-----|
| CASE CODE   | a   | b   | c   |
| 0405  | 2.6 | 1.6 | 1.0 |
| 0505  | 3.0 | 1.6 | 1.4 |
| 0605  | 3.5 | 1.6 | 1.9 |
| 0807  | 4.0 | 1.6 | 2.1 |
| 0810  | 3.5 | 2.5 | 3.0 |
| 1010  | 4.0 | 2.5 | 4.0 |
| 1014  | 4.3 | 2.5 | 4.0 |

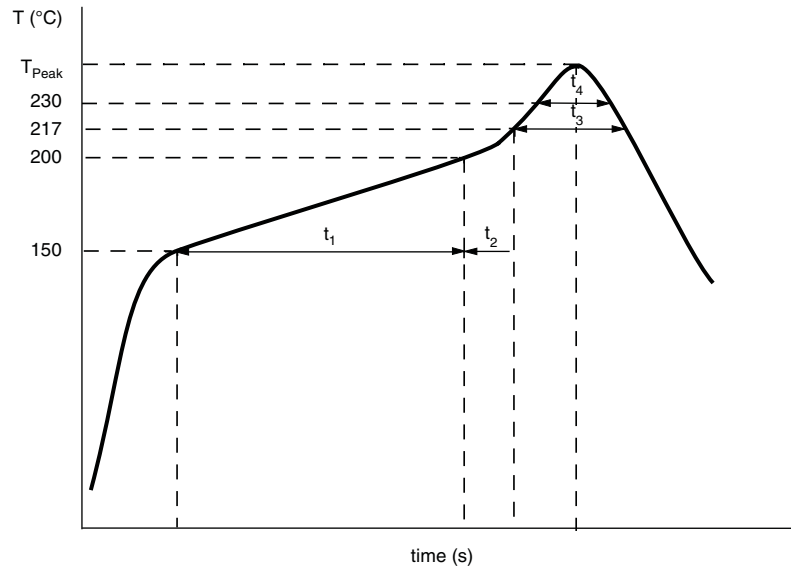


Fig. 4 - Maximum temperature load during reflow soldering measured on capacitors soldering pad and top of the case

| REFLOW SOLDERING CONDITIONS                        |                        |                        |                       |                      |
|--|------------------------|------------------------|-----------------------|----------------------|
| PROFILE FEATURES                                   | CASE CODE 0405 TO 0605 | CASE CODE 0807 TO 1010 | CASE CODE 1014 ≤ 63 V | CASE CODE 1014 100 V |
| Max. time from 25 °C to $T_{peak}$                 | 240 s                  | 240 s                  | 300 s                 | 270 s                |
| Max. ramp-up rate to 150 °C                        | 3 K/s                  | 3 K/s                  | 3 K/s                 | 3 K/s                |
| Max. time from 150 °C to 200 °C ( $t_1$ )          | 120 s                  | 120 s                  | 150 s                 | 120 s                |
| Ramp up rate from 200 °C to $T_{peak}$             | 0.5 K/s to 3 K/s       | 0.5 K/s to 3 K/s       | 0.5 K/s to 3 K/s      | 0.5 K/s to 3 K/s     |
| Max. time from 200 °C to 217 °C, ( $t_2$ )         | 20 s                   | 20 s                   | 60 s                  | 60 s                 |
| Max. time above $T_{Liquidus}$ (217 °C), ( $t_3$ ) | 60 s                   | 60 s                   | 90 s                  | 60 s                 |
| Max. time above 230 °C ( $t_4$ )                   | 30 s                   | 20 s                   | 40 s                  | 30 s                 |
| Peak temperature $T_{peak}$                        | 250 °C                 | 240 °C                 | 250 °C                | 240 °C               |
| Max. time above $T_{peak}$ minus 5 °C              | 5 s                    | 5 s                    | 5 s                   | 10 s                 |
| Max. ramp-down rate from $T_{Liquidus}$            | 6 K/s                  | 6 K/s                  | 6 K/s                 | 6 K/s                |

**Note**

- Temperature measuring point on top of the case and terminals max. 2 runs with pause of 30 min in between



| ELECTRICAL DATA |   |
|-----------------|---|
| SYMBOL          | DESCRIPTION   |
| $C_R$           | Rated capacitance at 100 Hz or 120 Hz, tolerance $\pm 20\%$ |
| $I_R$           | Rated RMS ripple current at 100 Hz or 120 Hz, 105 °C        |
| $I_{L2}$        | Max. leakage current after 2 min at $U_R$                   |
| $\tan \delta$   | Max. dissipation factor at 100 Hz or 120 Hz                 |
| ESR             | Equivalent series resistance at 100 kHz                     |

**ORDERING EXAMPLE**

Electrolytic capacitor 153 CRV series

100  $\mu$ F / 25 V;  $\pm 20\%$

Nominal case size: 8 mm x 8 mm x 10 mm; taped on reel

Ordering code: MAL215376101E3

Former 12NC: 2222 153 76101

**Note**

- Unless otherwise specified, all electrical values in Table 4 apply at  $T_{amb} = 20\text{ °C}$ ,  $P = 86\text{ kPa}$  to  $106\text{ kPa}$ ,  $RH = 45\%$  to  $75\%$ .

**Table 4**

| ELECTRICAL DATA AND ORDERING INFORMATION |                     |  |                         |                                 |                         |                                |                               |
|--|---------------------|--|-------------------------|---------------------------------|-------------------------|--------------------------------|-------------------------------|
| $U_R$<br>(V)                             | $C_R$<br>( $\mu$ F) | NOMINAL<br>CASE SIZE<br>L x W x H (mm) | $I_R$<br>105 °C<br>(mA) | $I_{L2}$<br>2 min<br>( $\mu$ A) | $\tan \delta$<br>100 Hz | ESR<br>100 kHz<br>( $\Omega$ ) | ORDERING CODE<br>MAL2153..... |
| 6.3                                      | 22                  | 4.0 x 4.0 x 5.3                        | 21                      | 3.0                             | 0.30                    | 8                              | 73229E3                       |
|  | 47                  | 5.0 x 5.0 x 5.3                        | 36                      | 3.0                             | 0.30                    | 4                              | 73479E3                       |
|  | 100                 | 6.3 x 6.3 x 5.3                        | 61                      | 6.3                             | 0.30                    | 2                              | 73101E3                       |
|  | 330                 | 8.0 x 8.0 x 10                         | 180                     | 21                              | 0.30                    | 0.5                            | 73331E3                       |
|  | 470                 | 10 x 10 x 10                           | 320                     | 30                              | 0.30                    | 0.3                            | 73471E3                       |
|  | 1000                | 10 x 10 x 14                           | 400                     | 63                              | 0.24                    | 0.24                           | 73102E3                       |
| 10                                       | 33                  | 5.0 x 5.0 x 5.3                        | 31                      | 3.3                             | 0.26                    | 4                              | 74339E3                       |
|  | 220                 | 8.0 x 8.0 x 10                         | 180                     | 22                              | 0.26                    | 0.5                            | 74221E3                       |
|  | 330                 | 10 x 10 x 10                           | 320                     | 33                              | 0.26                    | 0.3                            | 74331E3                       |
|  | 680                 | 10 x 10 x 14                           | 380                     | 68                              | 0.19                    | 0.24                           | 74681E3                       |
| 16                                       | 10                  | 4.0 x 4.0 x 5.3                        | 16                      | 3.0                             | 0.22                    | 8                              | 75109E3                       |
|  | 22                  | 5.0 x 5.0 x 5.3                        | 28                      | 3.5                             | 0.22                    | 4                              | 75229E3                       |
|  | 47                  | 6.3 x 6.3 x 5.3                        | 47                      | 7.5                             | 0.22                    | 2.2                            | 75479E3                       |
|  | 100                 | 8.0 x 8.0 x 6.5                        | 110                     | 16                              | 0.22                    | 1.2                            | 75101E3                       |
|  | 220                 | 10 x 10 x 10                           | 320                     | 35                              | 0.22                    | 0.3                            | 75221E3                       |
|  | 470                 | 10 x 10 x 14                           | 370                     | 75                              | 0.16                    | 0.25                           | 75471E3                       |
| 25                                       | 33                  | 6.3 x 6.3 x 5.3                        | 44                      | 8.3                             | 0.16                    | 2.2                            | 76339E3                       |
|  | 47                  | 8.0 x 8.0 x 6.5                        | 110                     | 12                              | 0.16                    | 1.2                            | 76479E3                       |
|  | 100                 | 8.0 x 8.0 x 10                         | 180                     | 22                              | 0.16                    | 0.5                            | 76101E3                       |
|  | 330                 | 10 x 10 x 14                           | 300                     | 83                              | 0.14                    | 0.27                           | 76331E3                       |
| 35                                       | 4.7                 | 4.0 x 4.0 x 5.3                        | 14                      | 3.0                             | 0.13                    | 8                              | 70478E3                       |
|  | 10                  | 5.0 x 5.0 x 5.3                        | 23                      | 3.5                             | 0.13                    | 4                              | 70109E3                       |
|  | 22                  | 6.3 x 6.3 x 5.3                        | 50                      | 7.7                             | 0.13                    | 2.2                            | 70229E3                       |
|  | 33                  | 8.0 x 8.0 x 6.5                        | 110                     | 12                              | 0.13                    | 1.2                            | 70339E3                       |
| 50                                       | 0.47                | 4.0 x 4.0 x 5.3                        | 5                       | 3.0                             | 0.12                    | 12                             | 71477E3                       |
|  | 1.0                 | 4.0 x 4.0 x 5.3                        | 7                       | 3.0                             | 0.12                    | 12                             | 71108E3                       |
|  | 2.2                 | 4.0 x 4.0 x 5.3                        | 10                      | 3.0                             | 0.12                    | 12                             | 71228E3                       |
|  | 3.3                 | 4.0 x 4.0 x 5.3                        | 12                      | 3.0                             | 0.12                    | 12                             | 71338E3                       |
|  | 4.7                 | 5.0 x 5.0 x 5.3                        | 17                      | 3.0                             | 0.12                    | 6                              | 71478E3                       |
|  | 10                  | 6.3 x 6.3 x 5.3                        | 26                      | 5.0                             | 0.12                    | 3                              | 71109E3                       |
|  | 22                  | 8.0 x 8.0 x 6.5                        | 110                     | 11                              | 0.12                    | 1.2                            | 71229E3                       |
|  | 33                  | 8.0 x 8.0 x 10                         | 180                     | 17                              | 0.12                    | 0.5                            | 71339E3                       |
|  | 47                  | 8.0 x 8.0 x 10                         | 180                     | 24                              | 0.12                    | 0.5                            | 71479E3                       |
|  | 100                 | 10 x 10 x 10                           | 320                     | 50                              | 0.12                    | 0.3                            | 71101E3                       |
| 63                                       | 100                 | 10 x 10 x 14                           | 240                     | 63                              | 0.09                    | 0.34                           | 78101E3                       |
| 100                                      | 33                  | 10 x 10 x 14                           | 170                     | 33                              | 0.07                    | 1.3                            | 79339E3                       |

| ADDITIONAL ELECTRICAL DATA         |                              |  |
|------------------------------------|------------------------------|--|
| PARAMETER                          | CONDITIONS                   | VALUE  |
| <b>Voltage</b>                     |                              |  |
| Surge voltage                      | IEC 60384-18, subclause 4.14 | $U_S \leq 1.15 \times U_R$   |
| Reverse voltage                    | IEC 60384-18, subclause 4.16 | $U_{rev} \leq 1 V$   |
| <b>Current</b>                     |                              |  |
| Leakage current                    | After 2 min at $U_R$         | $I_{L2} \leq 0.01 \times C_R \times U_R$ or $3 \mu A$ , whichever is greater |
| <b>Inductance</b>                  |                              |  |
| Equivalent series inductance (ESL) | Case codes 0405 to 0605      | Typ. 10 nH   |
|                                    | Case codes 0807 to 1014      | Typ. 15 nH   |

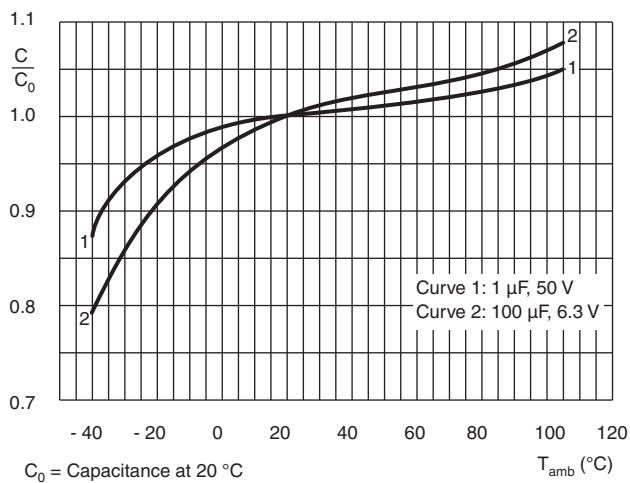
**CAPACITANCE (C)**


Fig. 5 - Typical multiplier of capacitance at 100 Hz or 120 Hz as a function of ambient temperature

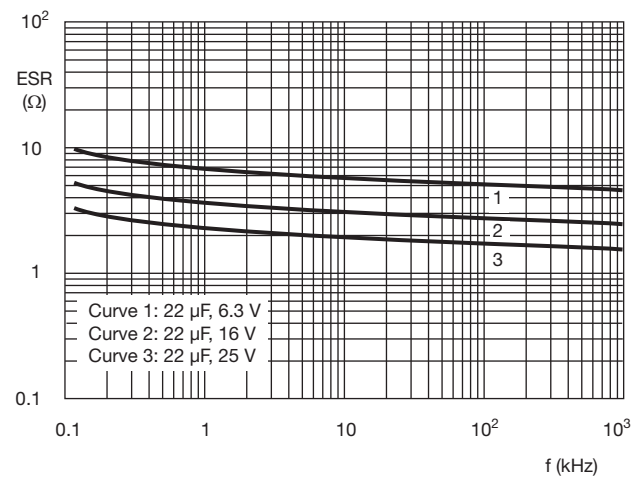
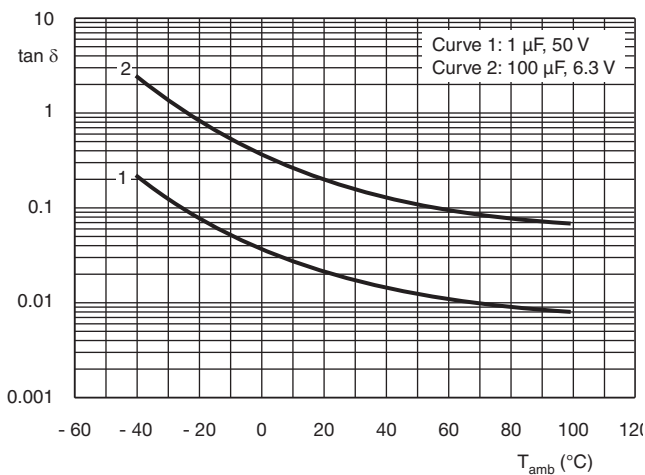
**EQUIVALENT SERIES RESISTANCE (ESR)**


Fig. 6 - Typical ESR as a function of frequency at 20 °C

**DISSIPATION FACTOR (tan δ)**

 Fig. 7 - Typical dissipation factor ( $\tan \delta$ ) at 100 Hz or 120 Hz as a function of ambient temperature

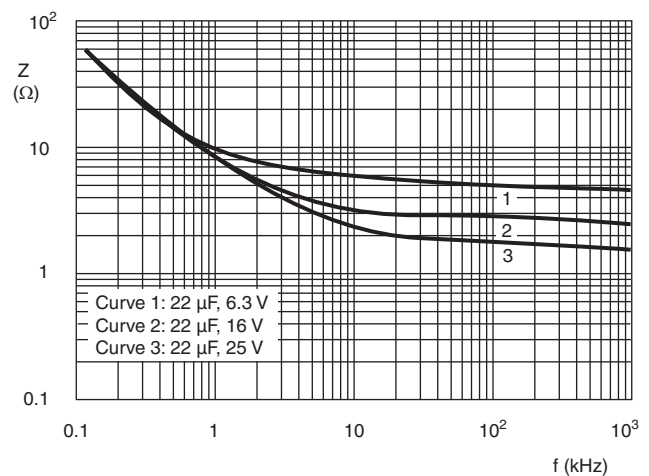
**IMPEDANCE (Z)**


Fig. 8 - Typical impedance as a function of frequency at 20 °C

**RIPPLE CURRENT AND USEFUL LIFE**

Table 5

| ENDURANCE TEST DURATION AND USEFUL LIFE |                               |                                 |  |
|---|-------------------------------|---------------------------------|--|
| NOMINAL CASE SIZE<br>Ø D x L<br>(mm)    | ENDURANCE<br>AT 105 °C<br>(h) | USEFUL LIFE<br>AT 105 °C<br>(h) | USEFUL LIFE<br>AT 40 °C<br>1.3 x I <sub>R</sub> APPLIED<br>(h) |
| 4.0 x 4.0 x 5.3                         | 1000                          | 2000                            | 200 000  |
| 5.0 x 5.0 x 5.3                         | 1000                          | 2000                            | 200 000  |
| 6.3 x 6.3 x 5.3                         | 1000                          | 2000                            | 200 000  |
| 8.0 x 8.0 x 6.5                         | 2000                          | 3000                            | 300 000  |
| 8.0 x 8.0 x 10                          | 2000                          | 3000                            | 300 000  |
| 10 x 10 x 10                            | 2000                          | 3000                            | 300 000  |
| 10 x 10 x 14                            | 2000                          | 3000                            | 300 000  |

**Note**

- Multiplier of useful life code: CCC206

CCC206

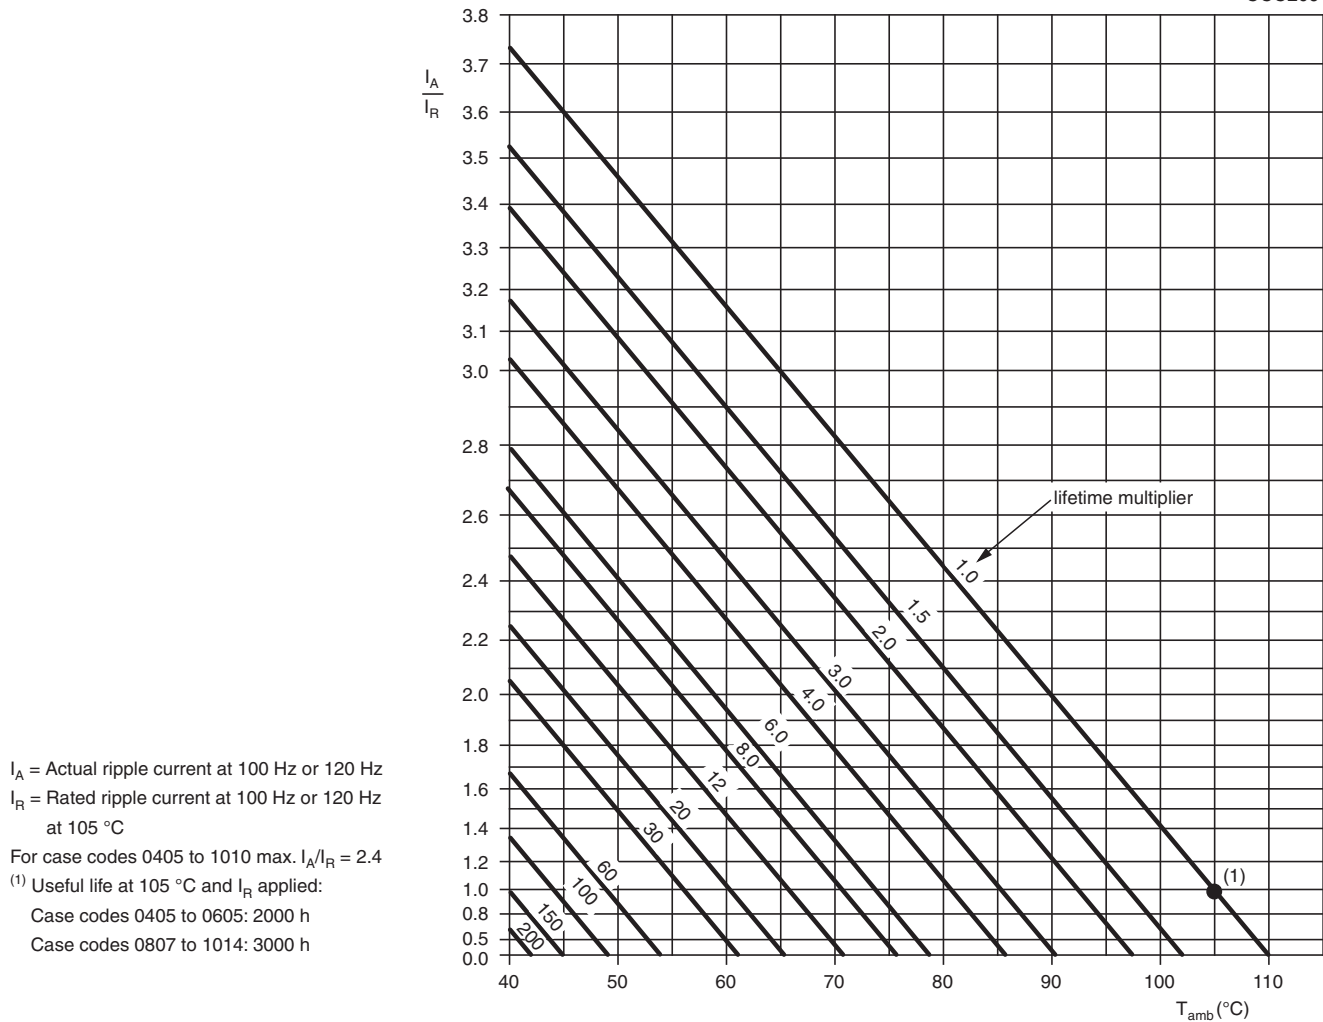


Fig. 9 - Multiplier of useful life as a function of ambient temperature and ripple current load



**Table 6**

| <b>MULTIPLIER OF RIPPLE CURRENT (<math>I_R</math>) AS A FUNCTION OF FREQUENCY</b> |                  |      |      |      |      |                |
|---|------------------|------|------|------|------|----------------|
| $U_R$<br>(V)  | FREQUENCY (Hz)   |      |      |      |      |                |
|   | 50               | 100  | 300  | 1000 | 3000 | $\geq 10\ 000$ |
|   | $I_R$ MULTIPLIER |      |      |      |      |                |
| 6.3   | 0.80             | 1.00 | 1.10 | 1.15 | 1.20 | 1.25           |
| 10  | 0.80             | 1.00 | 1.10 | 1.15 | 1.20 | 1.25           |
| 16  | 0.80             | 1.00 | 1.10 | 1.15 | 1.20 | 1.25           |
| 25  | 0.80             | 1.00 | 1.15 | 1.25 | 1.35 | 1.40           |
| 35  | 0.80             | 1.00 | 1.15 | 1.25 | 1.35 | 1.40           |
| 50  | 0.80             | 1.00 | 1.20 | 1.35 | 1.45 | 1.50           |
| 63  | 0.80             | 1.00 | 1.20 | 1.35 | 1.45 | 1.50           |
| 100   | 0.80             | 1.00 | 1.20 | 1.35 | 1.45 | 1.50           |

**Table 7**

| <b>TEST PROCEDURES AND REQUIREMENTS</b>        |   |  |  |
|--|---|--|--|
| TEST   |   | PROCEDURE<br>(quick reference)   | REQUIREMENTS   |
| NAME OF TEST                                   | REFERENCE                                       |  |  |
| Mounting                                       | IEC 60384-18,<br>subclause 4.3                  | Shall be performed prior to tests mentioned below;<br>reflow soldering;<br>for maximum temperature load<br>refer to chapter "Mounting"                   | $\Delta C/C: \pm 10\ %$<br>$\tan \delta \leq \text{spec. limit}$<br>$I_{L2} \leq \text{spec. limit}$   |
| Endurance                                      | IEC 60384-18 /<br>CECC 32300,<br>subclause 4.15 | $T_{\text{amb}} = 105\ ^\circ\text{C}$ ; $U_R$ applied;<br>1000 h, case codes 0405 to 0605<br>2000 h, case codes 0807 to 1014                            | $\Delta C/C: \pm 20\ %$<br>$\tan \delta \leq 2 \times \text{spec. limit}$<br>$I_{L2} \leq \text{spec. limit}$  |
| Useful life                                    | CECC 30301,<br>subclause 1.8.1                  | $T_{\text{amb}} = 105\ ^\circ\text{C}$ ; $U_R$ and $I_R$ applied;<br>2000 h, case codes 0405 to 0605<br>3000 h, case codes 0807 to 1014                  | $\Delta C/C: \pm 50\ %$<br>$\tan \delta \leq 3 \times \text{spec. limit}$<br>$I_{L2} \leq \text{spec. limit}$<br>no short or open circuit<br>total failure percentage: $\leq 1\ %$ |
| Shelf life<br>(storage at high<br>temperature) | IEC 60384-18 /<br>CECC 32300,<br>subclause 4.17 | $T_{\text{amb}} = 105\ ^\circ\text{C}$ ; no voltage applied;<br>1000 h<br>After test: $U_R$ to be applied for 30 min,<br>24 h to 48 h before measurement | For requirements<br>see "Endurance test" above   |

Statements about product lifetime are based on calculations and internal testing. They should only be interpreted as estimations. Also due to external factors, the lifetime in the field application may deviate from the calculated lifetime. In general, nothing stated herein shall be construed as a guarantee of durability.



## **Disclaimer**

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.