



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



**YELLOW MAN5350/5360  
GREEN MAN5450/5460**

**RED MAN5750/5760  
ORANGE-RED MAN5950/5960**



**FEATURES**

- Large, easy to read, digits
- Common anode or common cathode models
- Fast switching - excellent for multiplexing
- Low power consumption
- Bold solid segments that are highly legible
- Solid state reliability - long operation life
- Rugged plastic construction
- Directly compatible with integrated circuits
- High brightness with high contrast
- Categorized for luminous intensity (see Note 5)
- Wide angle viewing . . . 150°
- Low forward voltage
- Untinted segments on grey face

**DESCRIPTION**

This display series is a family of large digits 0.510 inches in height. All models have right hand decimal points and are available in common anode or common cathode configurations. All units are constructed with untinted segments on grey face to enhance ON/OFF contrast. Standard units are available in red, orange-red, green and yellow.

**APPLICATIONS**

- For industrial and consumer applications such as:
- Digital readout displays
  - Instrument panels
  - Point of sale equipment
  - Digital clocks
  - TV and radios

<b>MODEL NUMBERS</b>			
<b>PART NUMBER</b>	<b>COLOR</b>	<b>DESCRIPTION</b>	<b>PIN OUT SPECIFICATION (See Page 5)</b>
MAN5350	Yellow	Common Anode	A
MAN5360	Yellow	Common Cathode	B
MAN5450	Green	Common Anode	A
MAN5460	Green	Common Cathode	B
MAN5750	Red	Common Anode	A
MAN5760	Red	Common Cathode	B
MAN5950	Orange-Red	Common Anode	A
MAN5960	Orange-Red	Common Cathode	B


<b>ELECTRO-OPTICAL CHARACTERISTICS</b> (TA = 25° Unless Otherwise Specified)					
	<b>MIN.</b>	<b>TYP.</b>	<b>MAX.</b>	<b>UNITS</b>	<b>TEST CONDITION</b>
<b>YELLOW MAN5350/MAN5360</b>					
Luminous Intensity, digit average (See Note 1)	820	1200 480		$\mu\text{cd}$ $\mu\text{cd}$	$I_f = 10 \text{ mA}$ $I_f = 5 \text{ mA}$
Peak emission wavelength		585		nm	$I_f = 10 \text{ mA}$
Dominant wavelength	582		593	nm	$I_f = 10 \text{ mA}$
Spectral line half width		40		nm	
Forward voltage		2.4	3.0	V	$I_f = 20 \text{ mA}$
Dynamic resistance		26			$I_f = 20 \text{ mA}$
Capacitance		35		pF	$V_R = 0, f = 1\text{MHz}$
Reverse current			10	$\mu\text{A}$	$V_R = 6.0 \text{ V}$
<b>GREEN MAN5450/MAN5460</b>					
Luminous Intensity, digit average (See Note 1)	820	3000 1000		$\mu\text{cd}$ $\mu\text{cd}$	$I_f = 10 \text{ mA}$ $I_f = 5 \text{ mA}$
Peak emission wavelength		562		nm	$I_f = 10 \text{ mA}$
Dominant wavelength	564		574	nm	$I_f = 10 \text{ mA}$
Spectral line half width		30		nm	
Forward voltage		2.4	3.0	V	$I_f = 20 \text{ mA}$
Dynamic resistance		12			$I_f = 20 \text{ mA}$
Capacitance		40		pF	$V_R = 0, f = 1\text{MHz}$
Reverse current			10	$\mu\text{A}$	$V_R = 6.0 \text{ V}$

<b>ELECTRO-OPTICAL CHARACTERISTICS</b> (TA = 25° Unless Otherwise Specified)					
	<b>MIN.</b>	<b>TYP.</b>	<b>MAX.</b>	<b>UNITS</b>	<b>TEST CONDITION</b>
<b>RED MAN5750/MAN5760</b>					
Luminous Intensity, digit average (See Note 1)	280	500 250		μCd μCd	I <sub>F</sub> = 10 mA I <sub>F</sub> = 5 mA
Peak emission wavelength		655		nm	I <sub>F</sub> = 10 mA
Dominant wavelength		645		nm	I <sub>F</sub> = 10 mA
Spectral line half width		20		nm	
Forward voltage		1.6	2.0	V	I <sub>F</sub> = 20 mA
Dynamic resistance		2			I <sub>F</sub> = 20 mA
Capacitance		35		pF	V <sub>R</sub> = 0, f = 1MHz
Reverse current			10	μA	V <sub>R</sub> = 6.0 V
<b>ORANGE-RED MAN5950/MAN5960</b>					
Luminous Intensity, digit average (See Note 1)	820	2500 700		μcd μcd	I <sub>F</sub> = 10 mA I <sub>F</sub> = 5 mA
Peak emission wavelength		635		nm	I <sub>F</sub> = 10 mA
Dominant wavelength	615		630	nm	I <sub>F</sub> = 10 mA
Spectral line half width		40		nm	
Forward voltage		2.0	3.0	V	I <sub>F</sub> = 20 mA
Dynamic resistance		26			I <sub>F</sub> = 20 mA
Capacitance		35		pF	V <sub>R</sub> = 0, f = 1MHz
Reverse current			10	μA	V <sub>R</sub> = 6.0 V

<b>ABSOLUTE MAXIMUM RATINGS</b>				
	<b>MAN5350 MAN5360</b>	<b>MAN5450 MAN5460</b>	<b>MAN5750 MAN5760</b>	<b>MAN5950 MAN5960</b>
Power Dissipation at 25°C Ambient .....	600 mW	570 mW	480 mW	600 mW
Derate linearly from 50°C .....	-10.3 mW/°C	-12 mW/°C	-6.9 mW/°C	-8.6 mW/°C
Storage and operating temperature .....	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C	-40°C to +85°C
Continuous forward current				
Total .....	200 mA	240 mA	240 mA	240 mA
Per segment .....	25 mA	30 mA	30 mA	30 mA
Decimal point .....	25 mA	30 mA	30 mA	30 mA
Reverse voltage				
Per segment .....	6.0 V	6.0 V	6.0 V	6.0 V
Decimal point .....	6.0 V	6.0 V	6.0 V	6.0 V
Soldering time at 260°C (See Notes 3 and 4) .....	5 sec.	5 sec.	5 sec.	5 sec.


<b>NOTES</b>
1. The digit average Luminous Intensity is obtained by summing the Luminous Intensity of each segment and dividing by the total number of segments. Intensity will not vary more than ±33.3% between all segments within a digit.
2. The relative luminous intensity in this curve is normalized to the brightness at 25°C to indicate the relative efficiency over the operating temperature range.
3. Leads of the device immersed to 1/16 inch from the body. Maximum device surface temperature is 140°C.
4. For flux removal, Freon TF, Freon TE, Isoproponal or water may be used up to their boiling points.
5. All displays are categorized for Luminous Intensity. The intensity category is marked on each part as a suffix letter to the part number.

<b>RECOMMENDED OPTICAL FILTERS</b>			
For optimum ON and OFF contrast, one of the following filters or equivalents should be used over the display:			
<b>DEVICE TYPE</b>	<b>FILTER</b>	<b>DEVICE TYPE</b>	<b>FILTER</b>
MAN5350	Panelgraphic Yellow 25 or Amber 23	MAN5450	Panelgraphic Green 48
MAN5360	Homalite 100-1720 or 100-1726	MAN5460	Homalite 100-1440 Green
	Panelgraphic Grey 10		Panelgraphic Grey 10
	Homalite 100-1266 Grey		Homalite 100-1266 Grey
MAN5750	Panelgraphic Red 60	MAN5950	Panelgraphic Scarlet 65
MAN5760	Homalite 100-1605	MAN5960	Homalite 100-1670

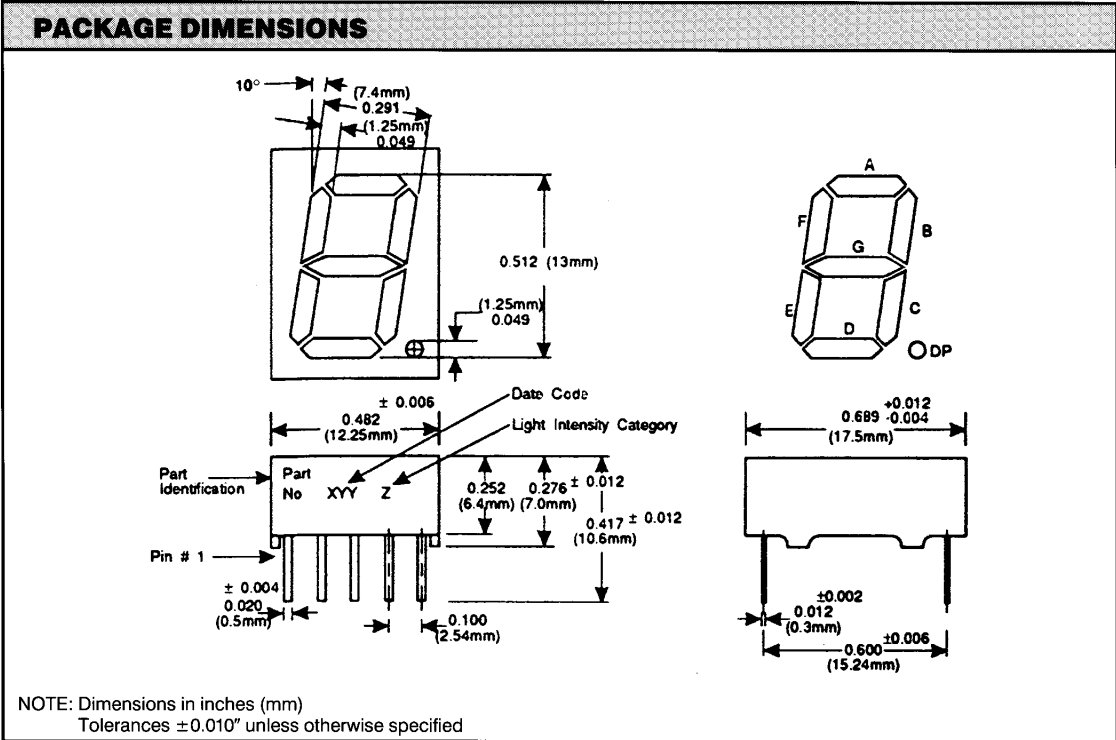

**ELECTRICAL CONNECTIONS**

PIN NO.	A	B
	MAN 5 X 50	MAN 5 X 60
1	Cathode E	Anode E
2	Cathode D	Anode D
3	Com. Anode	Com. Cathode
4	Cathode C	Anode C
5	Cathode D.P.	Anode D.P.
6	Cathode B	Anode B
7	Cathode A	Anode A
8	Com. Anode	Com. Cathode
9	Cathode F	Anode F
10	Cathode G	Anode G

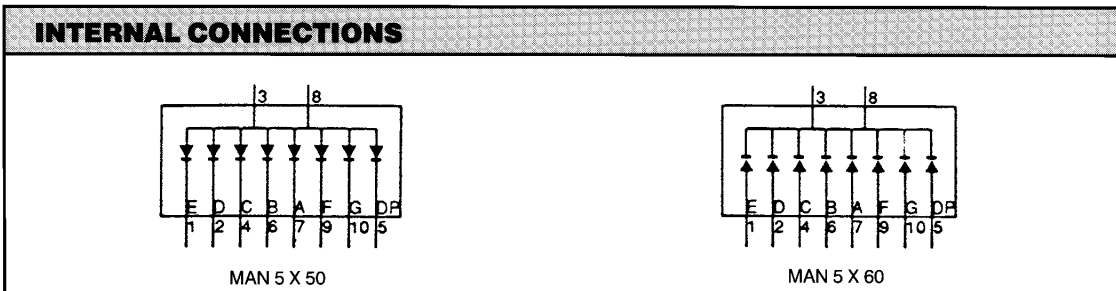

**TYPICAL CHARACTERISTIC CURVES**




Fig. 1A. Relative Luminous Intensity vs. DC Forward Current




Fig. 1B. Forward Current vs. Forward Voltage

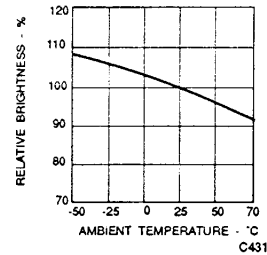


Fig. 1C. Relative Luminous Intensity vs. Temperature (See Note 2)




Fig. 1D. Max Peak Current vs. Duty Cycle




Fig. 1E. Relative Luminous Intensity vs. Duty Cycle

FIGURE 1: MAN5350/MAN5360




Fig. 2A. Relative Luminous Intensity vs. Forward Current




Fig. 2B. Forward Current vs. Forward Voltage

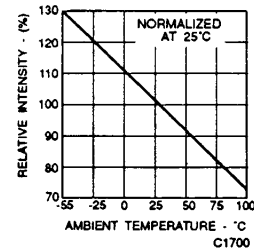


Fig. 2C. Relative Luminous Intensity vs. Temperature (See Note 2)




Fig. 2D. Relative Efficiency vs. Duty Cycle




Fig. 2E. Maximum Peak Current vs. Pulse Duration

FIGURE 2: MAN5450/MAN5460

**TYPICAL CHARACTERISTIC CURVES**




Fig. 3A. Relative Luminous Intensity vs. DC Forward Current




Fig. 3B. Forward Current vs. Forward Voltage




Fig. 3C. Relative Luminous Intensity vs. Temperature (See Note 2)

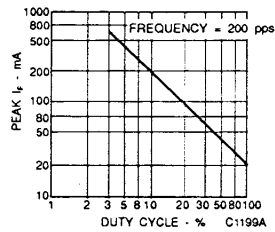


Fig. 3D. Max Peak Current vs. Duty Cycle




Fig. 3E. Relative Luminous Intensity vs. Duty Cycle

FIGURE 3: MAN5750/MAN5760




Fig. 4A. Relative Luminous Intensity vs. Forward Current




Fig. 4B. Forward Current vs. Forward Voltage




Fig. 4C. Relative Luminous Intensity vs. Temperature (See Note 2)




Fig. 4D. Maximum Peak Current vs. Duty Cycle




Fig. 4E. Relative Luminous Intensity vs. Duty Cycle

FIGURE 4: MAN5950/MAN5960





## 0.510 INCH (13MM) SEVEN SEGMENT DISPLAYS

---

### **DISCLAIMER**

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

### **LIFE SUPPORT POLICY**

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.