



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

MAP30/40/42 Series

AC-DC Power Supplies

The Bel Power Solutions MAP30/40/42 Series of power supplies combines low cost and universal input in a board-only power solution to meet commercial and industrial requirements. Full international safety, EMI and ESD compliance ensure worldwide acceptance. All units bear the CE Mark.

Fixed frequency operation simplifies system level operation. The MAP30/40/42 Series is configured to the international standard 3 x 5 inch footprint. Input and output connections are made via popular single-row Molex connectors. Single output models feature wide-range output adjustability to meet a wide variety of standard and user-specific output voltage requirements.



Key Features & Benefits

- Universal Input 85-264 VAC
- Input Transient & ESD Compliance to EN61000-4-2/-3/-4
- Meets EN55022 Conducted and Radiated Limits
- Greater than 311,000 Hours MTBF
- Remote Sense (MAP30, MAP42)
- RoHS Compliant
- CE Marked to Low Voltage Directive

1. SINGLE-OUTPUT MODEL SELECTION

MODEL ⁹	OUTPUT VOLTAGE	ADJUSTMENT RANGE	MAX OUTPUT CURRENT	PEAK OUTPUT CURRENT ¹	LINE REGULATION	LOAD REGULATION	RIPPLE & NOISE ²	INITIAL SETTING ACCURACY
MAP30-1005G	5V	4.7V to 5.8V	6A	8A ⁸	0.2%	±1%	1%	4.9V to 5.1V
MAP42-1005	5V	4.7V to 5.8V	8A	11A	0.2%	±1%	1%	4.9V to 5.1V
MAP42-1012G	12V/15V	11V to 18V	3.4/2.7A ³	4.6/3.7A ³	0.2%	1%	1%	11.9V to 12.1V
MAP42-1024G	24V/28V	23V to 29V	1.7/1.4A ³	2.3/1.9A ³	0.2%	1%	1%	23.8V to 24.2V

2. MULTIPLE-OUTPUT MODEL SELECTION – 40 W CONTINUOUS OUTPUT POWER

MODEL ⁹	OUTPUT VOLTAGE	ADJUSTMENT RANGE	OUTPUT CURRENT	PEAK OUTPUT CURRENT ⁴	LINE REGULATION	LOAD REGULATION	RIPPLE & NOISE ²	INITIAL SETTING ACCURACY	MAXIMUM OUTPUT POWER
MAP40-3000G	+5V	4.7V to 5.5V	3A	5A	0.2%	2%	1%	4.9V to 5.1V	40 W ⁷
	+12V	Fixed	2A	3.5A	1%	3.5% ⁵	1%	11.5V to 12.5V	
MAP40-3100G	-12V	Fixed	0.3A	0.5A	1%	2% ⁶	1%	-11.5V to -12.5V	40 W ⁷
	+5V	4.75V to 5.25V	3A	5A	0.2%	2%	1%	4.9V to 5.1V	
MAP40-3101G	+12V	Fixed	2A	3.5A	1%	3.5% ⁵	1%	11.5V to 12.5V	40 W ⁷
	-12V	Fixed	0.3A	0.5A	1%	2%	1%	-11.4V to -12.6V	
MAP40-3105G	+5V	4.75V to 5.25V	3A	5A	0.2%	2%	1%	4.9V to 5.1V	40 W ⁷
	+24V	Fixed	1A	1.5A	1%	3.5% ⁵	1%	23.0V to 25.0V	
MAP40-3105G	-12V	Fixed	0.3A	0.5A	1%	2%	1%	-11.5V to -12.5V	40 W ⁷
	+5V	4.7V to 5.8V	3A	5A	0.2%	2%	1%	4.9V to 5.1V	
MAP40-3500G	+12V	Fixed	2A	3.5A	1%	3.5% ⁵	1%	11.5V to 12.5V	40 W ⁷
	-12V	Fixed	0.3A	0.5A	1%	2%	1%	-11.4V to -12.6V	
MAP40-3003G	+5V	4.7V to 5.8V	5A	6A	0.2%	2%	1%	4.9V to 5.1V	40 W ⁷
	+12V	Fixed	1A	3.5A	1%	3.5% ⁵	1%	11.5V to 12.5V	
MAP40-3003G	-12V	Fixed	0.3A	0.5A	1%	2%	1%	-11.4V to -12.6V	40 W ⁷
	+5V	4.7V to 5.8V	3A	5A	0.2%	2%	1%	4.9V to 5.1V	
MAP40-3003G	+15V	Fixed	1.5A	3A	1%	3.5% ⁵	1%	14.7V to 15.3V	40 W ⁷
	-15V	Fixed	0.2A	0.5A	1%	2% ⁶	1%	-14.3V to -15.7V	

¹ Peak ratings may be used as maximum output current with 100 Linear Feet per Minute (LFM) forced air cooling.

² Maximum peak to peak noise expressed as a percentage of output voltage, 20 MHz bandwidth.

³ MAP42-1012G output currents are expressed as 12V/15V operation. MAP42-1024G output currents are expressed as 24V/28V operation.

⁴ Peak loads for 30 seconds or less are acceptable, (10% duty cycle max.).

⁵ Quasi regulated output. See Regulation Curves for more information.

⁶ Requires a minimum load of 0.5A on V1 or 0.3A on V2.

⁷ Needs 170 LFM forced air cooling for use at 50°C ambient.

⁸ Needs 200 LFM forced air cooling for use at 50°C ambient.

⁹ Non-G models use lead solder exemption and are not recommended for new designs.

 Model highlighted in yellow is not recommended for new designs.

3. INPUT SPECIFICATIONS

PARAMETER	CONDITIONS / DESCRIPTION		MIN	NOM	MAX	UNITS
Input Voltage - AC	Continuous input range	MAP42 MAP30, MAP40	85 90		264 264	VAC
Input Frequency	AC input		47		63	Hz
Brown Out Protection	Lowest AC input voltage that regulation is maintained with full rated loads.		85			VAC
Hold-up Time	Nominal AC Input Voltage (115VAC), full rated load.		15			ms
Input Current	90 VAC (40W load).				1.2	A _{RMS}
Input Protection	Non-user serviceable internally located AC input line fuse.					
Inrush Surge Current	Internally limited by thermistor, Vin = 264 VAC (one cycle), 25° C				38	A _{PK}
Operating Frequency	Switching frequency of power supply (fixed frequency).		23	25	30	kHz

4. OUTPUT SPECIFICATIONS

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Efficiency	Full load @120 VAC	70% typical			
Minimum Loads	Single output models; MAP30, MAP42. All multiple output models, see regulation graphs.	0.0			Amps
Ripple and Noise	Full load, 20 MHz bandwidth.				See Model Selection Chart.
Output Power	Multiple output models with convection cooling.			40	Watts
Overshoot / Undershoot	Output voltage overshoot/undershoot at turn-on, V1.			1	%
Regulation	Varies by output, total regulation includes: Line changes from 90-132 VAC or 175-264, changes in load starting at 20% load and changing to 100% load.				See regulation graphs.
Transient Response	Recovery time, to within 1% of initial set point due to a 50-100% load change, 4% max. deviation. (Main output only of multiple output units).			500	μs
Turn-on Delay	Time required for initial output voltage stabilization.	1	2		Sec
Turn-on Rise Time	Time required for output voltage to rise from 10% to 90%.	20			ms

5. INTERFACE SIGNALS & INTERNAL PROTECTION

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Overvoltage Protection	MAP30-1005G, MAP42-1005 MAP42-1012G MAP42-1024G Main output only of multiple output units.	5.8 20.0 32.0 5.8		6.8 22.0 37.0 6.8	V
Overload Protection	Fully protected against output overload and short circuit. Automatic recovery upon removal of overload condition.			130	%
Remote Sense	Total cable drop, single output models only.			250	mV

⁸ Power Fail Warning is not available for MAP80-1024G. The MAP80-1012G is an open collector output, capable of sinking 35 mA, maximum.

6. SAFETY, REGULATORY AND EMI SPECIFICATIONS

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Agency Approvals	Approved to the latest edition of the following standards: UL/CSA60950-1 2 nd , IEC60950-1 2 nd and EN60950-1 2 nd .				
Dielectric Withstand Voltage	Input to Chassis Input to Output (tested by manufacturer only)	2121 4242			VDC
Electromagnetic Interference	FCC CFR title 47 part 15 sub-part B - conducted EN55022 / CISPR 22 conducted (Note 1) EN55022 / CISPR 22 radiated (Note 2)		B B B		Class
Input Transient Protection	EN61000-4-5 Level 3	Line to Line Line to Ground	1 2		kV
Insulation Resistance	Input to output		7		MΩ
Leakage Current	Per EN60950, 264VAC	MAP42, MAP40-3100G/3001G/3105G/3500G MAP30-1005G, MAP40-3000G, MAP40-3003G		500 750	μA

7. ENVIRONMENTAL SPECIFICATIONS

PARAMETER	CONDITIONS/DESCRIPTION	MIN	NOM	MAX	UNITS
Altitude	Operating Non-operating			10k 40k	ASL Ft.
Operating Temperature	Derate linearly above 50°C by 2.5% per °C to a maximum temperature of 70°C	At 100% load: At 50% load:	0 0	50 70	°C
Storage Temperature			-40	85	°C
Temperature Coefficient	0°C to 70°C (after 15 minute warm-up)		±0.02	±0.03	%/°C
Relative Humidity	Non-condensing		5	95	%RH
Shock	Operating, peak acceleration			20	G
Vibration	Random vibration, 10Hz to 2kHz, 3 axis			6	G _{RMS}

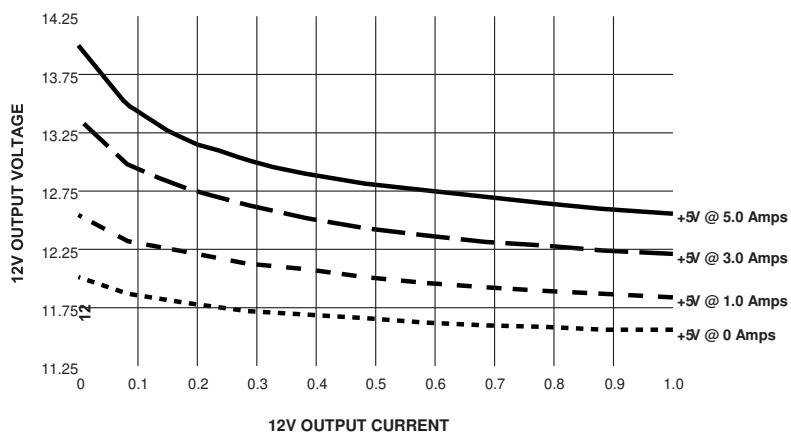


Figure 1. MAP40-3500G Typical Quasi Regulation Performance For +12V Output

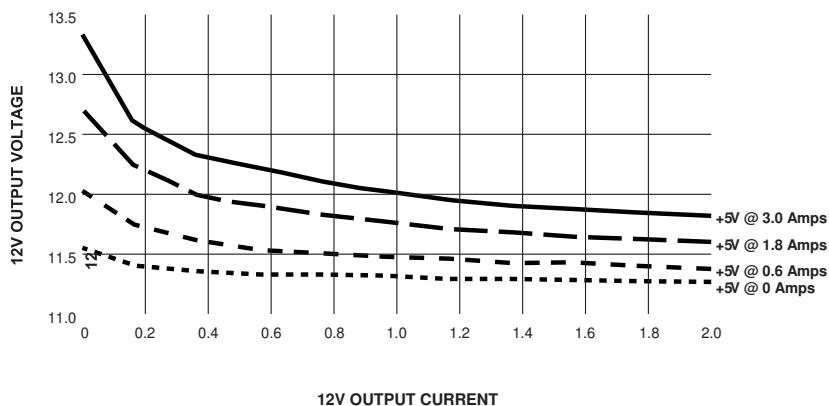


Figure 2. MAP40-3000/3100/3105G Typical Quasi Regulation Performance For +12V Output


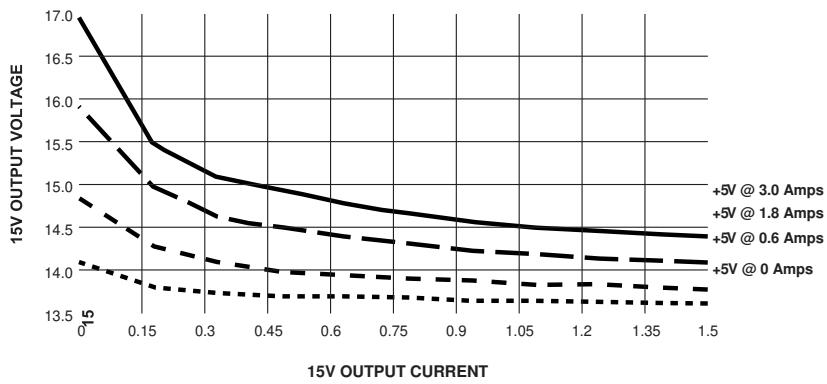


Figure 3. MAP40-3003G Typical Quasi Regulation Performance For +15V Output

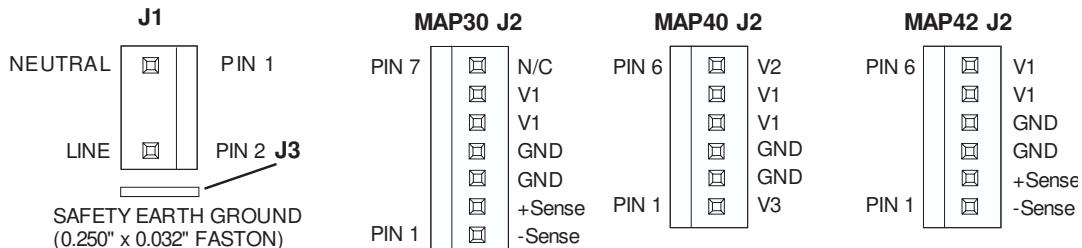

J1/J2 MATES WITH MOLEX (SERIES 2139 or SERIES 41695) .156" (4mm)
CENTER CRIMP TERMINAL HOUSING OR EQUIVALENT

Figure 4. Electrical Connectors

8. MECHANICAL SPECIFICATIONS / OPTIONS

PARAMETER	CONDITIONS / DESCRIPTION	MIN	NOM	MAX	UNITS
Dimensions		127.0 x 76.2 x see table below	5.0 x 3.0 x see table below		mm in
Weight		0.26	0.6		kg lb

SINGLE OUTPUT MODELS		MULTIPLE OUTPUT MODELS	
Model	Height	Model	Height
MAP30-1005G	1.16" (29.5)	MAP40-3000G	1.16" (29.5)
MAP42-1005	1.25" (31.8)	MAP40-3003G	1.16" (29.5)
MAP42-1012G	1.25" (31.8)	MAP40-3100G	1.25" (31.8)
MAP42-1024G	1.25" (31.8)	MAP40-3101G	1.25" (31.8)
		MAP40-3105G	1.25" (31.8)
		MAP40-3500G	1.60" (40.6)

Table 1. MAP30/40/42 Series Height

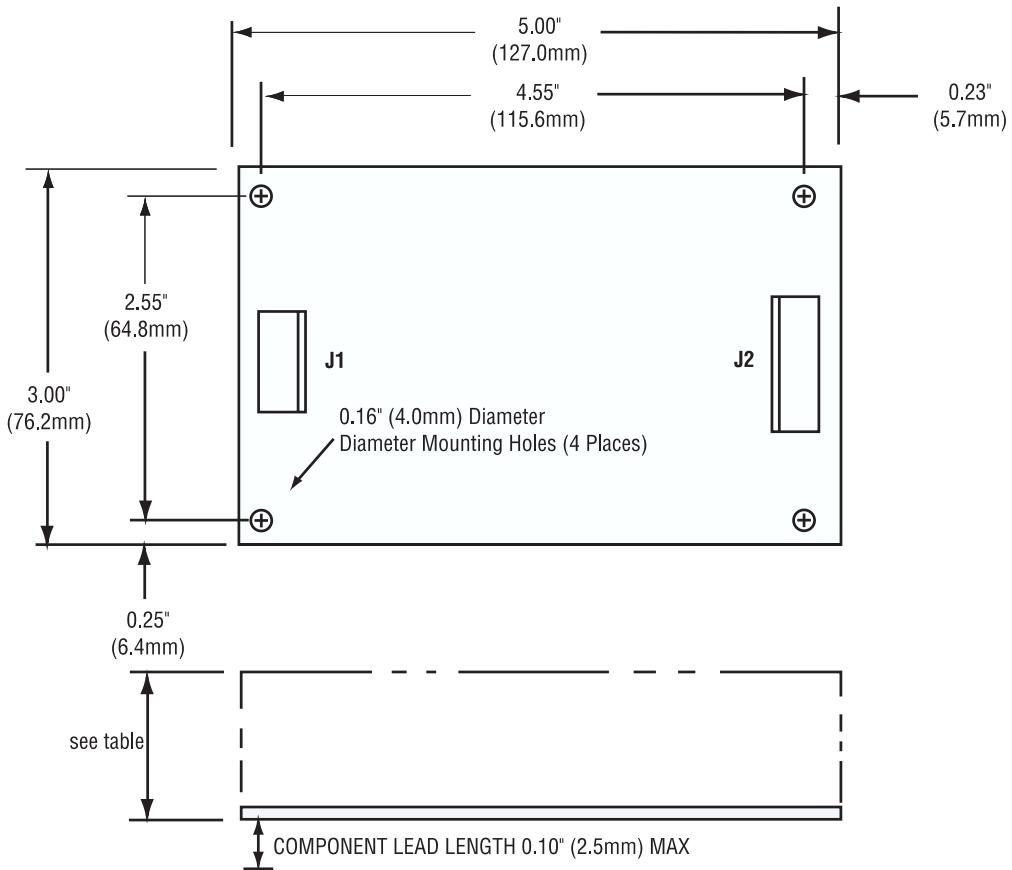


Figure 1. Mechanical Drawing

For more information on these products consult: tech.support@psbel.com

NUCLEAR AND MEDICAL APPLICATIONS - Products are not designed or intended for use as critical components in life support systems, equipment used in hazardous environments, or nuclear control systems.

TECHNICAL REVISIONS - The appearance of products, including safety agency certifications pictured on labels, may change depending on the date manufactured. Specifications are subject to change without notice.