



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Ultra Precision Resistor (Transfer Molded)

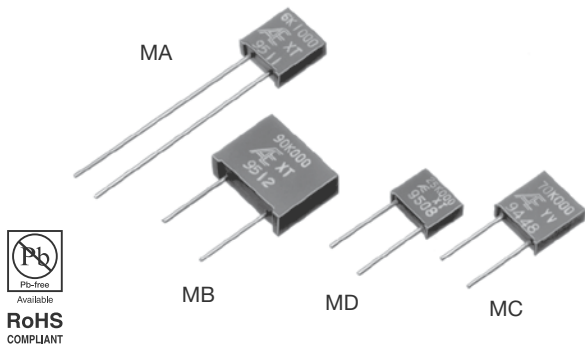

COMPOSITION OF TYPE NUMBER

Example:
MA Y 10K000 A

Labels pointing to the example number:
 - Type: MA
 - TCR: Y
 - Resistance Value: 10K000
 - Tolerance: A

Resistance value, in ohm, is expressed by a series of six characters, five of which represent significant digits. R or K is a dual-purpose letter that designates both the value range (R for ohmic; K for kilo-ohm) and the location of decimal point.

TCR, RESISTANCE RANGE, TOLERANCE, RATED POWER				
Type	TCR (ppm/°C) -55°C to +125°C*	Resistance Range (Ω)	Resistance Tolerance (%)†‡	Rated Power (W) at 125°C
MA MC	0±15 (W)	1 to 5	±0.5 (D) ±1 (F)	0.3 (0.2 at 150 kΩ or above)
	0±5 (X)	5 to 30	±0.1 (B) ±0.5 (D) ±1 (F)	
	0±5 (X) 0±2.5 (Y) 0±1 (Z)**	30 to 200k	±0.005 (V) ±0.01 (T) ±0.02 (Q) ±0.05 (A) ±0.1 (B) ±0.5 (D) ±1 (F)	
MB	0±5 (X)	5 to 30	±0.1 (B) ±0.5 (D) ±1 (F)	0.5 (0.3 at 200 kΩ or above)
	0±5 (X) 0±2.5 (Y) 0±1 (Z)**	30 to 400k	±0.005 (V) ±0.01 (T) ±0.02 (Q) ±0.05 (A) ±0.1 (B) ±0.5 (D) ±1 (F)	
MD	0±5 (X)	5 to 30	±0.1 (B) ±0.5 (D) ±1 (F)	0.125
	0±5 (X) 0±2.5 (Y)	30 to 100	±0.05 (A) ±0.1 (B) ±0.5 (D) ±1 (F)	
	0±5 (X) 0±2.5 (Y) 0±1 (Z)**	100 to 80k	±0.01 (T) ±0.02 (Q) ±0.05 (A) ±0.1 (B) ±0.5 (D) ±1 (F)	


* Symbols in parentheses are for type number composition.

† Resistance figures are the values obtained by measuring the leads at point 12.7±3.2 mm away from the base for Type MA and at point 5.0±1.0 mm for Types MC, MB and MD, but, in case of resistance below 10 ohm, the value at 1.6±0.6 mm away from the base for all types.

**Temperature characteristic Z is applicable for temperature range between 0°C and 60°C.

CONFIGURATION (DIMENSIONS IN mm)

Type	MA	MC	MB	MD
L	7.9±0.2		13.0±0.3	7.4±0.2
L1	1.0 max.		1.5 max.	0.8 max.
W	8.3±0.2		10.0±0.3	6.0±0.2
W1	8.0±0.2		9.5±0.3	5.7±0.2
W2	0.3 max.		0.5 max.	0.4 max.
T	2.8±0.2	2.3±0.2	4.0±0.3	2.3±0.2
F	3.81±0.25	5.08±0.25	7.5±0.5	5.08±0.25
l	25±10		10±3	
d	Dia. 0.65±0.05			

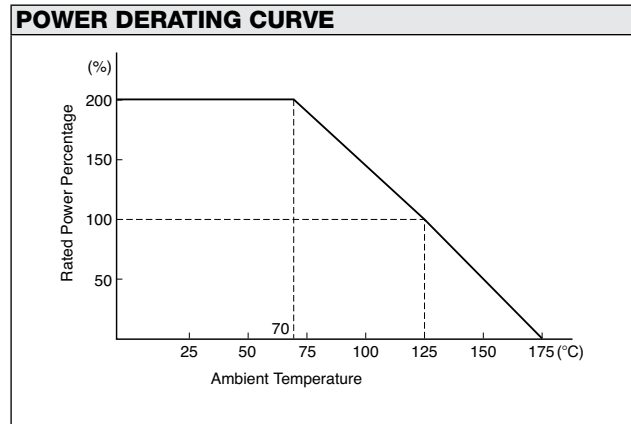

DSCC SPECIFICATIONS

97009
97010
97011

PERFORMANCE			
Parameters	Test Condition	MIL-PRF-55182/9 Specification	ALPHA Typical Test Data
Maximum Rated Operating Temperature Working Temperature Range Maximum Working Voltage			125°C -65°C to +175°C MA, MC=300V, MB=350V, MD=250V
Power Conditioning Thermal Shock Overload	125°C, Rated Power, 100 hrs. -65°C/30 min. ↔ +150°C/30 min., 5 cycles Rated Power x 6.25, 5 sec.	±(0.20%+0.01Ω) ±0.05% ±0.05%	±0.005% ±0.005% ±0.005%
Solderability Resistance to Solvents	Steam Aging 8 hrs., 245°C, 5 sec. ☉ Isopropyl Alcohol + Mineral Spirits ☉ Water + Butyl Cellosolve + Monoethanolamine	over 95% coverage no damage	over 95% coverage no damage
Low Temperature Storage Low Temperature Operation Terminal Strength	-65°C, 24 hrs. -65°C, Rated Voltage, 45 min. 0.908 kg (2 pounds), 10 sec	±0.05% ±0.05% ±0.02%	±0.0025% ±0.0025% ±0.0025%
Dielectric Withstanding Voltage Insulation Resistance Resistance to Soldering Heat Moisture Resistance	Atmo.Pres.: 300V rms. Baro. Pres. 8 mHg: 200V rms. DC 100V, 2 min. +260°C, 10 sec. +65°C to -10°C, 90% RH to 98% RH, Rated Voltage, 10 cycles (240 hrs.)	±0.02% over 10,000 MΩ ±0.02% ±0.05%	±0.0025% over 10,000 MΩ ±0.0025% ±0.01%
Shock (Specified Pulse) Vibration, High Frequency	100G, 6 ms, Sawtooth Wave, X, Y, each 10 shocks 20G, 10 Hz to 2,000 Hz to 10 Hz, 20min., X, Y, each 4 hrs.	±0.01% ±0.02%	±0.0025% ±0.0025%
Life	125°C, Rated Voltage, 1.5 hr. – ON, 0.5 hr. – OFF, 2,000 hrs.	±0.05%	±0.015%
Life 70°C Power Rating	70°C, Rated Voltage x 2, 1.5 hr. – ON, 0.5 hr. – OFF, 2,000 hrs.	±0.05%	±0.015%
Storage Life	15°C to 35°C, 15% RH to 75% RH, No Load, 10,000 hrs.	±0.005%	±0.0025%
High Temperature Exposure	175°C, No Load, 2,000 hrs.	±0.5%	±0.015%
Current Noise Voltage Coefficient Thermal EMF		-32 dB 0,0005%/V 1.0 μV/°C	-42 dB 0,00003%/V 1.0 μV/°C

Type MA meets requirements of MIL-PRF-55182/9.

