



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!




## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




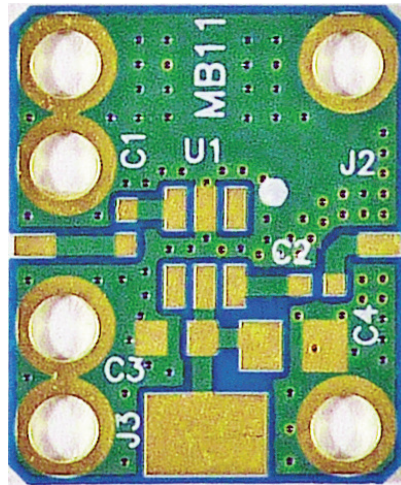


### FEATURES

- Fits Hittite 6-pin SOT-23 prescaler packages
- Divide by 2/4/8 configurations
- Input frequencies up to 8 GHz
- DC blocks on input and output
- RO-4350 board material
- Fits MicroAmp MH-series housings

The MicroAmp MB-11 circuit board is designed for rapid prototyping of Hittite Microwave 6-pin SOT-23 prescalers. HMC-43X prescalers are available in divide by 2/4/8 versions (HMC-432/433/434) which operate at input frequencies as high as 8 GHz. This board will fit the MicroAmp MH series of connectorized housings that allow it to be used as a single prescaler or cascaded with other MicroAmp boards for added versatility. Boards are fabricated from a high-performance 13 mil thick RO-4350 laminate with RoHS compatible ENIG plating (electroless nickel/immersion gold) on both the component side and the solid bottom ground plane. The board measures 0.490" x 0.590" and mounts into the housing with four or six #1-72 screws to insure optimal grounding for high frequency operation. Prescaler circuits can be easily assembled with standard surface-mount passive components. It includes provisions for input and output DC blocking capacitors and bias bypass capacitors. Pads for the RF input/output connectors allow the SMA center pins to be easily soldered to the board after it is installed into the housing, as well as a large pad to connect the bias voltage to the feed-through. These prescalers have a tendency to output broadband noise or oscillations when not driven with sufficient input power. Consult the Hittite data sheets for proper drive levels.

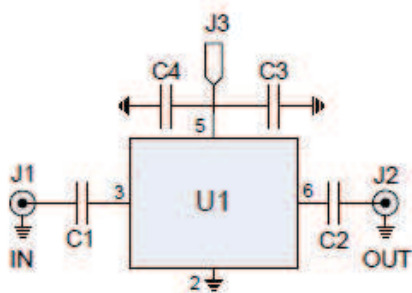

PRESCALER SCHEMATIC



ASSEMBLY

REF	SIZE	FUNCTION
C1	0402	DC block
C2	0402	DC block
C3	0603	Bypass
C4	0603/0805	Bypass
U1	SOT-23	Prescaler
J1		Signal input (pin 3)
J2		Signal output (pin 6)
J3		Bias (pin 5)

For additional product information, please visit [www.twinind.com](http://www.twinind.com)

Contact information: 925-866-8946 (phone) 925-866-8937 (fax) Sales@twinind.com