



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832


Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Graphic Display Controller

MB86276

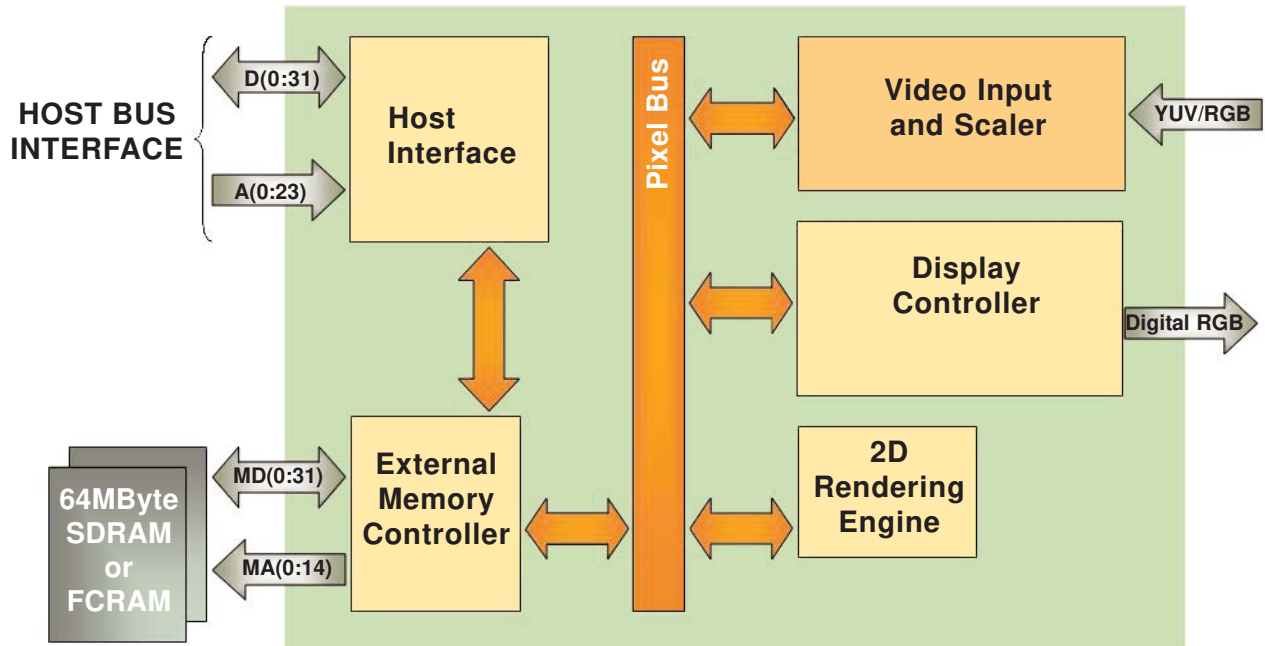

Description

The Fujitsu MB86276 Graphic Display Controller (GDC) is a low-end extension to the Fujitsu Graphic Controller family for 2D applications. This chip is based on the MB86296 3D GDC family core functions, and optimized for 2D rendering.

The display controller, rendering engine and video input unit are taken from the successful

MB86296 3D GDC but the floating point co-processor and all 3D-functions have been taken out. Also, the CPU interface is optimized for more CPU connections and the device has some functions to support small footprint graphic applications. The Fujitsu MB86276 2D GDC is 100% binary-compatible to both the 2D/3D MB86290A and 3D MB86296 GDC families.

Applications

Automotive:

- In-dash navigation
- Infotainment systems
- Configurable instrument panel
- Heads up display

Marine:

- Fish finder
- Navigation

Other:

- Medical Instrumentation
- Industrial automation

Graphic Display Controller

▶ Features

- CMOS 0.18μm technology
- Display resolutions up to 1280 x 768
- 6 layers of overlay display (Windows)
- Alpha Plane
- Digital Video input (various formats)
- Video Scaler (up/down scaling)
- I2C Master/Slave interface
- RGB digital output (8 bit x 3)
- Dual-Display support (2xRGB666 output)
- Includes various kinds of 2D graphic acceleration functions
- Built-in alpha blending, anti-aliasing and chroma-keying
- External SDRAM or FCRAM™ interface at 133MHz for up to 64MBytes graphic memory
- Standard host interface forembedded CPUs/MCUs (32-bit/16-bit)
- GPIO inputs/outputs
- Serial interface
- Supply voltage 3.3V (I/O), 1.8V (Internal)
- BGA-256 package
- Temperature range -40 to +85°C

Lime Host IF multiplexing modes

Mode 1	HST 32-bit	D(31:16)	RGB out 8/8/8		RGB in 6/6/6	
Mode 2	HST 32-bit	D(31:16)	RGB out 8/8/8		GPIO (4:0)	N/A VI (7.0)
Mode 3	HST 16-bit	RGB out 8/8/8		RGB out 6/6/6	GPIO (3)	N/A VI (7.0)
Mode 4	HST 16-bit	RGB out 6/6/6	RGB out 6/6/6	N/A	RGB in 6/6/6	



FUJITSU MICROELECTRONICS AMERICA, INC.

1250 E. Arques Avenue, Sunnyvale, CA 94088-3470

Tel: (800) 866-8608 Fax: (408) 737-5999

E-mail: inquiry@fma.fujitsu.com Web Site: <http://us.fujitsu.com/micro>

© 2006 Fujitsu Microelectronics America, Inc.

All company and product names are trademarks or registered trademarks of their respective owners.

Printed in the U.S.A. GDC-FS-21148-2/2006