



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China





- Perfect for Grounding and Shielding
- 100% Copper Braid
- Provides Excellent Current Transmission

Nominal Size	Part #	Wall Thickness	Min Exp.	Max Exp.	Put Ups		Available Colors	Lbs/100'
					Bulk Spool	Shop Spool		
1/8"	MBC0.13CP	.015"	1/8"	1/4"	250'	25'	Copper	0.90
1/4"	MBC0.25CP	.025"	1/4"	3/8"	100'	25'	Copper	3.00
3/8"	MBC0.38CP	.018"	3/8"	3/4"	100'	25'	Copper	3.10
1/2"	MBC0.50CP	.020"	1/2"	1"	100'	25'	Copper	4.10




Cut Cleanly
Shears

Material
Copper

Grade
MBC

Bare Copper Braid for a Wide Variety of Applications!

Techflex high purity Copper Sleeve is a 100% copper braid for grounding, shielding, and many other unique projects. Our copper series of metal braids are pure metal with no fillers or coating to provide many years of continuous use. Our braid is suitable for hoses, wires, and other lines on a wide variety of applications. Techflex Bar Copper braid will provide high flexibility and excellent current transmission for your demanding uses.

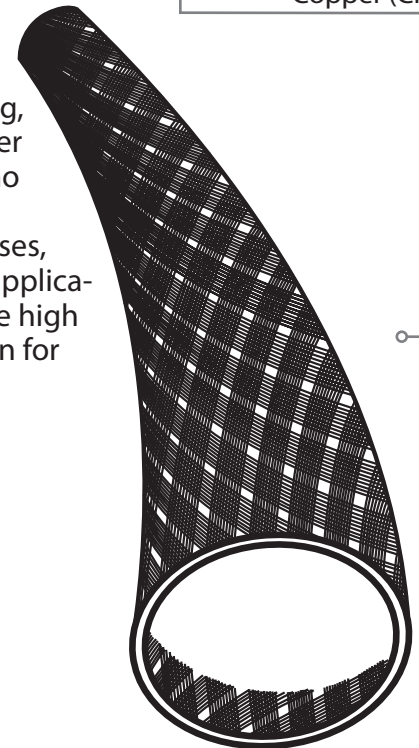


Colors Available:
Copper (CP)



800.323.5140 • 973.300.9242 • fax: 973.300.9409
104 Demarest Road • Sparta, NJ 07871



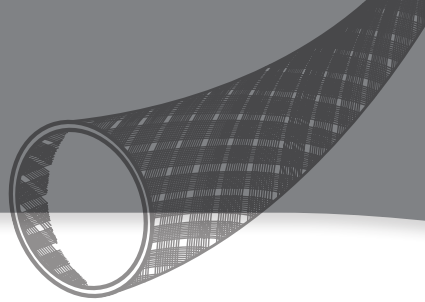

FLAMMABILITY


Rating _____ Non Flammable

CHEMICAL RESISTANCE

1=No Effect 4=More Affected
2=Little Effect 5=Severely Affected
3=Affected

Aromatic Solvents _____	1
Aliphatic Solvents _____	1
Chlorinated Solvents _____	1
Weak Bases _____	1
Salts _____	1
Strong Bases _____	2
Salt Water 0-S-1926 _____	1
Hydraulic Fluid MIL-H-5606 _____	1
Lube Oil MIL-L-7808 _____	1
De-Icing Fluid MIL-A-8243 _____	1
Strong Acids _____	5
Strong Oxidants _____	5
Esters/Ketones _____	1
UV Light _____	2
Petroleum _____	2
Fungus ASTM G-21 _____	2
Halogen Free _____	Yes
RoHS _____	Yes

Melt Point
ASTM D-2117
449°F (232°C)

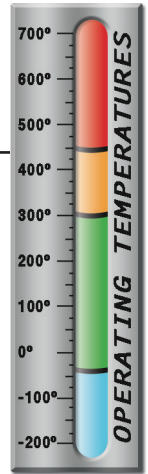

PHYSICAL PROPERTIES

Monofilament Thickness _____ .005
ASTM D-204
Flammability Rating _____ Non Flammable
Recommended Cutting _____ Shears
Colors _____ 1
Wall Thickness _____ .015-.025

www.techflex.com