



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



MC4558


Dual Operational Amplifier

Features


- No frequency compensation required.
- No latch up.
- Large common mode and differential voltage range.
- Parameter tracking over temperature range.
- Gain and phase match between amplifiers.
- Internally frequency compensated.
- Low noise input transistors.

Descriptions

The MC4558 series is a monolithic integrated circuit designed for dual operational amplifier.

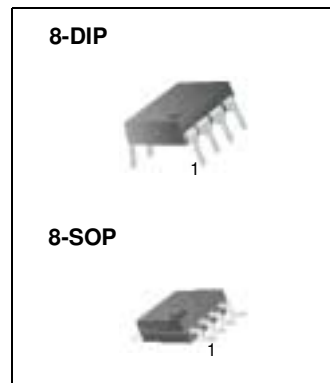


Internal Block Diagram

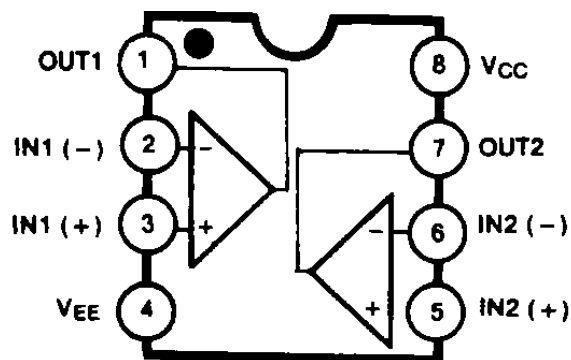

Schematic Diagram

(One Section Only)

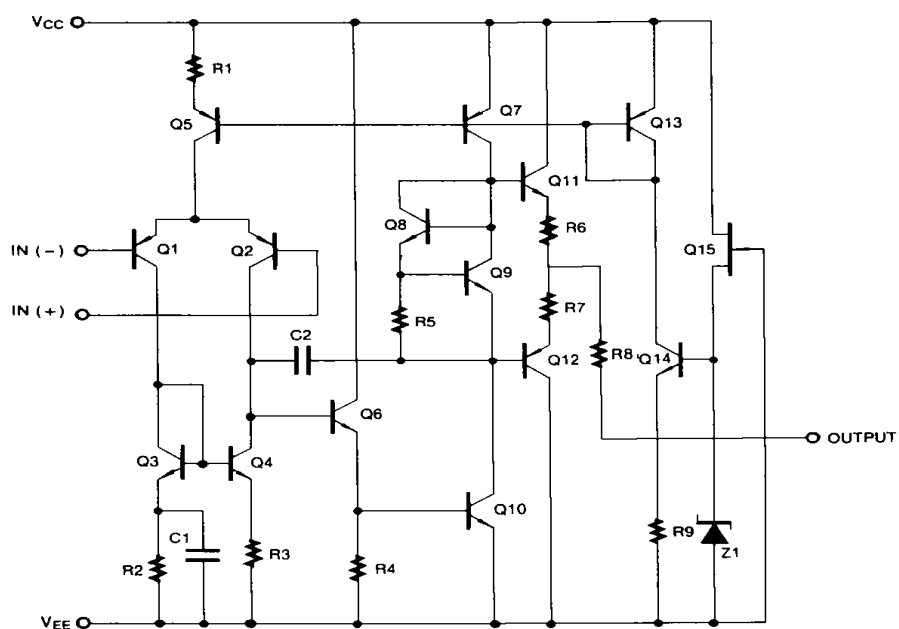

Absolute Maximum Ratings

| Parameter | Symbol | Value | Unit |
|---|----------------------|--------------------|------|
| Supply Voltage | V _{CC} | ±22 | V |
| Differential Input Voltage | V _{I(DIFF)} | 30 | V |
| Input Voltage | V _I | ±15 | V |
| Power Dissipation | P _D | 400 | mW |
| Operating Temperature Range MC4558C MC4558V | T _{OPR} | 0 ~ 70 -40 ~ 85 | °C |
| Storage Temperature Range | T _{STG} | -65 ~ 150 | °C |

Electrical Characteristics

(VCC = 15V, VEE = -15V, TA = 25 °C unless otherwise specified)

| Parameter | Symbol | Conditions | MC4558C/MC4558V | | | Unit |
|-------------------------------------|----------------------|---|-----------------|-----|-----|------|
| | | | Min | Typ | Max | |
| Input Offset Voltage | V _{IO} | R _S ≤ 10KΩ | - | 2 | 6 | mV |
| | | Note 1 | - | - | 7.5 | |
| Input Offset Current | I _{IO} | | - | 5 | 200 | nA |
| | | T _A = T _A (MAX) | - | - | 300 | |
| | | T _A = T _A (MIN) | - | - | 300 | |
| Input Bias Current | I _{BIAS} | | - | 30 | 500 | nA |
| | | T _A = T _A (MAX) | - | - | 800 | |
| | | T _A = T _A (MIN) | - | - | 800 | |
| Large Signal Voltage Gain | G _V | V _O (P-P) = ±10V, R _L ≤ 2KΩ | 20 | 200 | - | V/mV |
| | | Note 1 | - | - | - | |
| Common Mode Input Voltage Range | V _{I(R)} | | ±12 | ±13 | - | V |
| | | Note 1 | - | - | - | |
| Common Mode Rejection Ratio | CMRR | R _S ≤ 10KΩ | 70 | 90 | - | dB |
| | | Note 1 | - | - | - | |
| Supply Voltage Rejection Ratio | PSRR | R _S ≤ 10KΩ | 76 | 90 | - | dB |
| | | Note 1 | 76 | 90 | - | |
| Output Voltage Swing | V _O (P-P) | R _L ≥ 10KΩ | ±12 | ±14 | - | V |
| | | R _L ≥ 2KΩ | ±10 | ±13 | - | |
| Supply Current (Both Amplifiers) | I _{CC} | | - | 3.5 | 5.8 | mA |
| | | T _A = T _A (MAX) | - | - | 5.0 | |
| | | T _A = T _A (MIN) | - | - | 6.7 | |
| Power Consumption (Both Amplifiers) | P _C | | - | 70 | 170 | mW |
| | | T _A = T _A (MAX) | - | - | 150 | |
| | | T _A = T _A (MIN) | - | - | 200 | |
| Slew Rate (Note2) | SR | V _I = 10V, R _L ≥ 2KΩ C _I ≤ 100pF | 1.2 | - | - | V/μs |
| Rise Time (Note2) | T _R | V _I = 20mV, R _L ≥ 2KΩ C _I ≤ 100pF | - | 0.3 | - | μs |
| Overshoot (Note2) | OS | V _I = 20mV, R _L ≥ 2KΩ C _I ≤ 100pF | - | 15 | - | % |

Note :

- MC4558C : T_A(MIN) ≤ T_A ≤ T_A(MAX) = 0 ≤ T_A ≤ 70 °C , MC4558V : T_A(MIN) ≤ T_A ≤ T_A(MAX) = -40 ≤ T_A ≤ +85 °C
- Guaranteed by design.

Typical Performance Characteristics

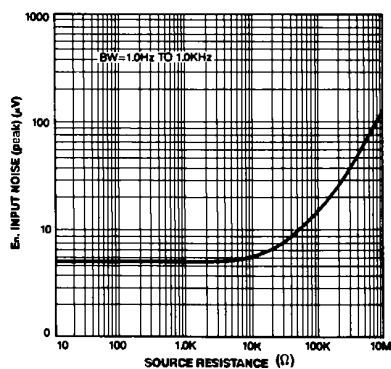


Figure 1. Burst Noise vs Source Resistance

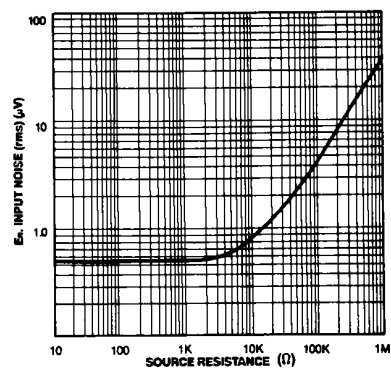


Figure 2. RMS Noise vs Source Resistance

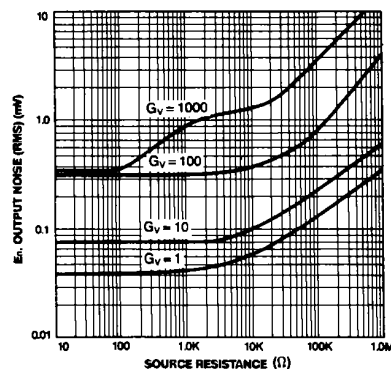


Figure 3. Output Noise vs Source Resistance

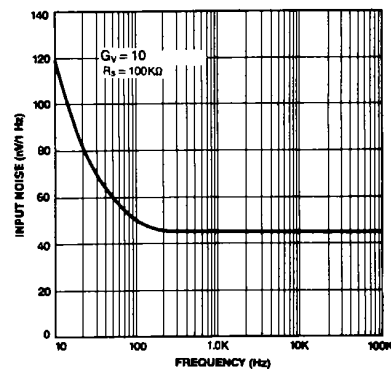


Figure 4. Spectral Noise Density

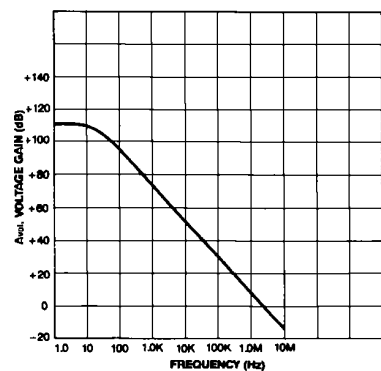


Figure 5. Open Loop Frequency Response

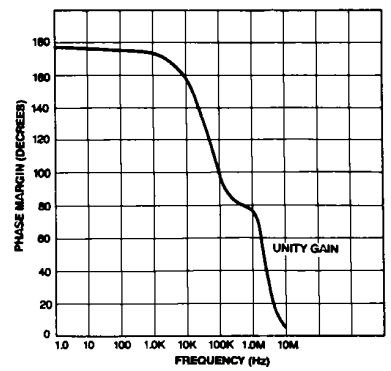


Figure 6. Phase Margin vs Frequency

Typical Performance Characteristics (continued)

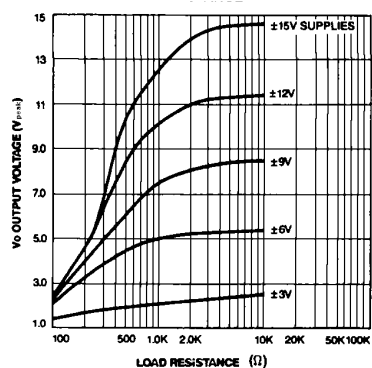


Figure 7. Positive Output Voltage Swing vs Load Resistance

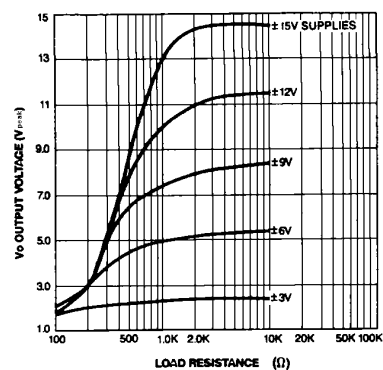


Figure 8. Negative Output Voltage Swing vs Load Resistance


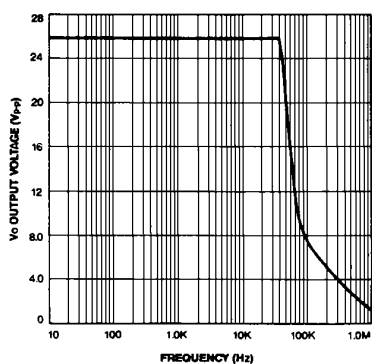


Figure 9. Power Bandwidth
(Large Signal Output Swing vs Frequency)

Mechanical Dimensions

Package

8-DIP

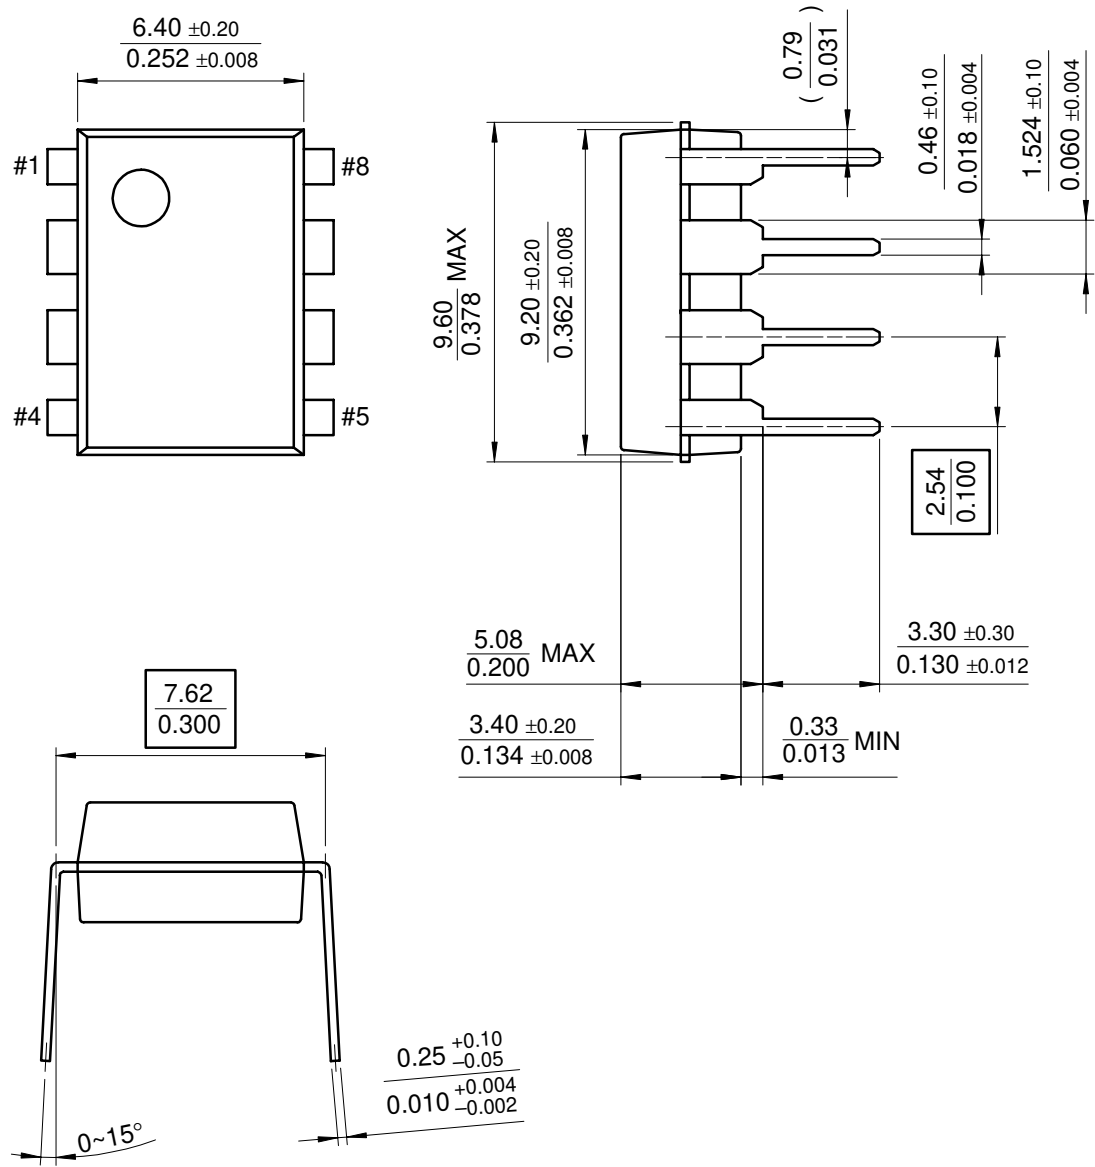

Ordering Information

| Product Number | Package | Operating Temperature |
|----------------|---------|-----------------------|
| MC4558CP | 8-DIP | 0 ~ + 70°C |
| MC4558CD | 8-SOP | |
| MC4558VP | 8-DIP | -40 ~ +85°C |
| MC4558VD | 8-SOP | |

DISCLAIMER

FAIRCHILD SEMICONDUCTOR RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE TO ANY PRODUCTS HEREIN TO IMPROVE RELIABILITY, FUNCTION OR DESIGN. FAIRCHILD DOES NOT ASSUME ANY LIABILITY ARISING OUT OF THE APPLICATION OR USE OF ANY PRODUCT OR CIRCUIT DESCRIBED HEREIN; NEITHER DOES IT CONVEY ANY LICENSE UNDER ITS PATENT RIGHTS, NOR THE RIGHTS OF OTHERS.

LIFE SUPPORT POLICY

FAIRCHILD'S PRODUCTS ARE NOT AUTHORIZED FOR USE AS CRITICAL COMPONENTS IN LIFE SUPPORT DEVICES OR SYSTEMS WITHOUT THE EXPRESS WRITTEN APPROVAL OF THE PRESIDENT OF FAIRCHILD SEMICONDUCTOR CORPORATION. As used herein:

1. Life support devices or systems are devices or systems which, (a) are intended for surgical implant into the body, or (b) support or sustain life, and (c) whose failure to perform when properly used in accordance with instructions for use provided in the labeling, can be reasonably expected to result in a significant injury of the user.
2. A critical component in any component of a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or system, or to affect its safety or effectiveness.