



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China




Part Number: MCL20 500100-A
(APC P/N 160-0064-Z) Rev-I

RoHS Compliant

Ordering Different Lead Types:

Inside Kinked Leads	Use-A after Ametherm's part #
Outside Kinked Leads	Use-B after Ametherm's part #

For Example: to order an inside kinked lead use part number MCL20 500100-A

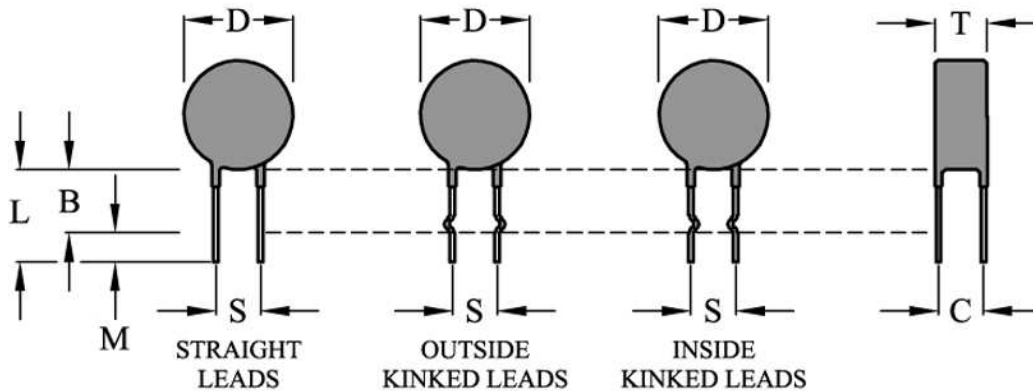

Electrical Specifications

Resistance @ 25° C	50 Ω +20% /-50%
Minimum Switching Current @ 25°C	0.40 A
Max Continuous Current @ 70°C	0.25 A
Max Voltage Rating	680 VRMS
Maximum Inrush Current @ Max Peak Voltage of 680 x 1.414 = 962 V	20.0 Amp
Heat Capacity	5.45 Joules/ °C
Dissipation Constant	55.0 mW/°C
Thermal Time Constant	62 seconds
Switch Temperature	100°C ± 8°C
Operating Temperature	- 50 °C to 150 °C
Storage Temperature	- 50 °C to 120 °C
Leads are copper with nickel underlay and tin plating	
Flammability rating: meets UL94-V0 standard	

Manufacturing Note:

The PTC tends to drop in resistance when exposed to High voltage (> 400VRMS). In addition high temperature wave solder would also cause, the drop in resistance temporarily.

Mechanical Specifications

D	19.0 mm ± 7% (20.33 mm Max.)
T	9.0 mm Max.
Lead Diameter	1.0 mm ± 0.1 mm
S	7.8 mm Nom.
L	16.0 mm Nom.
M	5 mm ± 1.0 mm
B	11.0 mm Nom.

Rev.	Date	Description
A	07/02/07	Dissipation constant changed from 11 mW/°C to 55.0 mW/°C. Heat capacity changed from 3.0 J/°C to 5.45 J/°C
B	07/05/07	Dimension C changed from 3.6 mm to 11.0 mm
C	07/10/07	Added Operating and storage temp., lead material and flammability rating.
D	07/12/07	Dimension T changed from 12.0 mm to 9.0 mm max
E	07/20/07	Dimension B corrected to 12.0 mm Nom., lead spacing changed to 7.8 mm Nom.
F	07/30/07	"T" Dimension changed to 18 mm form 38 mm.
G	07/30/07	"D" Added tolerance and Max Dia
H	08/17/07	Added "M" Dimension & Tolerance
I	02-04-08	Revised the tolerance in resistance to +20%, -50%.

Revision Date: February 5, 2008

Ametherm, Inc. 3111 N. Deer Run Road #4 Carson City, NV 89701

Telephone: (800) 808-2434 (775) 884-2434 Fax: (775) 884-0670

www.ametherm.com