



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



### MD-250-E

#### Electrical Specifications (@25C)

1. Maximum Power: 250VA
2. Input Voltage (power cord) : 240VAC±10%, 50/60Hz
3. Output Voltage (receptacle) : 120.0VAC @ 2.08Max<sup>1</sup>
4. Voltage Regulation: 8% TYP from full load to no load
5. Hipot:
  - Input to output: 3000VAC
  - Input and output to enclosure (Ground): 1500VAC
6. Efficiency: 92% TYP. @ full load
7. Operating ambient temperature: Not to exceed 60°C
8. Leakage current: less than 50uA; typical 10uA
9. Fusing: Replace only with 1.8, 250VAC, slow blo, UL listed fuses.

#### Construction:

These medical grade isolation boxes are built using a toroidal transformer construction that inherently helps reduce stray fields, increases efficiency and minimizes size compared to traditional EI transformers. Built with Class F (155°) insulation system. The enclosure is made of steel and powder coated white.

#### Safety:

Medical isolation transformer box is certified to UL 60601-1, 2<sup>nd</sup> edition medical standard and CSA-C22.2.No. 601.1M90, 2005

UL: (E352717), UL60601-1, 2<sup>nd</sup> edition and CAN/CSA-C22.2 No. 601.1M90, 2005

**Note: Not for use in life critical application**



#### Mounting:


Rubber feet for horizontal mounting.

#### Connections:

Input: 11ft medical grade power cord with Nema 6-15P plug.

Output: Duplex receptacle. Nema 5-15R.



#### Schematic:

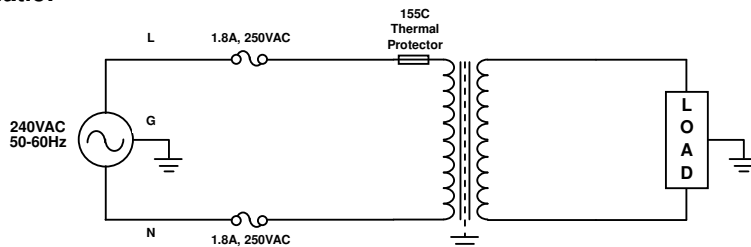

**Please refer to instruction manual for safety precautions.**

\* Upon printing, this document is considered "uncontrolled". Please contact Triad Magnetics' website for the most current version.

<sup>1</sup> Combined loads connected to receptacle(s) must not exceed maximum current rating.



Dimensions: mm

Weight: 4.0Kg

Warranty: 5 years