



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

## General Description


The MDB1900ZB is a true zero delay buffer with a fully-integrated, high-performance, low-power, and low-phase noise programmable PLL.

The MDB1900ZB is capable of distributing the reference clocks for PCIe (Gen1/Gen2/Gen3), SATA, ESI, SAS, SMI and Intel® Quickpath Interconnect (QPI). The MDB1900ZB works in conjunction with a CK410B+, CK509B or CK420BQ clock synthesizer to provide reference clocks to multiple agents.

The MDB1900ZB is designed for Intel's DB1900Z specification. The Intel part designation for the MDB1900ZB is identified as G20746-002.

Datasheets and support documentation are available on Micrel's web site at: [www.micrel.com](http://www.micrel.com).

## Block Diagram

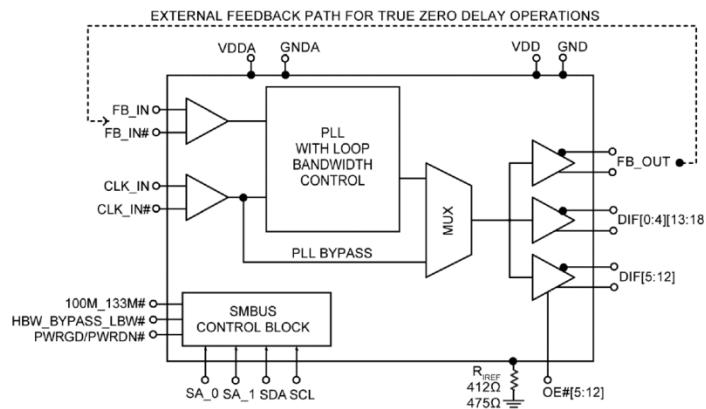

## Features

- Supports zero delay (0ps) buffer mode for 100MHz and 133MHz clock frequencies.
- External feedback path for true zero delay operations
- Zero delay (PLL) mode can filter jitter in incoming clock
- Selectable PLL bandwidth for PLL mode
- Supports fanout buffer mode for clock frequencies between 0 and 250MHz
- Differential input reference with HCSL logic (0~0.7V)
- Nineteen differential HCSL-compatible clock output pairs
- Eight dedicated OE# pins to control their assigned output. Glitch free assertion/de-assertion.
- Spread spectrum modulation tolerant for EMI reduction
- SMBus interface for controlling output properties (enable/disable and delay tuning)
- Disabled outputs in power-down mode for maximum power savings
- Nine selectable SMBus addresses so multiple devices can share the same SMBus
- 3.3V or 2.5V operation
- Commercial temperature range (0°C to +70°C)
- 72-pin 10mm × 10mm QFN package
- GREEN, RoHS, and PFOS compliant

## Applications

- PCI Express timing (Gen1/2/3) in Intel platforms, specifically the Romley platform
- SATA / SAS timing (storage)
- ESI and SMI systems (storage)
- Intel Quickpath Interconnect

## Key Specifications

- Cycle-to-cycle jitter (PLL mode): <35ps
- Output-to-output skew: <35ps
- Input-to-output delay (PLL mode): Fixed at 0ps
- Input-to-output delay variation (PLL mode): 13ps
- Phase Jitter, PCIe Gen3: 0.25ps
- Accumulated Jitter, QPI 9.6Gb/s: <0.15ps


## Ordering Information

Part Number	Marking	Shipping	Ambient Temperature Range	Package <sup>(1)</sup>
MDB1900ZBQY TR	MDB1900ZBQ	Tape and Reel	-40°C to +85°C	72-Pin 10mm × 10mm QFN
MDB1900ZBQZ TR	MDB1900ZBQ	Tape and Reel	0°C to +70°C	72-Pin 10mm × 10mm QFN

**Note:**

1. Device is GREEN, RoHS, and PFOS compliant. Lead finish is 100% matte tin.

## Pin Configuration

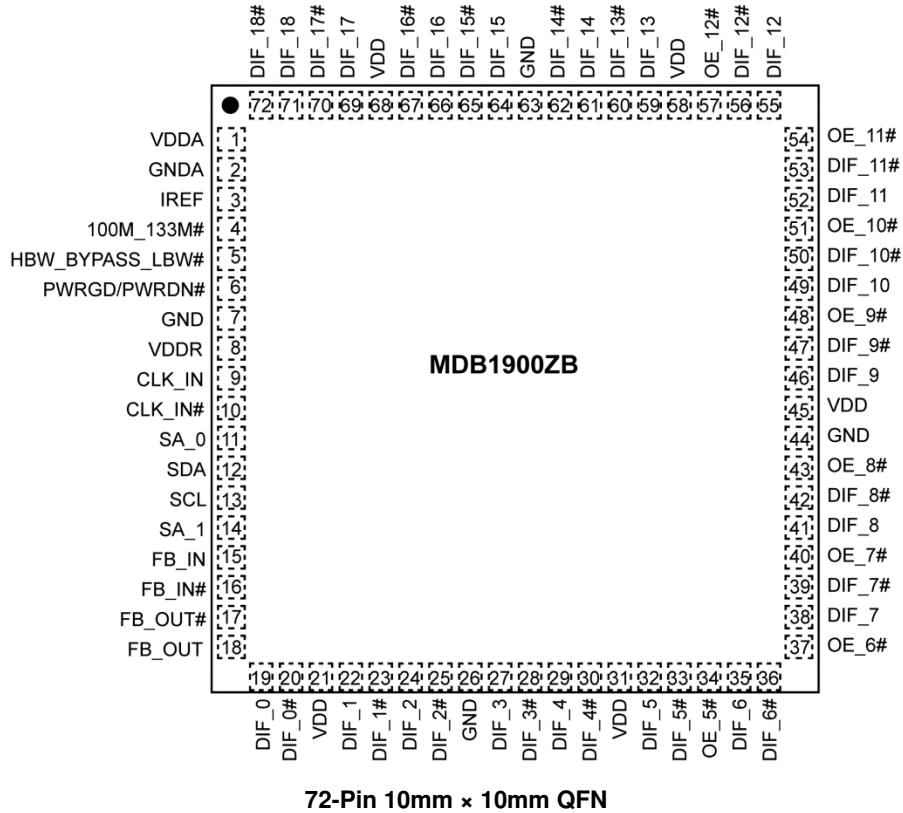

## Pin Description

Pin Number	Pin Name	Type <sup>(2)</sup>	Pin Function
1	VDDA	PWR	3.3V or 2.5V Core Power Supply.
2	GNDA	GND	Core Ground.
3	IREF	I	$I_{REF} = (1.1V)/(R_{REF})$ . A precision resistor ( $R_{REF}$ ) is attached to this pin and to ground to set the reference current for the differential current mode output pairs. $R_{REF} = 475\Omega$ for $100\Omega$ trace, $R_{REF} = 412\Omega$ for $85\Omega$ trace.
4	100M_133M#	I, SE	3.3V LVTTL Input. Input/output frequency select. Logic 1 = 100MHz output (default, $50K\Omega$ pull-up resistor) Logic 0 = 133.33MHz output
5	HBW_BYPASS_LBW#	I, SE	Tri-level input for selecting bypass or PLL bandwidth mode. High = High PLL bandwidth mode Mid = Bypass mode Low = Low PLL bandwidth mode
6	PWRGD/PWRDN#	I, SE	3.3V LVTTL Input for power good and power-down control. $50K\Omega$ pull-down resistor.
7	GND	GND	Ground.
8	VDDR	PWR	3.3V or 2.5V power supply for differential clock input.
9	CLK_IN	I, DIF	0.7V HCSL differential clock input reference. True input pin.
10	CLK_IN#	I, DIF	0.7V HCSL differential clock input reference. Complementary input pin.
11	SA_0	I, SE	Tri-level input to set SMBus address for this device. Works together with SA_1.
12	SDA	I/O	Open Collector SMBus Data I/O Pin (SDATA). 5V tolerant.
13	SCL	I, SE	SMBus Slave Clock Input (SCLK). 5V tolerant.
14	SA_1	I, SE	Tri-level input to set SMBus address for this device. Works together with SA_0.
15	FB_IN	I, DIF	ZDB Feedback, 0.7V differential clock input, true input pin.
16	FB_IN#	I, DIF	ZDB Feedback, 0.7V differential clock input, complementary input pin.
17	FB_OUT	O, DIF	ZDB Feedback, 0.7V differential clock output (HCSL-compatible), true output pin.
18	FB_OUT#	O, DIF	ZDB Feedback, 0.7V differential clock output (HCSL-compatible), complementary output pin.
19	DIF_0	O, DIF	0.7V Differential Clock Output 0 (HCSL-compatible), true output pin.
20	DIF_0#	O, DIF	0.7V Differential Clock Output 0 (HCSL-compatible), complementary output pin.
21	VDD	PWR	3.3V or 2.5V Power Supply.
22	DIF_1	O, DIF	0.7V Differential Clock Output 1 (HCSL-compatible), true output pin.
23	DIF_1#	O, DIF	0.7V Differential Clock Output 1 (HCSL-compatible), complementary output pin.
24	DIF_2	O, DIF	0.7V Differential Clock Output 2 (HCSL-compatible), true output pin.

**Note:**

2. I = Input
- O = Output
- I/O = Bi-directional
- SE = Single-ended
- DIF = Differential
- PWR = 3.3V or 2.5V power
- GND = Ground

## Pin Description (Continued)

Pin Number	Pin Name	Type <sup>(2)</sup>	Pin Function
25	DIF_2#	O, DIF	0.7V Differential Clock Output 2 (HCSL-compatible), complementary output pin.
26	GND	GND	Ground.
27	DIF_3	O, DIF	0.7V Differential Clock Output 3 (HCSL-compatible ), true output pin.
28	DIF_3#	O, DIF	0.7V Differential Clock Output 3 (HCSL-compatible ), complementary output pin.
29	DIF_4	O, DIF	0.7V Differential Clock Output 4 (HCSL-compatible), true output pin.
30	DIF_4#	O, DIF	0.7V Differential Clock Output 4 (HCSL-compatible), complementary output pin.
31	VDD	PWR	3.3V or 2.5V power supply.
32	DIF_5	O, DIF	0.7V Differential Clock Output 5 (HCSL-compatible), true output pin.
33	DIF_5#	O, DIF	0.7V Differential Clock Output 5 (HCSL-compatible), complementary output pin.
34	OE_5#	I, SE	3.3V LVTTL active-low input for enabling Differential Output 5 (50kΩ pull-down).
35	DIF_6	O, DIF	0.7V Differential Clock Output 6 (HCSL-compatible), true output pin.
36	DIF_6#	O, DIF	0.7V Differential Clock Output 6 (HCSL-compatible), complementary output pin.
37	OE_6#	I, SE	3.3V LVTTL active-low input for enabling Differential Output 6 (50kΩ pull-down).
38	DIF_7	O, DIF	0.7V Differential Clock Output 7 (HCSL-compatible), true output pin.
39	DIF_7#	O, DIF	0.7V Differential Clock Output 7 (HCSL-compatible), complementary output pin.
40	OE_7#	I, SE	3.3V LVTTL active-low input for enabling Differential Output 7 (50kΩ pull-down).
41	DIF_8	O, DIF	0.7V Differential Clock Output 8 (HCSL-compatible), true output pin.
42	DIF_8#	O, DIF	0.7V Differential Clock Output 8 (HCSL-compatible), complementary output pin.
43	OE_8#	I, SE	3.3V LVTTL active-low input for enabling Differential Output 8 (50kΩ pull-down).
44	GND	GND	Ground
45	VDD	PWR	3.3V or 2.5V power supply.
46	DIF_9	O, DIF	0.7V Differential Clock Output 9 (HCSL-compatible), true output pin.
47	DIF_9#	O, DIF	0.7V Differential Clock Output 9 (HCSL-compatible), complementary output pin.
48	OE_9#	I, SE	3.3V LVTTL active-low input for enabling Differential Output 9 (50kΩ pull-down).
49	DIF_10	O, DIF	0.7V Differential Clock Output 10 (HCSL-compatible), true output pin.
50	DIF_10#	O, DIF	0.7V Differential Clock Output 10 (HCSL-compatible), complementary output pin.

## Pin Description (Continued)

Pin Number	Pin Name	Type <sup>(2)</sup>	Pin Function
51	OE_10#	I, SE	3.3V LVTTL active-low input for enabling Differential Output 10 (50kΩ pull-down).
52	DIF_11	O, DIF	0.7V Differential Clock Output 11 (HCSL-compatible), true output pin.
53	DIF_11#	O, DIF	0.7V Differential Clock Output 11 (HCSL-compatible), complementary output pin.
54	OE_11#	I, SE	3.3V LVTTL active-low input for enabling Differential Output 11 (50kΩ pull-down).
55	DIF_12	O, DIF	0.7V Differential Clock Output 12 (HCSL-compatible), true output pin.
56	DIF_12#	O, DIF	0.7V Differential Clock Output 12 (HCSL-compatible), complementary output pin.
57	OE_12#	I, SE	3.3V LVTTL active-low input for enabling Differential Output 12 (50kΩ pull-down).
58	VDD	PWR	3.3V or 2.5V Power Supply.
59	DIF_13	O, DIF	0.7V Differential Clock Output 13 (HCSL-compatible), true output pin.
60	DIF_13#	O, DIF	0.7V Differential Clock Output 13 (HCSL-compatible), complementary output pin.
61	DIF_14	O, DIF	0.7V Differential Clock Output 14 (HCSL-compatible), true output pin.
62	DIF_14#	O, DIF	0.7V Differential Clock Output 14 (HCSL-compatible), complementary output pin.
63	GND	GND	Ground.
64	DIF_15	O, DIF	0.7V Differential Clock Output 15 (HCSL-compatible), true output pin.
65	DIF_15#	O, DIF	0.7V Differential Clock Output 15 (HCSL-compatible), complementary output pin.
66	DIF_16	O, DIF	0.7V Differential Clock Output 16 (HCSL-compatible), true output pin.
67	DIF_16#	O, DIF	0.7V Differential Clock Output 16 (HCSL-compatible), complementary output pin.
68	VDD	PWR	3.3V or 2.5V Power Supply.
69	DIF_17	O, DIF	0.7V Differential Clock Output 17 (HCSL-compatible), true output pin.
70	DIF_17#	O, DIF	0.7V Differential Clock Output 17 (HCSL-compatible), complementary output pin.
71	DIF_18	O, DIF	0.7V Differential Clock Output 18 (HCSL-compatible), true output pin.
72	DIF_18#	O, DIF	0.7V Differential Clock Output 18 (HCSL-compatible), complementary output pin.
ePad	Exposed Pad	GND	The center pad must be connected to the ground plane both for electrical ground and thermal relief.

**Absolute Maximum Ratings<sup>(3)</sup>**

Analog Supply Voltage ( $V_{DDA}$ ) .....	+4.6V
I/O Supply Voltage ( $V_{DD}$ ) .....	+4.6V
Input Low Voltage ( $V_{IL}$ ) .....	-0.5V
Input High Voltage ( $V_{IH}$ ) .....	+4.6V
Storage Temperature ( $T_S$ ) .....	-65°C to +150°C
ESD Rating <sup>(5)</sup> .....	2kV

**Operating Ratings<sup>(4)</sup>**

Supply Voltage ( $V_{DD}, V_{DDA}$ ) .....	+2.375V to +3.465V
Ambient Temperature ( $T_A$ ) .....	0°C to +70°C
Junction Temperature ( $T_J$ ) .....	+125°C
Case Temperature ( $T_C$ ) .....	+110°C
Thermal Resistance, Junction-to-Ambient ( $T_{JA}$ ) Still Air.....	26°C/W

**DC Electrical Characteristics<sup>(6)</sup>**

$V_{DDA} = V_{DD} = 3.3V$  or  $2.5 \pm 5\%$ ,  $T_A = 0^\circ C$  to  $+70^\circ C$ .

Symbol	Parameter	Condition	Min.	Typ.	Max.	Units
$V_{DDA}, V_{DD}$	3.3V or 2.5V Operating Range	$3.3V$ or $2.5V \pm 5\%$	2.375		3.465	V
$V_{IH}$	Input High Voltage	$V_{DD} = 3.3V$ . Single-ended inputs, except SMBus and tri-level inputs.	2		$V_{DD} + 0.3$	V
$V_{IL}$	Input Low Voltage	$V_{DD} = 3.3V$ . Single-ended inputs, except SMBus and tri-level inputs.	GND - 0.3		0.8	V
$I_{IL}$	Input Leakage Current <sup>(7)</sup>	$0 < V_{IN} < V_{DD}$	-5		5	$\mu A$
$V_{IL\_TRI}$	Input Low Voltage (Tri-Level Input)	$V_{DD} = 3.3V$	0		0.9	V
$V_{IM\_TRI}$	Input Mid Voltage (Tri-Level Input)	$V_{DD} = 3.3V$	1.3		1.8	V
$V_{IH\_TRI}$	Input High Voltage (Tri-Level Input)	$V_{DD} = 3.3V$	2.4		$V_{DD}$	V
$C_{IN}$	Input Capacitance <sup>(8)</sup>		1		4.5	pF
$C_{OUT}$	Output Capacitance <sup>(8)</sup>		1		4.5	pF
$L_{PIN}$	Pin Inductance				7	nH
$I_{DD\_3.3V}$	Operating Supply Current ( $I_{DDA} + I_{DD}$ )	All outputs driven.			450	mA
$I_{DD\_3.3PD}$	Power-Down Current	$V_{DD} = 3.3V$ . All differential pairs tri-stated.			43	mA
$V_{DDSMB}$	Nominal SMBus Voltage		2.7		5.5	V
$V_{OLSMB}$	SMBus Output Low Voltage	@ $I_{PULLUP}$			0.4	V
$V_{IHSMB}$	SMBus input High Voltage		2.1		$V_{DDSMB}$	V
$V_{ILSMB}$	SMBus input Low Voltage				0.8	V

**Notes:**

3. Exceeding the absolute maximum ratings may damage the device.
4. The device is not guaranteed to function outside its operating ratings.
5. Devices are ESD sensitive. Handling precautions are recommended. Human Body Model.
6. Specification for packaged product only.
7. Input leakage current. Does not include inputs with pull-up or pull-down resistors.
8. Capacitance value does not include pin capacitance.

## DC Electrical Characteristics<sup>(6)</sup> (Continued)

$V_{DDA} = V_{DD} = 3.3V$  or  $2.5 \pm 5\%$ ,  $T_A = 0^\circ C$  to  $+70^\circ C$ .

Symbol	Parameter	Condition	Min.	Typ.	Max.	Units
$I_{PULLUP(SMBUS)}$	Current-Through Pull-Up Resistance or Current Source		100		470	$\mu A$
$R_{PULLUP(SMBUS)}$	Pull-Up Resistance Value	$V_{DD} = 3.3V \pm 5\%$	4.7		27	$K\Omega$
$T_R(SMBUS)$	Rise Time for SDA and SCL	$(V_{IL(MAX)} - 0.15) \text{ to } (V_{IH(MIN)} + 0.15)$			1000	ns
$T_F(SMBUS)$	Fall Time for SDA and SCL	$(V_{IH(MIN)} + 0.15) \text{ to } (V_{IL(MAX)} - 0.15)$			300	ns

## AC Electrical Characteristics – (CLK\_IN, CLK\_IN#) Clock Input Parameters

$V_{DDA} = V_{DD} = 3.3V$  or  $2.5V \pm 5\%$ ,  $T_A = 0^\circ C$  to  $+70^\circ C$ .

Symbol	Parameter	Condition	Min.	Typ.	Max.	Units
$V_{IH}$ (CLK_IN), (CLK_IN#)	Differential Input High Voltage	Statistical measurement on single-ended signal using oscilloscope $V_{HIGH}$ math function.	660		850	mV
$V_{IL}$ (CLK_IN), (CLK_IN#)	Differential Input Low Voltage	Statistical measurement on single-ended signal using oscilloscope $V_{LOW}$ math function.	-150			mV
$V_{IHMAX}$ (CLK_IN), (CLK_IN#)	Differential Input Maximum Voltage (include overshoot)	Statistical measurement on single-ended signal using absolute value.			1150	mV
$V_{ILMIN}$ (CLK_IN), (CLK_IN#)	Differential Input Minimum Voltage (include undershoot)	Statistical measurement on single-ended signal using absolute value.	-300			mV
$V_{SWING}$ (CLK_IN), (CLK_IN#)	Differential Input Swing (include over / undershoot)	Differential input (peak-to-peak).	300		1450	mV
$V_{ox}$ (CLK_IN), (CLK_IN#)	Crossing Point Input Voltage (absolute)		250		550	mV
$V_{oxv}$ (CLK_IN), (CLK_IN#)	Crossing Point Input Voltage (variation)	Variation of crossing over all edges.			140	mV
Edge Rate (CLK_IN), (CLK_IN#)	Minimum (CLK_IN)/(CLK_IN#) Edge Rate <sup>(9)</sup>	Based on single-ended measurement.	0.35			V/ns
Slew Rise (CLK_IN), (CLK_IN#)	Input Rising Slew Rate <sup>(10)</sup>	Differential measurement	0.70		4	V/ns

### Notes:

9. The minimum input edge rate is 0.35V/ns single-ended or 0.7V/ns differential for both 100MHz and 133.33MHz.
10. The slew rate (0.70V/ns to 4V/ns) measurement on differential waveform for both 100MHz and 133.33MHz.

## AC Electrical Characteristics – (CLK\_IN, CLK\_IN#) Clock Input Parameters (Continued)

V<sub>DDA</sub> = V<sub>DD</sub> = 3.3V or 2.5V ±5%, T<sub>A</sub> = 0°C to +70°C.

Symbol	Parameter	Condition	Min.	Typ.	Max.	Units
Slew Fall (CLK_IN), (CLK_IN#)	Input Falling Slew Rate <sup>(10)</sup>	Differential measurement.	0.70		4	V/ns
DC (CLK_IN), (CLK_IN#)	Input Duty Cycle	Differential measurement.	45		55	%
CY-CY Jitter (CLK_IN), (CLK_IN#)	Cycle-to-cycle Input Jitter				50	ps

## Spread Spectrum (SSC) Specification for Clock Input (CLK\_IN, CLK\_IN#)

Symbol	Parameter	Value
Modulation	Down Spread	(-0.5%) Maximum
Modulation Frequency	Modulation Frequency	30kHz to 33kHz
Modulation Profile	Triangular or Lexmark	(-0.5%) Maximum

## AC Electrical Characteristics – HCSL Outputs

$V_{DDA} = V_{DD} = 3.3V$  or  $2.5V \pm 5\%$ ,  $T_A = 0^\circ C$  to  $+70^\circ C$ .

Symbol	Parameter	Condition (100MHz, 133.33MHz)	Min.	Typ.	Max.	Units
$T_{STAB}$	Clock Stabilization Time <sup>(11)</sup>			160	300	$\mu s$
$L_{ACCURACY}$	Long Accuracy <sup>(12, 13, 14, 15, 16)</sup>				100	ppm
$T_{ABS MIN}$	Absolute Minimum Host CLK Period <sup>(12, 16, 17)</sup>	When ( $-0.5\%$ ) spread spectrum clock input (SSC <sub>ON</sub> ).	(Period – 0.125ns)			ns
$T_{ABS MIN}$	Absolute Minimum Host CLK Period <sup>(12, 16, 17)</sup>	When non-spread spectrum SSC clock input (SSC <sub>OFF</sub> ).	-2.5%			ns
Edge Rate	Edge Rate <sup>(18)</sup>	Measurement from differential waveform.	1.0	2.5	4.0	V/ns
$T_R$	Rise Time <sup>(19, 20)</sup> (see Figure 2)	Single-ended measurement $V_{OL} = 0.175V$ , $V_{OH} = 0.525V$ .	175	225	700	ps
$T_F$	Fall Time <sup>(19, 20)</sup> (see Figure 2)	Single-ended measurement $V_{OH} = 0.525V$ , $V_{OL} = 0.175V$ .	175	225	700	ps

### Notes:

11. This is the time from ramping the power supply, or assertion the PWRGD and when valid CLK\_IN input until the time that stable clocks are output from the device (PLL locked).
12. All long-time accuracy and clock period specifications are guaranteed assuming that the input reference (CLK\_IN, CLK\_IN#) meets the CK410B+ or CK420BQ clock period specifications.
13. The long accuracy is 0ppm, when average only over any integer number of SSC periods.
14. When (SSC<sub>OFF</sub>), using the frequency counter with the measurement interval equal to or greater than 0.15s, target frequencies are 100,000,000Hz, 133,333,333Hz.
15. When (SSC<sub>ON</sub>), using the frequency counter with the measurement interval equal to or greater than 0.15s, target frequencies are 99,750,000Hz, 133,000,000Hz.
16. Measurement taken from differential waveform.
17. The average period over any 1 $\mu s$  period of time must be greater than the minimum and less than the maximum specified period.
18. Measure taken from differential waveform on a component test board. The edge (slew) rate is measured from (-150mV) to (+150mV) on the differential waveform. Scope is set to average. Signal must be monotonic through the  $V_{OL}$  to  $V_{OH}$  region for  $T_R$  and  $T_F$ .
19. Measured from  $V_{OL} = 0.175V$  and  $V_{OH} = 0.525V$ . Only valid for rising clock and falling CLK#. Signal must be monotonic through  $V_{OL}$  to  $V_{OH}$  region for  $T_R$  and  $T_F$ . Measurement taken from single-ended waveform. The translation will be (0.5V/ns minimum to 2V/ns maximum) for single-ended edge rate. Refer to Figure 2.
20. Measurement taken from single-ended waveform.

## AC Electrical Characteristics – HCSL Outputs (Continued)

$V_{DDA} = V_{DD} = 3.3V$  or  $2.5V \pm 5\%$ ,  $T_A = 0^\circ C$  to  $+70^\circ C$ .

Symbol	Parameter	Condition (100MHz, 133.33MHz)	Min.	Typ.	Max.	Units
$\Delta T_R$	Rise Time Variation <sup>(20, 21)</sup>				125	ps
$\Delta T_F$	Fall Time Variation <sup>(20, 21)</sup>				125	ps
$T_{RFM}$	Rise and Fall Time Matching <sup>(20, 21, 22)</sup>	Determined as fraction of $2 \times (T_R - T_F) / (T_R + T_F)$ .			20	%
$V_{HIGH}$	Differential Output High Voltage (typically 0.7V) <sup>(20, 23)</sup>	Statistical measurement on single-ended signal using oscilloscope math function.	660	700	850	mV
$V_{LOW}$	Differential Output Low Voltage (typically 0.0V) <sup>(20, 24)</sup>	Statistical measurement on single-ended signal using oscilloscope math function.	-150	8	50	mV
$V_{OVS}$	Differential Output Maximum Voltage (include overshoot) (see Figure 3)	Statistical measurement on single-ended signal using absolute value.			$V_{HIGH} + 0.3V$	V
$V_{UDS}$	Differential Output Minimum Voltage (include undershoot) (see Figure 3)	Statistical measurement on single-ended signal using absolute value.			$V_{LOW} - 0.3V$	V
$V_{RB}$	Ringback Voltage (see Figure 3)	Statistical measurement on single-ended signal using absolute value (-0.5%) SSC input ( $SSC_{ON}$ ).	0.2			V
$V_{RB}$	Ringback Voltage (see Figure 3)	Statistical measurement on single-ended signal using absolute value non-SSC input ( $SSC_{OFF}$ ).	$V_x \pm 0.2$			V
$V_{OX}$ (Absolute)	Absolute Crossing Point Voltages <sup>(20, 25)</sup>	Statistical measurement on single-ended signal using absolute value.	250		550	mV
Total $\Delta V_{OX}$	Total Variation of $V_{OX}$ Over All Edges <sup>(20, 26)</sup>	Statistical measurement on single-ended signal using absolute value.			140	mV

### Notes:

21. Measured with oscilloscope, averaging off, and using minimum/maximum statistics. Variation is the delta between minimum and maximum.
22. Measured with oscilloscope, averaging on, the difference between the rising edge rate (average) of clock versus the falling edge rate (average) of clock#.
23. A statistical average high value for  $V_{HIGH}$  obtained by using the oscilloscope  $V_{HIGH}$  math function.
24. A statistical average low value for  $V_{LOW}$  obtained by using the  $V_{LOW}$  math function.
25. The crossing point should meet the absolute and relative crossing point specifications simultaneously.
26.  $\Delta V_{OX}$  is defined as the total variation of all crossing voltages of rising CLOCK and falling CLOCK#.

## AC Electrical Characteristics – HCSL Outputs (Continued)

$V_{DDA} = V_{DD} = 3.3V$  or  $2.5V \pm 5\%$ ,  $T_A = 0^\circ C$  to  $+70^\circ C$ .

Symbol	Parameter	Condition (100MHz, 133.33MHz)	Min.	Typ.	Max.	Units
Duty Cycle	Differential Output Duty Cycle <sup>(16)</sup> (see Figure 4)	Measurement from differential waveform (measured at $V_{OX}$ ). PLL Mode	45	50	55	%
Duty Cycle Distortion	Differential Output Duty Cycle Distortion <sup>(16, 31)</sup> (see Figure 4)	Measurement from differential waveform (measured at $V_{OX}$ ). Bypass mode at 100MHz	-2	0	+2	%
$T_{SKW}$	Output-to-Output Delay <sup>(27, 28)</sup> (see Figure 4)	Measured at $V_{OX}$ (common to PLL and bypass mode).		18	35	ps
$T_{PD}$ (CLK_IN) to DIF [18:0]	Input-to-Output Delay <sup>(27, 28)</sup>	Measured at $V_{OX}$ (PLL mode).	-35	$\pm 15$	35	ps
$\Delta T_{PD}$ (CLK_IN) to DIF [18:0]	Input-to-Output Delay Variation <sup>(27)</sup>	Measured at $V_{OX}$ (PLL mode).		13	$ 75 $	ps
CY-CY Jitter DIF_[18:0] DIF#_[18:0]	Cycle-to-Cycle Jitter <sup>(16)</sup>	PLL mode.		25	35	ps
$T_{PD}$ (CLK_IN) to DIF_[18:0]	Input-to-Output Delay <sup>(27)</sup>	Measured at $V_{OX}$ (bypass mode).	0.7		4.5	ns
$\Delta T_{PD}$ (CLK_IN) to DIF_[18:0]	Input-to-Output Delay Variation <sup>(27)</sup>	Measured at $V_{OX}$ (bypass mode) absolute.			$ 225 $	ps
$T_{DTE}$	Random Differential Tracking Error between two devices in Hi BW mode <sup>(29)</sup>	PLL (HBW) mode, no spread spectrum.			3.5	ps
$T_{DSSTE}$	P2P Differential Spread Spectrum Tracking Error between two devices in Hi BW mode <sup>(30)</sup>	PLL (HBW) mode, SSCON.			50	ps

**Notes:**

27. Measured from differential crossing point ( $V_{OX}$ ) to differential crossing point ( $V_{OX}$ ) with scope averaging on to find mean value.  $V_{OX}$  (relative) minimum and maximum are derived using the following:  $V_{OX}$  (relative) minimum =  $0.250 + 0.5 V_{HAVG} - 0.7V$  and  $V_{OX}$  (relative) maximum =  $0.550 - 0.5 (0.7V - V_{HAVG})$ .
28. Measured into fixed 2pF load capacitor. Input to output skew is measured at the first output edge following the corresponding input.
29. This parameter is measured at the outputs of two MDB1900ZB devices in the HBW mode driven by a CK420BQ. The random differential tracking error is the differential phase jitter. It is the accumulated phase jitter, not including the effect of spread spectrum and not shared by the outputs. The jitter is measured into 2pF load cap and from differential cross-point to differential cross-point
30. This is the P2P difference in spread spectrum tracking error between two MDB1900ZB devices in Hi BW mode. The parameter is measured at the output of two MDB1900ZB devices driven by a CK420BQ with SSCON.
31. Duty Cycle Distortion is the difference in duty cycle between the output and the input clock when the device is operated in bypass mode.

## Clock Period – SSC Disabled

SSC <sub>OFF</sub> Center Frequency MHz	Measurement Window							Units
	1 Clock	1μs	0.1s	0.1s	0.1s	1μs	1 Clock	
–JITTER <sub>c-c</sub> Absolute per Minimum	–SSC Short Average Minimum	–ppm Long Average Minimum	0ppm Period	+ppm Long Average Maximum	+SSC Short Average Maximum	+JITTER <sub>c-c</sub> Absolute per Maximum		
100	9.94900		9.99900	10.00000	10.00100		10.05100	ns
133.0	7.44925		7.49925	7.50000	7.50075		7.55075	ns

## Clock Period – SSC Enabled

SSC <sub>ON</sub> Center Frequency MHz	Measurement Window							Units
	1 Clock	1μs	0.1s	0.1s	0.1s	1μs	1 Clock	
–JITTER <sub>c-c</sub> Absolute per Minimum	–SSC Short Average Minimum	–ppm Long Average Minimum	0ppm Period	+ppm Long Average Maximum	+SSC Short Average Maximum	+JITTER <sub>c-c</sub> Absolute per Maximum		
99.75	9.94906	9.99906	10.02406	10.02506	10.02607	10.05107	10.10107	ns
133.0	7.44930	7.44930	7.51805	7.51880	7.51955	7.5830	7.58830	ns

## PLL Bandwidth – Peaking and Phase Jitter ( $SSC_{OFF}$ )

$V_{DDA} = V_{DD} = 3.3V$  or  $2.5V \pm 5\%$ ,  $T_A = 0^\circ C$  to  $+70^\circ C$ .

Symbol	Condition (100MHz, 133.33MHz)	Min.	Typ.	Max.	Units
PLL Jitter Peaking <sup>(32)</sup>	HBW_BYPASS_LBW# = 0 (low bandwidth)			1.0	dB
	HBW_BYPASS_LBW# = 1 (high bandwidth)			1.0	
PLL Bandwidth <sup>(33)</sup>	HBW_BYPASS_LBW# = 0 (low bandwidth)	0.70	1.0	1.4	MHz
	HBW_BYPASS_LBW# = 1 (high bandwidth)	2	3.0	4	
Phase Jitter (PCIe Gen1) <sup>(34, 36, 37)</sup>	PCIe Gen1 (including PLL BW 1.5MHz – 22MHz, damping factor = 0.54, $T_D = 10ns$ , $F_{TRK} = 1.5MHz$ )		16	50	ps(Pk-Pk)
Phase Jitter (PCIe Gen2) <sup>(36, 37, 39)</sup>	PCIe Gen2 (including PLL BW 8MHz – 16MHz, jitter peaking = 3dB, damping factor = 0.54, $T_D = 10ns$ ) (low band, $F < 1.5MHz$ )		0.9	1.75	psRMS
	PCIe Gen2 (including PLL BW 8MHz – 16MHz, jitter peaking = 3dB, damping factor = 0.54, $T_D = 10ns$ ) (high band, $[1.5MHz < F < Nyquist]$ )		1.1	2.0	
Phase Jitter (PCIe Gen3) <sup>(35, 36, 37, 39)</sup>	PCIe Gen3 (including PLL BW 2MHz – 4MHz, CDR = 10MHz) (low band)		1.9	2.5	psRMS
	PCIe Gen3 (including PLL BW 2MHz – 4MHz, CDR = 10MHz) (high band)		0.25	1.0	
Accumulated Jitter (4.8Gbps QPI) <sup>(37, 38, 40)</sup>	QPI, accumulated jitter (4.8Gbps or 6.4Gbps, 100MHz or 133MHz, 12 UI)		0.12	0.25	psRMS
Accumulated Jitter (6.4Gbps QPI) <sup>(37, 38, 40)</sup>	QPI, accumulated jitter (4.8Gbps or 6.4Gbps, 100MHz or 133MHz, 12 UI)		0.14	0.25	psRMS
Accumulated Jitter (8Gbps QPI_SMI) <sup>(37, 38)</sup>	QPI, accumulated jitter (8Gbps, 100MHz, 12 UI)		0.08	0.20	psRMS
Accumulated Jitter (9.6Gbps QPI_SMI) <sup>(37, 38)</sup>	QPI, accumulated jitter (9.6Gbps, 100MHz, 12 UI)		0.06	0.15	psRMS
Accumulated Jitter (4MHz SMI)	SMI, 4MHz accumulated jitter		0.06	0.2	psRMS
Accumulated Jitter (16MHz SMI)	SMI, 16MHz accumulated jitter		0.12	0.5	psRMS

### Notes:


32. Measured as maximum pass band gain. At frequencies with the loop BW, highest point-of-magnification is called PLL jitter peaking.
33. Measured at 3dB down or half-power point.
34. These jitter numbers are defined for a BER of 1E-12. Measured numbers at a smaller sample size have to be extrapolated to this BER target.
35. PCIe Gen3 filter characteristics are subject to final ratification by PCI-SIG. Check with PCI-SIG for latest specification.
36. The damping factor damping factor = 0.54 is implying a jitter peaking of 3dB.
37. Post processed evaluation through Intel-supplied Matlab scripts.
38. Measuring on 100MHz output using the template file in the clock jitter tool.
39. Measuring on 100MHz PCIe SRC output using the template file in the clock jitter tool.
40. Measuring on 100MHz, 133.33MHz output using the template file in the clock jitter tool.

## PLL Bandwidth – Peaking and Phase Jitter ( $SSC_{ON}$ )

$V_{DDA} = V_{DD} = 3.3V$  or  $2.5V \pm 5\%$ ,  $T_A = 0^\circ C$  to  $+70^\circ C$ .


Symbol	Condition (100MHz, 133.33MHz)	Min.	Typ.	Max.	Units
PLL Jitter Peaking <sup>(32)</sup>	HBW_BYPASS_LBW# = 0 (low bandwidth)			1.0	dB
	HBW_BYPASS_LBW# = 1 (high bandwidth)			1.0	
PLL Bandwidth <sup>(33)</sup>	HBW_BYPASS_LBW# = 0 (low bandwidth)	0.70	1.0	1.4	MHz
	HBW_BYPASS_LBW# = 1 (high bandwidth)	2	3.0	4	
Phase Jitter (PCIe Gen1) <sup>(34, 36, 37)</sup>	PCIe Gen1 (including PLL BW 1.5MHz – 22MHz, damping factor = 0.54, $T_D = 10ns$ , $F_{TRK} = 1.5MHz$ )		16	50	ps(Pk-Pk)
Phase Jitter (PCIe Gen2) <sup>(36, 37, 39)</sup>	PCIe Gen2 (including PLL BW 8MHz – 16MHz, Jitter Peaking = 3dB, damping factor = 0.54, $T_D = 10ns$ ) (low band, $F < 1.5MHz$ )		1.0	1.75	psRMS
	PCIe Gen2 (including PLL BW 8MHz – 16MHz, Jitter Peaking = 3dB, damping factor = 0.54, $T_D = 10ns$ ) (high band, [ $1.5MHz < F < \text{Nyquist}$ ])		1.0	2.0	
Phase Jitter (PCIe Gen3) <sup>(35, 36, 37, 39)</sup>	PCIe Gen3 (including PLL BW 2MHz – 4MHz, CDR = 10MHz) (low band)		2.7	3.0	psRMS
	PCIe Gen3 (including PLL BW 2MHz – 4MHz, CDR = 10MHz) (high band)		0.28	1.0	
Accumulated Jitter (4.8Gbps QPI) <sup>(37, 38, 40)</sup>	QPI, accumulated jitter (4.8Gbps or 6.4Gbps, 100MHz or 133MHz, 12 UI)		0.18	0.25	psRMS
Accumulated Jitter (6.4Gbps QPI) <sup>(37, 38, 40)</sup>	QPI, accumulated jitter (4.8Gbps or 6.4Gbps, 100MHz or 133MHz, 12 UI)		0.20	0.25	psRMS
Accumulated Jitter (8Gbps QPI_SMI) <sup>(37, 38)</sup>	QPI, accumulated jitter (8Gbps, 100MHz, 12 UI)		0.09	0.20	psRMS
Accumulated Jitter (9.6Gbps QPI_SMI) <sup>(37, 38)</sup>	QPI, accumulated jitter (9.6Gbps, 100MHz, 12 UI)		0.08	0.15	psRMS
Accumulated Jitter (4MHz SMI)	SMI, 4MHz accumulated jitter		0.12	0.2	psRMS
Accumulated Jitter (16MHz SMI)	SMI, 16MHz accumulated jitter		0.06	0.5	psRMS

## Functional Diagram

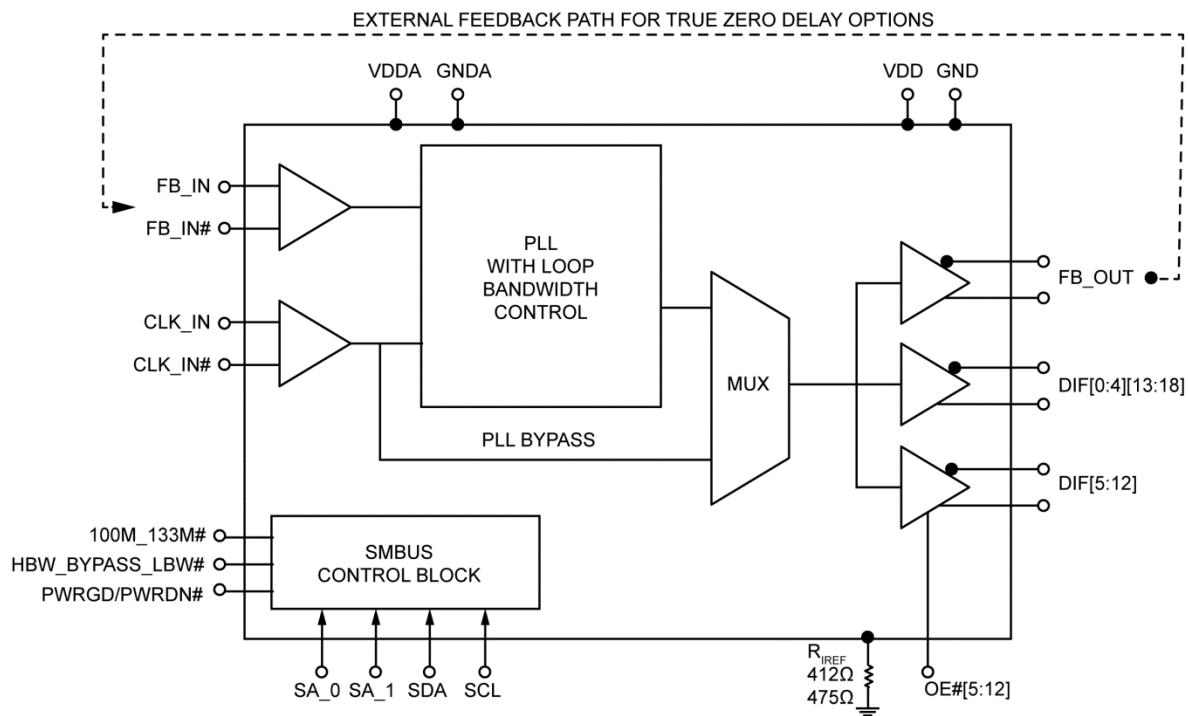

## External Feedback (FB\_OUT, FB\_OUT#) and (FB\_IN, FB\_IN#) Topology

The MDB1900ZB utilizes external feedback topology to achieve low input-to-output delay variation. Place the shunt and series resistors as close to the (FB\_OUT, FB\_OUT#) (Pins 18 and 17) as possible (refer to [Figure 1](#)).

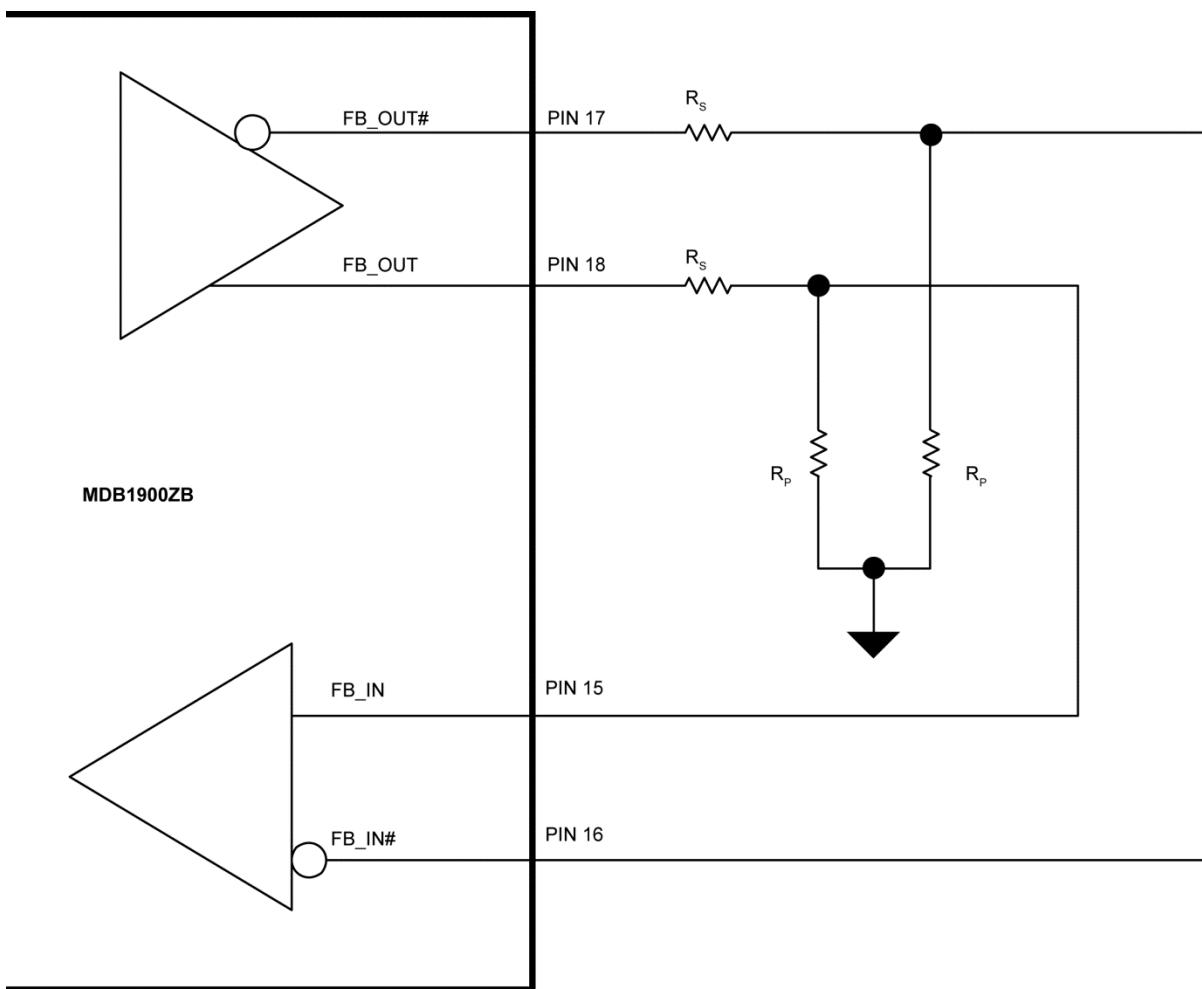


**NOTE:**  
RESISTORS MUST BE LOCATED CLOSE TO FB\_OUT AND FB\_OUT# PINS.

**Figure 1. External Feedback**


**Table 1. Feedback Series and Shunt Resistors**

Board Table Impedance	$R_s$	$R_p$	Units
100	33 (5%)	49.9 (1%)	$\Omega$
85	27 (5%)	42.2 (1%)	$\Omega$


## Measurements Points for Differential

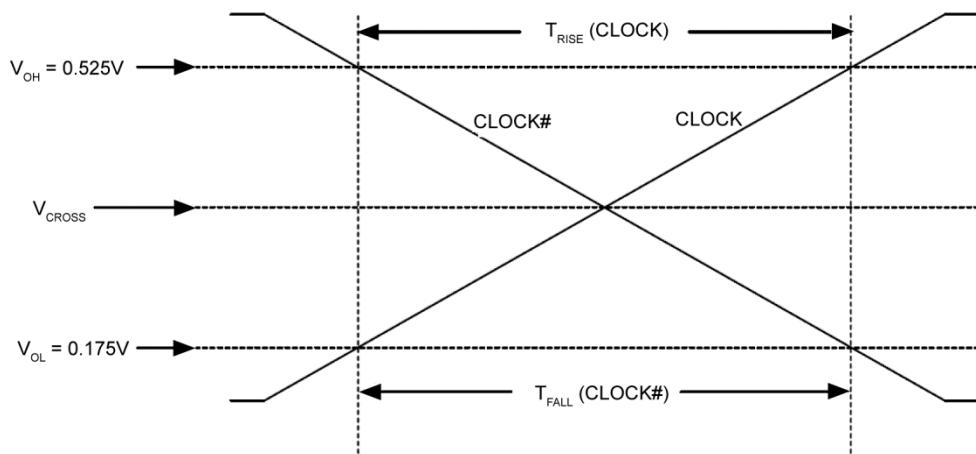

**Figure 2. Single-Ended Measurement Points for  $T_{RISE}$  and  $T_{FALL}$**

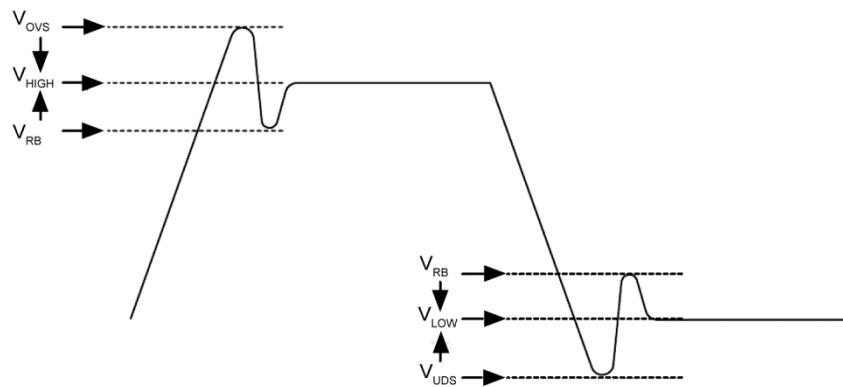

**Figure 3. Single-Ended Measurement Points for  $V_{OVS}$ ,  $V_{UDS}$ , and  $V_{RB}$**

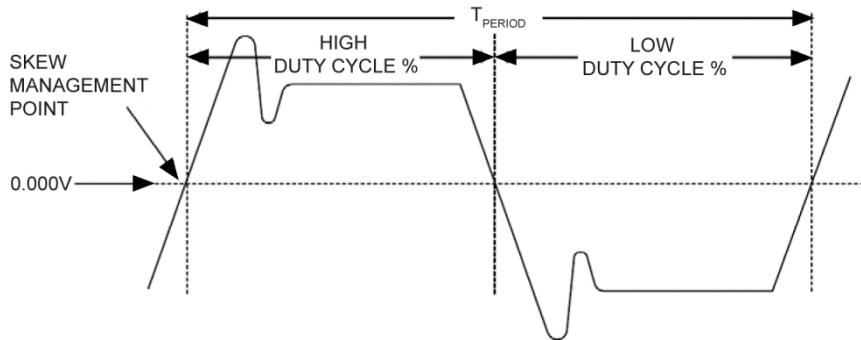

**Figure 4. Differential (Clock/Clock#) Measurement Points for  $T_{PERIOD}$ , Duty Cycle, and Jitter**

## Termination of HCSL [DIF, DIF# (18:0)] Output Buffers for Testing Conditions


All differential output parameters are measured while driving 10in 100Ω or 85Ω differential impedance transmission line segments with 2pF load capacitors at the end of each segment. Measurements are taken across the 2pF load capacitor associated with Clock and Clock# as shown in [Figure 5](#) and [Figure 6](#). For resistive lumped load, board trace impedance and trace length refer to [Table 3](#).

**Table 2. I<sub>REF</sub> and DIF Clock (HCSL) Output Current**


Board Trace Impedance Z	Reference R <sub>IREF</sub> I <sub>REF</sub> = (1.1V) / (R <sub>IREF</sub> )	Output Current (mA)	V <sub>OH</sub> at Z
100Ω	R <sub>IREF</sub> = 475Ω (1%) I <sub>REF</sub> = 2.32mA	I <sub>OH</sub> = (6mA × I <sub>REF</sub> )	0.7V @ 50Ω
85Ω	R <sub>IREF</sub> = 412Ω (1%) I <sub>REF</sub> = 2.67mA	I <sub>OH</sub> = (6mA × I <sub>REF</sub> )	0.7V @ 42.2Ω

**Table 3. Resistive Lumped Test Loads for HCSL Differential Clocks**

Clock	Board Trace Impedance	R <sub>S</sub>	R <sub>P</sub>	R <sub>IREF</sub>	Units	Notes
Clocks (100MHz and 133.33MHz) with 50Ω configuration	100	33 (5%)	49.9 (1%)	475 (1%)	Ω	10in. (maximum) into 2pF load with 100Ω differential impedance.
Clocks (100MHz and 133.33MHz) with 42.5Ω configuration	85	27 (5%)	42.2 (1%)	412 (1%)	Ω	10in. (maximum) into 2pF load with 85Ω differential impedance.

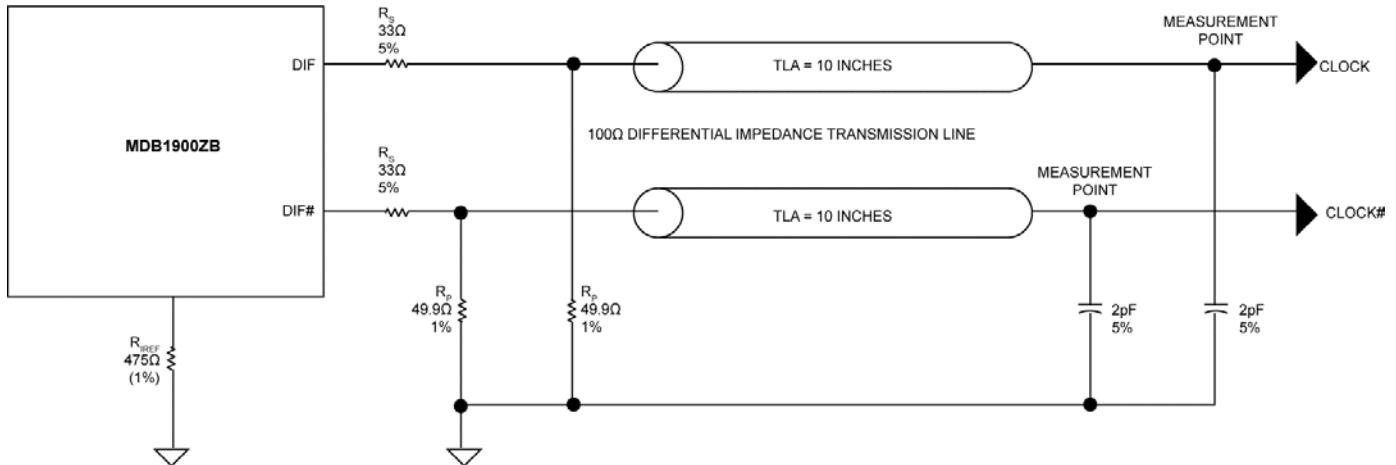

**Figure 5. 0.7V Configuration Test Load Board Termination  
with 100Ω Differential Impedance Transmission Line**

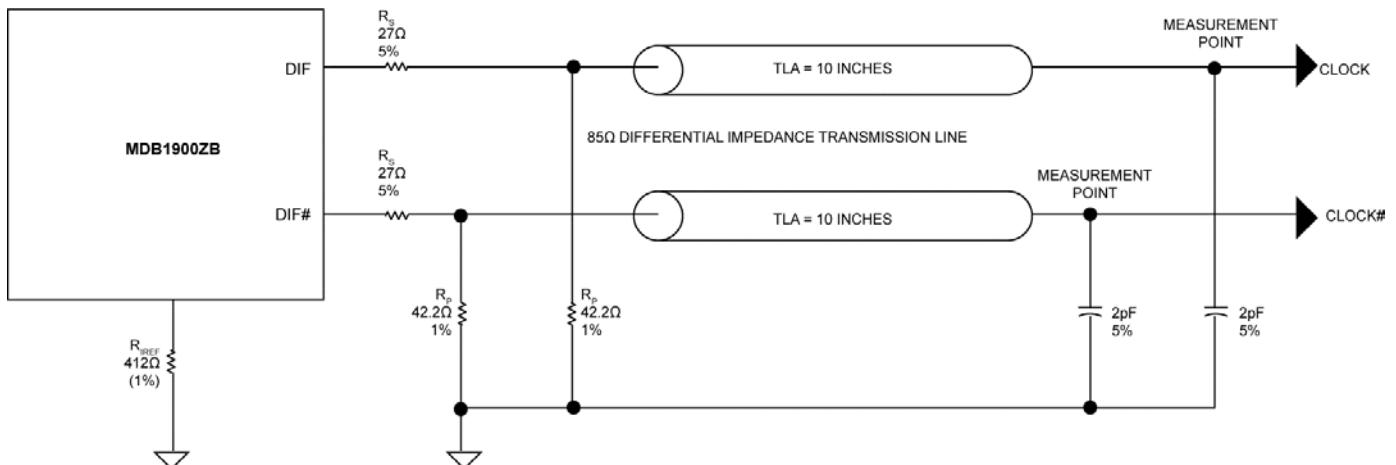

**Figure 6. 0.7V Configuration Test Load Board Termination  
with 85Ω Differential Impedance Transmission Line**

## Functional Description

### CLK\_IN, CLK\_IN# Input Reference

The reference clock (CLK\_IN, CLK\_IN#) is an HCSL (0.7V) differential input with 100MHz or 133.33MHz frequency from CK410B+, CK509B or CK420BQ clock Synthesizer. The input (CLK\_IN, CLK\_IN#) has the option to have spread spectrum ON or spread spectrum OFF. The spread spectrum clocking (SSC) has modulation frequency value of 30kHz – 33kHz, with modulation of -0.5% down-spread (maximum). The modulation profile is Triangular or Lexmark.

### OE# and Output Enables (Control Registers)

OE# pins are dedicated control pins for DIF [12:5] outputs and are asynchronous asserted-low signals. Each output can be individually enabled or disabled by SMBus control register bits. The output enable bits in the SMBus registers are active high and by default are set to enable.

### OE# Assertion (Transition from Logic 1 to Logic 0)

All differential outputs that were tri-stated are to resume normal operation in a glitch free manner. The latency from the assertion to active outputs is 4 – 12 DIF clock periods.

### OE# De-Assertion (Transition from Logic 0 to Logic 1)

The impact of de-asserting OE# is each corresponding differential output will transition from normal operation to tri-state in a glitch free manner. A minimum of four valid clocks will be provided after OE# de-assertion. The maximum latency from the de-assertion to tri-stated outputs is twelve DIF clock periods.

**Table 4. OE Functionality**

Inputs		OE# Hardware Pins and Control Register Bits				Outputs	PLL State
PWRGD/ PWRGD#	CLK_IN/ CLK_IN#	SMBus Enable Bit	OE #	DIF/DIF#_ [12:5]	DIF/DIF#_ [18:13], [4:0]	FB_OUT/ FB_OUT#	
0	X	X	X	Hi-Z	Hi-Z	Hi-Z	ON
1	Running	0	X	Hi-Z	Hi-Z	Running	ON
		1	0	Running	Running	Running	ON
		1	1	Hi-Z	Running	Running	ON

### 100M\_133M# (Frequency Selection)

The 100M\_133M# is a hardware pin which programs the appropriate output frequency. The MDB1900ZB is operated in the 1:1 mode only; therefore the CLK\_IN frequency is equal to DIF [18:0] frequency. The frequency selection can be enabled by 100M\_133M# pin or by SMBus control register bit.

**Note:** The default frequency at power-up is 100MHz.

**Table 5. Frequency Program**

100M_133M#	Optimized Frequency (CLK_IN = DIF_[18:0])
0	133.33MHz
1	100.00MHz (Default)

### PWRGD / PWRDN#

De-assertion of PWRGD (Logic 0) which becomes PWRDN# indicates a power-down mode, which will shut off all clocks cleanly. PWRDN# is asynchronous active low input, and instructs the device to enter power saving mode. PWRDN# should be asserted low prior to shutting off the input clock or power to ensure all clocks shut down in a glitch-free manner, and all outputs will be tri-stated.

**Table 6. PWRGD/PWRGDN# Functionality**


PWRGD/ PWRGDN#	DIF_/DIF# [18:0]	Notes
0	Tri-State	Power-Down Mode
1	Normal	Active Mode

### PWRGD Assertion

The power-up latency is less than 1.8ms. This is the time from the assertion of the PWRGD pin or the ramping of the power supply and the time from valid CLK\_IN input clock until the time that stable clocks are output from the buffer chip (PLL locked).

The assertion and de-assertion of PWRDN# is absolutely asynchronous


**Note:** It is not recommended to disable (CLK\_IN, CLK\_IN#) input prior to assertion of PWRDN# and operation in this mode can result in glitches and excessive frequency shifting.

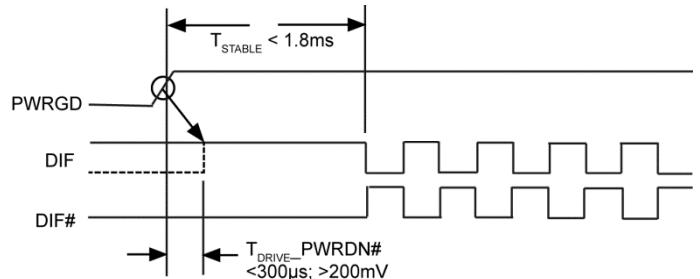

**Figure 7. PWRGD Assertion (Power-Down De-Assertion)**

### PWRDN# Assertion

When PWRDN# is sampled as being asserted by two consecutive rising edges of DIF#, all differential outputs must be tri-stated on the next DIF# high-to-low transition.

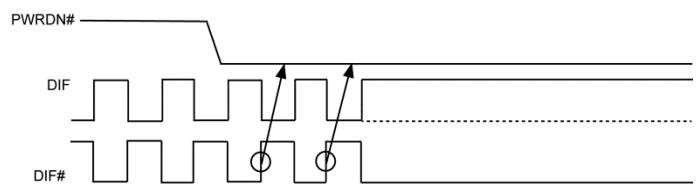

**Figure 8. PWRDN# Assertion**

### HBW\_BYPASS\_LBW#

The HBW\_BYPASS\_LBW# is a tri-level function input pin. It is used to select between PLL high-bandwidth, bypass mode and PLL low bandwidth. The PLL HBW, BYPASS and PLL LBW mode may be selected via writing to SMBus register or by asserting the HBW\_BYPASS\_LBW input pin to the appropriate level per Table 7.

**Table 7. PLL Bandwidth and Readback**

HBW_BYPASS_LBW#	Mode	Byte 0, Bit 7	Byte 0, Bit 6
L (Low)	LBW (Low PLL Bandwidth)	0	0
M (Mid)	BYPASS (Bypass PLL)	0	1
H (High)	HBW (High PLL Bandwidth)	1	1

**SA\_0, SA\_1 (Address Selection)**

SA\_0 and SA\_1 are tri-level hardware pins that can configure the MDB1900ZB to nine different addresses.

**Table 8. SA\_0, SA\_1, and SMBus Address**

<b>SA_1</b>	<b>SA_0</b>	<b>SMBus Address</b>
L	L	D8
L	M	DA
L	H	DE
M	L	C2
M	M	C4
M	H	C6
H	L	CA
H	M	CC
H	H	CE

## MDB1900ZB Control Registers

### SDA, SCL (Pins 12, 13)

The serial data (SDA) and serial clock (SCL) are dedicated for SMBus application and designed for 400Kb/s (maximum).

The SDA and SCL pins do not have internal pull-up resistors. When the device is in power-down mode, the SDA and SCL inputs are tri-stated and all programming information is retained.

All electrical characteristics meet the standard mode specifications of the SMBus 2.0 specification. For SDA and SCL input specs, refer to the [DC Electrical Characteristics](#).

**Table 9. Byte 0: Frequency Select, Output Enable, PLL-Mode Control Register**

Bit	Description	If Bit = 0	If Bit = 1	Type	Default	Pin(s)
7	HBW_BYPASS_LBW# Mode 1	Refer to <a href="#">Table 4</a>	R	Latched at Power-Up	5	5
6	HBW_BYPASS_LBW# Mode 0					
5	Output Enable DIF, DIF#_18	Hi-Z	Enable	RW	1	71, 72
4	Output Enable DIF, DIF#_17	Hi-Z	Enable	RW	1	69, 70
3	Output Enable DIF, DIF#_16	Hi-Z	Enable	RW	1	66, 67
2	Reserved	—	—	—	—	—
1	Reserved	—	—	—	—	—
0	100M_133MHz# Frequency Select	133.33MHz	100MHz	R	Latched at Power-Up	4

**Table 10. Byte 1: Output Enable Control Register**

Bit	Description	If Bit = 0	If Bit = 1	Type	Default	Pin(s)
7	Output Enable DIF, DIF#_[7]	Hi-Z	Enabled	RW	1	38, 39
6	Output Enable DIF, DIF#_[6]	Hi-Z	Enabled	RW	1	35, 36
5	Output Enable DIF, DIF#_[5]	Hi-Z	Enabled	RW	1	32, 33
4	Output Enable DIF, DIF#_[4]	Hi-Z	Enabled	RW	1	29, 30
3	Output Enable DIF, DIF#_[3]	Hi-Z	Enabled	RW	1	27, 28
2	Output Enable DIF, DIF#_[2]	Hi-Z	Enabled	RW	1	24, 25
1	Output Enable DIF, DIF#_[1]	Hi-Z	Enabled	RW	1	22, 23
0	Output Enable DIF, DIF#_[0]	Hi-Z	Enabled	RW	1	19, 20

**Table 11. Byte 2: Output Enable Control Register**

<b>Bit</b>	<b>Description</b>	<b>If Bit = 0</b>	<b>If Bit = 1</b>	<b>Type</b>	<b>Default</b>	<b>Pin(s)</b>
7	Output Enable DIF, DIF#[15]	Hi-Z	Enabled	RW	1	64, 65
6	Output Enable DIF, DIF#[14]	Hi-Z	Enabled	RW	1	61, 62
5	Output Enable DIF, DIF#[13]	Hi-Z	Enabled	RW	1	59, 60
4	Output Enable DIF, DIF#[12]	Hi-Z	Enabled	RW	1	55, 56
3	Output Enable DIF, DIF#[11]	Hi-Z	Enabled	RW	1	52, 53
2	Output Enable DIF, DIF#[10]	Hi-Z	Enabled	RW	1	49, 50
1	Output Enable DIF, DIF#[9]	Hi-Z	Enabled	RW	1	46, 47
0	Output Enable DIF, DIF#[8]	Hi-Z	Enabled	RW	1	41, 42

**Table 12. Byte 3: OE# Pin Real-time Readback Control Register**

<b>Bit</b>	<b>Description</b>	<b>If Bit = 0</b>	<b>If Bit = 1</b>	<b>Type</b>	<b>Default</b>	<b>Pin(s)</b>
7	Real-Time Readback of OE_12#	OE_5# Low	OE_5# High	R	Real-Time	57
6	Real-Time Readback of OE_11#	OE_6# Low	OE_6# High	R	Real-Time	54
5	Real-Time Readback of OE_10#	OE_7# Low	OE_7# High	R	Real-Time	51
4	Real-Time Readback of OE_9#	OE_8# Low	OE_8# High	R	Real-Time	48
3	Real-Time Readback of OE_8#	OE_9# Low	OE_9# High	R	Real-Time	43
2	Real-Time Readback of OE_7#	OE_10# Low	OE_10# High	R	Real-Time	40
1	Real-Time Readback of OE_6#	OE_11# Low	OE_11# High	R	Real-Time	37
0	Real-Time Readback of OE_5#	OE_12# Low	OE_12# High	R	Real-Time	34

**Table 13. Byte 4: Reserved Control Register**

<b>Bit</b>	<b>Description</b>	<b>If Bit = 0</b>	<b>If Bit = 1</b>	<b>Type</b>	<b>Default</b>	<b>Pin(s)</b>
7	Reserved	–	–	–	–	–
6	Reserved	–	–	–	–	–
5	Reserved	–	–	–	–	–
4	Reserved	–	–	–	–	–
3	Reserved	–	–	–	–	–
2	Reserved	–	–	–	–	–
1	Reserved	–	–	–	–	–
0	Reserved	–	–	–	–	–

**Table 14. Byte 5: Vendor/Revision Identification Control Register**

<b>Bit</b>	<b>Description</b>	<b>If Bit = 0</b>	<b>If Bit = 1</b>	<b>Type</b>	<b>Default</b>	<b>Pin(s)</b>
7	Revision Code Bit 3	–	–	R	Vendor Specific (contact factory for details)	–
6	Revision Code Bit 2	–	–	R		–
5	Revision Code Bit 1	–	–	R		–
4	Revision Code Bit 0	–	–	R		–
3	Vendor ID Bit 3	–	–	R	0	–
2	Vendor ID Bit 2	–	–	R	0	–
1	Vendor ID Bit 1	–	–	R	1	–
0	Vendor ID Bit 0	–	–	R	1	–

**Table 15. Byte 6: Device ID Control Register**

<b>Bit</b>	<b>Description</b>	<b>If Bit = 0</b>	<b>If Bit = 1</b>	<b>Type</b>	<b>Default</b>	<b>Pin(s)</b>
7	Device ID 7 (MSB)	Device ID is 0xDB (Hex), or 219 (Decimal)	–	R	1	–
6	Device ID 6		–	R	1	–
5	Device ID 5		–	R	0	–
4	Device ID 4		–	R	1	–
3	Device ID 3		–	R	1	–
2	Device ID 2		–	R	0	–
1	Device ID 1		–	R	1	–
0	Device ID 0		–	R	1	–