



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts,Customers Priority,Honest Operation,and Considerate Service",our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



Syr-line TMR48D

Digital Timer

Front Panel 48x48 (1/16 DIN)



- › Large LED or LCD Screen (13.2 mm)
- › Multi-function and single-function
- › Basic & Advance configuration modes
- › Multi-range (0.05 s – 9999 h)
- › Multi-voltage (24-240 V AC/DC)
- › 1 or 2 relay outputs (Changeover)
- › Memory option in event of a break in supply
- › Lock function
- › Up or down timing
- › DIN Sized (48x48 mm) Housing
- › Compact body (63 mm long)
- › Water & Dust-proof (IP66)
- › 8-Pins & 11-Pins connections




Standard Version
(MDE1)



Performance Version
(MDA2, MDF1, GDF1, GDS2)

Product Selection

Type	Part Number	Function	Connections	Output	Supply Voltage	Screen
MDE1	MDE1R0524U	A, B, C, H, D, Di	8-Pins	1 x 5A	24 V AC/DC	LCD
MDE1	MDE1R05MVA	A, B, C, H, D, Di	8-Pins	1 x 5A	100-240 V AC/DC	LCD
MDA2	MDA2R10MV2	A	8-Pins	2 x 10A	24-240 V AC/DC	LED
MDF1	MDF1R10MV2	A, Ac, Ad, B, C, H, L, Li, D, Di	8-Pins	1 x 10A	24-240 V AC/DC	LED
GDF1	GDF1R10MV2	A, Ac, Ad, B, C, H, L, Li, D, Di	11-Pins	1 x 10A	24-240 V AC/DC	LED
GDS2	GDS2R10MV2	A, Ab, Ac, Ad, AMt, At, B, C, H, Ht, L, Li, T, W, D, Di	11-Pins	2 x 10A	24-240 V AC/DC	LED

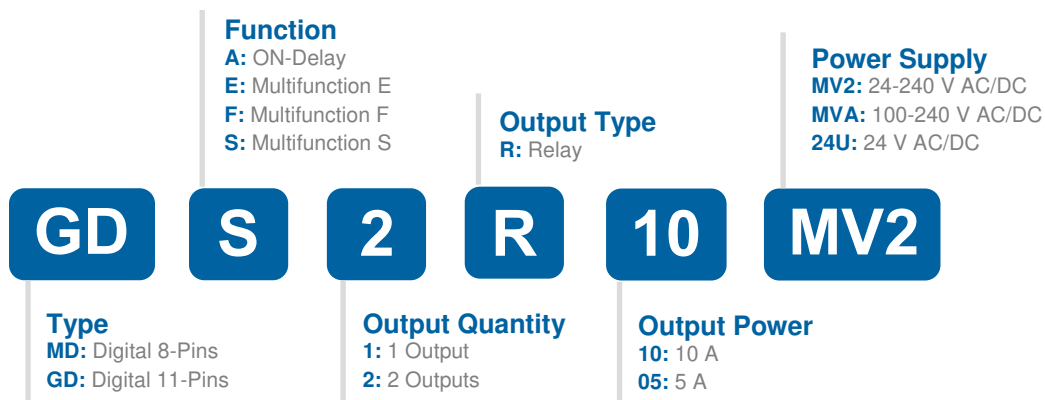

Description:

The new Syr-line Digital Timers has higher precision and many programming features with the biggest screen ever seen in the timer relays' market and the most intuitive programming for ease to use and fast configuration

For more information about the Syr-line TMR48D Digital Timer please visit www.crouzet.com.

Input Specifications

Description	MDE1...24U	MDE1...MVA	GDF1	MDF1	MDA2	GDS2
Rated supply voltage Un	24 V AC/DC	100-240 V AC/DC	24-240 V AC/DC	24-240 V AC/DC	24-240 V AC/DC	24-240 V AC/DC
Voltage supply tolerance	-15 %, +10 %					
AC supply voltage frequency	50 / 60 Hz +/- 5%					
Galvanic isolation of supply / inputs	No					
Max power consumption @ Un	2.5 VA (VAC) 1 W (VDC)					
Immunity to power micro cuts	10 ms					

Timing Specifications

Description	MDE1...24U	MDE1...MVA	GDF1	MDF1	MDA2	GDS2
Specified time ranges (10)	IEC 1812-1: 0.001 s to 9.999 s, 0.01 s to 99.99 s, 0.1 s to 999.9 s, 1 s to 9999 s, 1 s to 99 min 59 s, 0.1 min to 999.9 min, 1 min to 9999min, 1 min to 99h 59 min, 0.1 h to 999.9 h, 1 h to 9999 h					
Minimum control pulse duration	IEC 1812-1: 1 ms or 20 ms selectable					
Recovery time (after by de-energization)	IEC 1812-1: 120 ms Max					
Repeatability	IEC 1812-1: $\leq \pm 0.03 \% \pm 20 \text{ ms (VDC) / } 50 \text{ ms (VAC)}$					
Setting Accuracy	IEC 1812-1: $\leq \pm 0.03 \% \pm 20 \text{ ms (VDC) / } 50 \text{ ms (VAC)}$					
Temperature drift	$\leq \pm 0.03 \% \pm 20 \text{ ms (VDC) / } 50 \text{ ms (VAC)}$					
Voltage drift	$\leq \pm 0.03 \% \pm 20 \text{ ms (VDC) / } 50 \text{ ms (VAC)}$					

Output Specifications

Description	MDE1...24U	MDE1...MVA	GDF1	MDF1	MDA2	GDS2
Contact arrangement	1 CO (SPDT)		1 CO (SPDT)		2 CO (SPDT)	
Maximum switching voltage	250 VAC / 30 VDC		250 VAC / 10 A resistive / 125 VDC / 0.3 A resistive		250 VAC / 10 A resistive / 125 VDC / 0.3 A resistive	
Switching current rate (resistive)	NO: 5A 250 VAC / 5 A 30 VDC - NC: 3A 250 VAC / 3 A 30 VDC		NO / NC: 10 A 250 VAC / 10 A 30 VDC		NO/NC: 2x10 A @ 40 °C 250 V AC / 2x10 A @ 40 °C 30 VDC NO / NC: 2x8 A @ 60 °C 250 V AC / 2x8A @ 60 °C 30 VDC	
Maximum switching power (resistive)	NO: 1250 VA / 150 W – NC: 750 VA / 90 W		2500 VA / 300 W		2 x 2500 VA / 2 x 300 W	
Electrical life at nominal switching current rate (resistive)	1x10 ⁵ cycles NO 7x10 ⁴ cycles NC		1x10 ⁵ cycles (10 A 250 VAC resistive)		1x10 ⁵ cycles (10 A 250 VAC resistive)	
Minimum switching contact	10 mA / 12 VDC					
Maximum rate (at max switching power)	360 cycles /hour					
Mechanical life	10 x 10 ⁶ cycles					
Dielectric strength between open contacts	1 kV / 1 min / 1 mA / 50 Hz					

Insulation Specifications

Description	MDE1...24U	MDE1...MVA	GDF1	MDF1	MDA2	GDS2
Rated Insulation voltage	IEC 60664-1: 300 V					
Insulation coordination	IEC 60664-1: Overvoltage category III; pollution degree 2					
Rated impulse voltage	IEC 60664-1: 4 kV (1.2/50 μ s)					
Clearance / Creepage distances	IEC 60664-1: 3 mm / 3.2 mm					
Dielectric strength	EN-61812-1: 2.5 kV / 1 min / 1 mA / 50 Hz					
Insulation Resistance	NFC 93 050: > 500 M Ω / 250 VDC / 1min					

General Specifications

Description	MDE1...24U	MDE1...MVA	GDF1	MDF1	MDA2	GDS2
Display	4 digits per value 7 segments LCD	4 digits per value 7 segments LCD	4 digits per value 7 segments LCD with backlight	4 digits per value 7 segments LCD with backlight	4 digits per value 7 segments LCD with backlight	4 digits per value 7 segments LCD with backlight
Memory backup	EEPROM (rewrite 1,000,000 times min, 40 years data hold min)					
Casing	48x48 mm (1/16 DIN)					
Mounting position	All positions					
Mounting	Mounting Front panel, by clip Mounting base-mounted on socket					
Housing material	UL94: enclosure plastic type V0					
Degree of protection (Front Face)	IEC 60529: IP66 with front panel seal					
Degree of protection (Housing)	IEC 60529: IP20					
Operating temperature	IEC 60068-2: -10 °C to +60 °C					
Storage temperature	IEC 60068-2: -30 °C to +70 °C					
Humidity	IEC 60068-2-30: 93 % without condensation					
Vibration resistance	IEC 60068-2-6: \pm 0.15 mm 10 Hz - 60 Hz 2 g 60 Hz - 150 Hz					
Shock resistance	IEC60068-2-27: 15 gn – 11 ms, 3 x 6 axis (Output non-energized) 5gn – 11 ms, 3 x 6 axis (Output energized)					
Drop to concrete floor	IEC 60068-2-32: Height: 0.75 m					
Weight	Approx. 105 g (150 g with packing)					

Standards Specifications

Description	MDE1...24U	MDE1...MVA	GDF1	MDF1	MDA2	GDS2
EU Directives	2014/30/EU: EMC, 2014/35/EU: Low voltage					
Approvals / Marking	CE, cULus Listed Industrial Control Equipment					
Security standard	IEC 60664-1: Insulation coordination for equipment within low-voltage systems					
Conformity with environmental directives	2015/863/UE: RoHS 1907/2006: Reach 2012/19/UE: WEEE					
Product standard	IEC 61812-1: Specified time relays for industrial use UL 508 (60947-4-1): Industrial Control Equipment (NRNT- Industrial Control Switches)					
Immunity to electrostatic discharges	Level III Air +/-8 KV / Contact +/-6 KV					
Immunity to radiated, radio-frequency, electromagnetic field	IEC61000-4-3: Level III, 10 V/m (80 MHz to 1 GHz) 80% AM (1 kHz), 3 V/m (1.4 to 2 GHz) 80% AM (1 kHz), 1 V/m (2 to 2.7 GHz) 80% AM (1 kHz)					
Immunity to rapid transient bursts	IEC 61000-4-4: Level IV, direct +/-4 kV (power supply) / capacitive coupling clamp +/-2 KV, (command input and outputs)					
Immunity to shock waves on power supply	IEC 61000-4-5: Level III, line-to-earth +/-2 kV / line-to-line +/-1 kV					
Immunity to radiofrequency in common mode	IEC 61000-4-6: Level III, 10 Vrms (0,15 to 80 MHz) 80% AM (1 kHz)					
Immunity to voltage dips and breaks	IEC 61000-4-11: Industrial Class II, 0 % residual voltage during 1 cycle AC power ports, 70 % residual voltage during 25/30 cycles AC power ports, 0 % residual voltage, 250/300 cycles AC power ports. Residential: 0 % residual voltage during 10 cycle AC power ports, 40 % residual voltage during 10 cycles AC power ports, 70 % residual voltage during 10 cycles AC power ports, 0 % residual voltage, 250/300 cycles AC power ports					
AC/DC main port emissions	EN55022 / CISPR22 Class B EN 55011 / CISPR11 Class B, Group 1					
Radiated emissions	EN55022 / CISPR22 Class B EN 55011 / CISPR11 Class B, Group 1					

Accessories


Socket for DIN Rail or Panel Mount



Plug-In 8-Pins

25 622 130

Socket for DIN Rail or Panel Mount



Plug-In 11-Pins

25 622 080

Socket with Screw Terminal



Plug-In 8-Pins

25 622 203

Solder Plug



Plug-In 8-Pins

25 622 301

Solder Plug



Plug-In 11-Pins

25 622 076

Socket with Screw Terminal




Plug-In 11-Pins

79 694 002


Diagrams

Wiring Diagrams


MDE1...24U

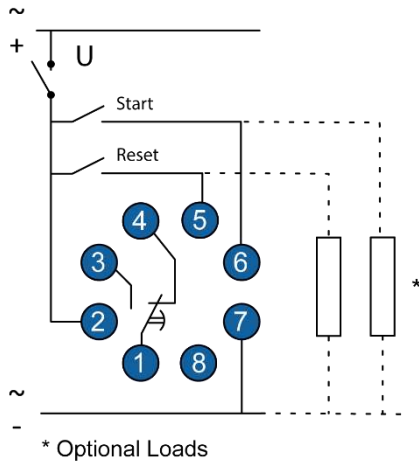


MDE1...MVA

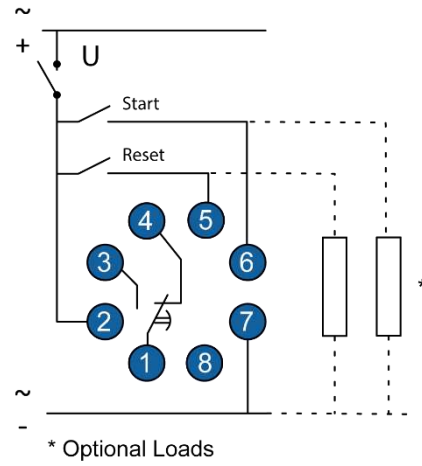


MDF1

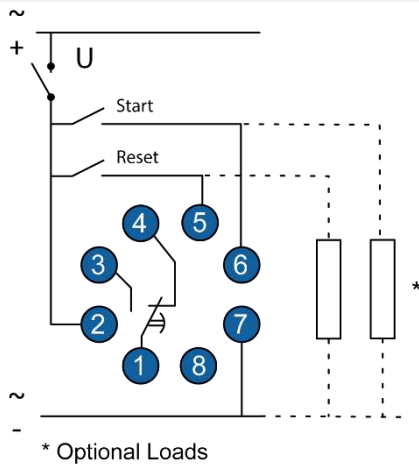


GDF1

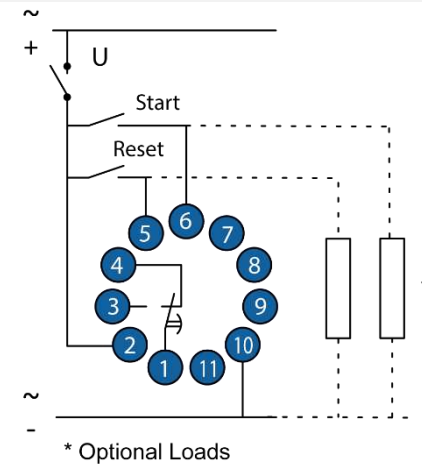

MDA2

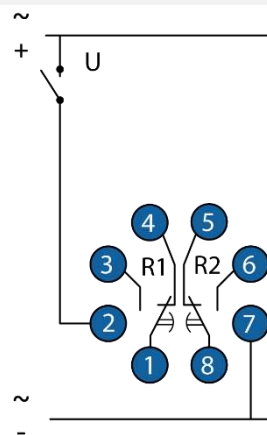



GDS2

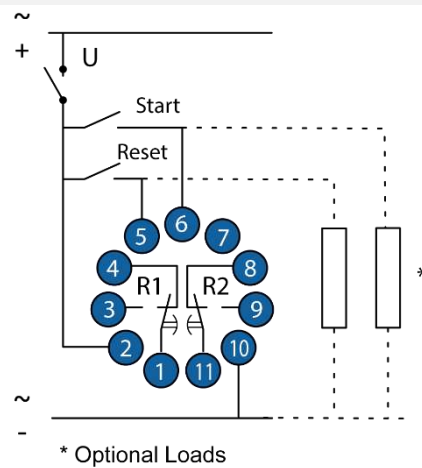

Dimensions in(mm)



Side View

Front View

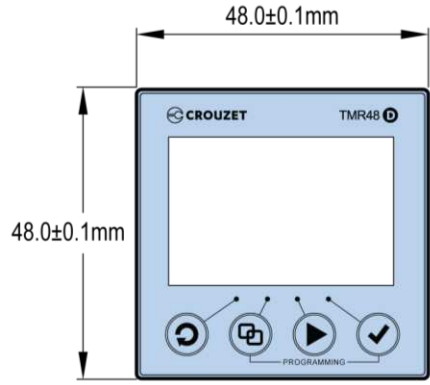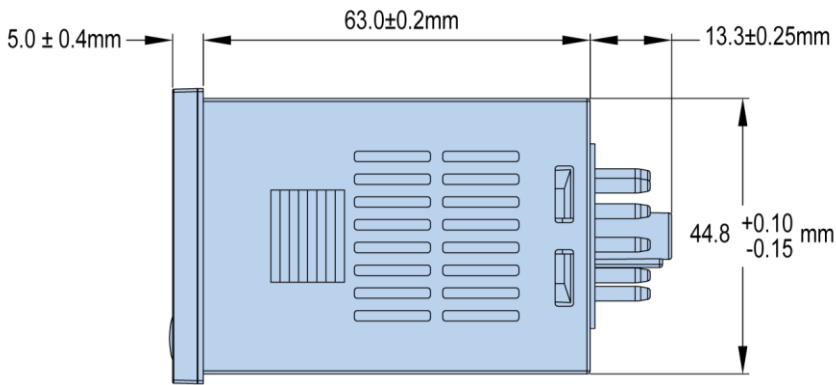

Mounting

Panel Cut-Out

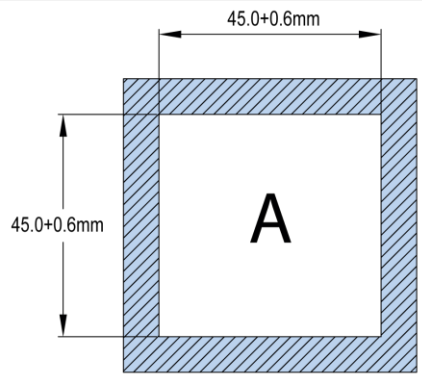
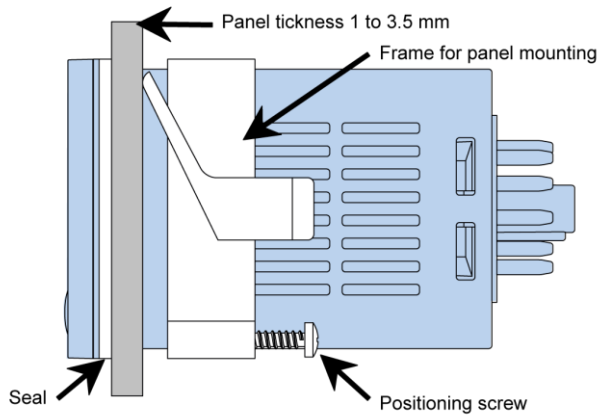


Basic Time Chart



Detailed Time Chart

A

FUNCTION A: On-Delay (Delay on make)

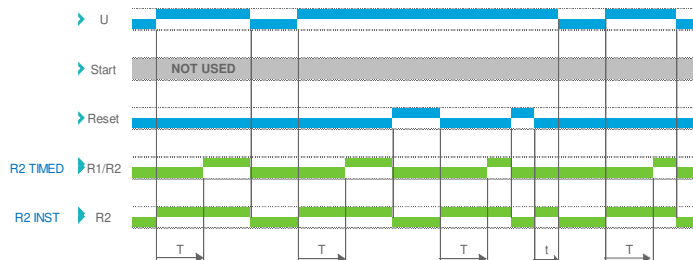
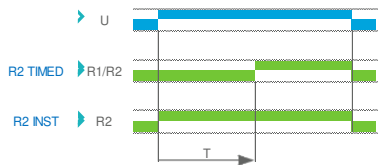


FUNCTION A + Memory Option

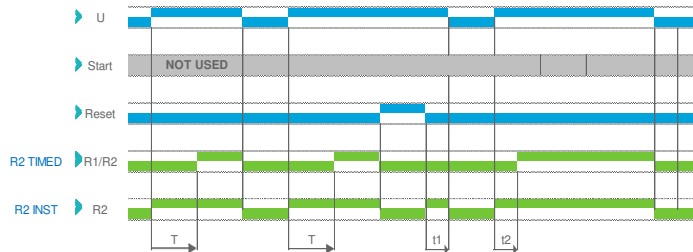
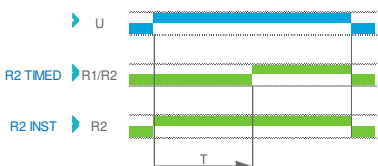


Ab

FUNCTION Ab: Delayed Interval

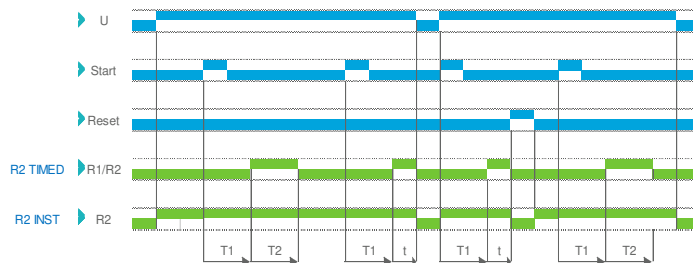
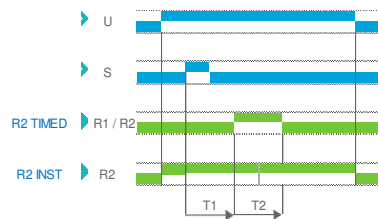


FUNCTION Ab + Memory Option

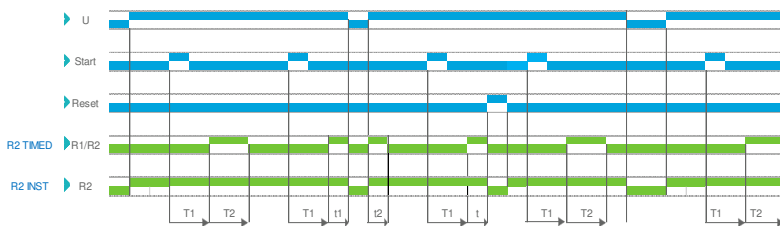
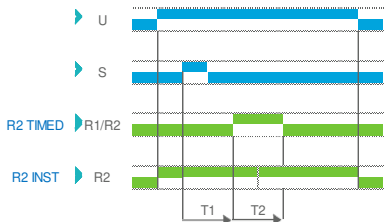


Ac

FUNCTION Ac: On/Off Delay (Delay on make/break)

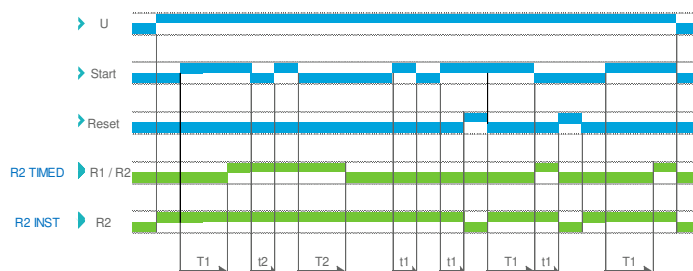
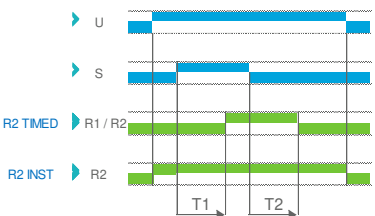


FUNCTION Ac + Memory Option

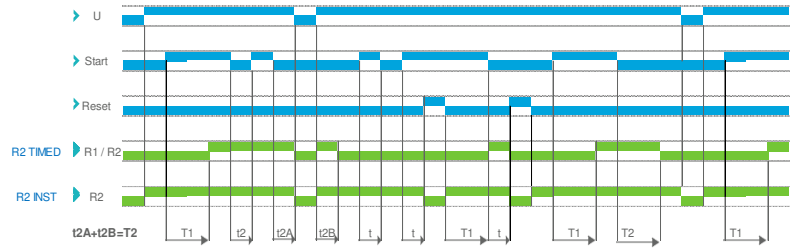
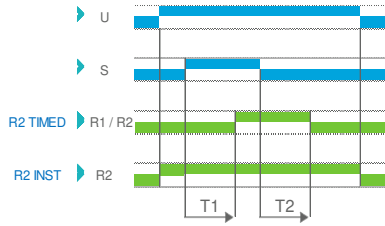


FUNCTION Ad: Delay on Start

Ad

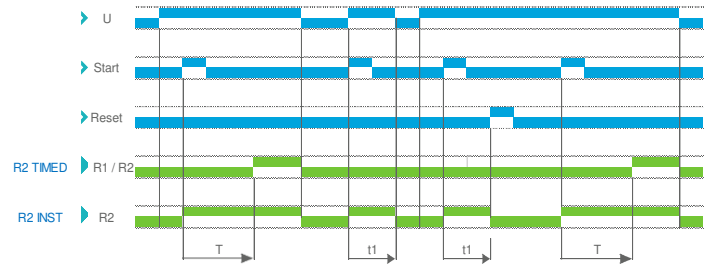
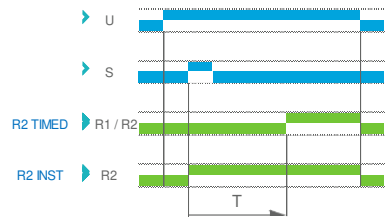


FUNCTION Ad + Memory Option

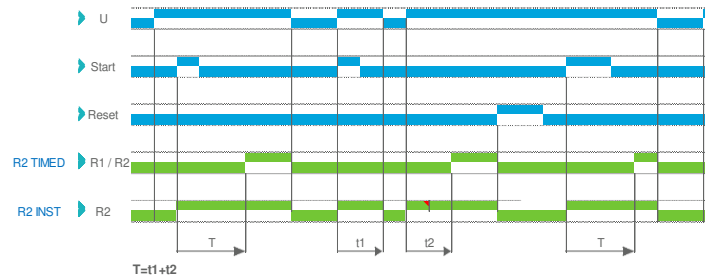
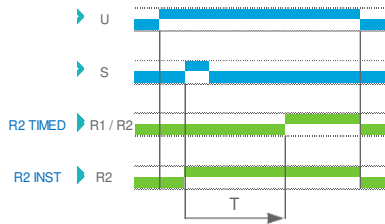


FUNCTION At: Summation Time Relay

At

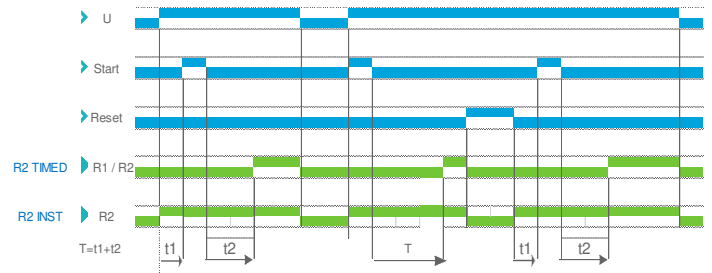
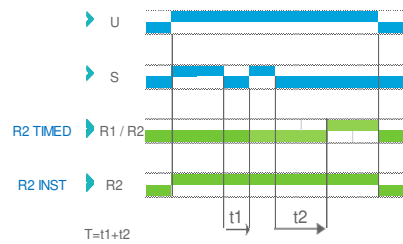


FUNCTION At + Memory Option

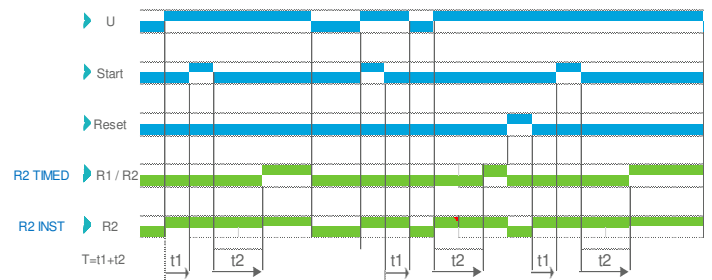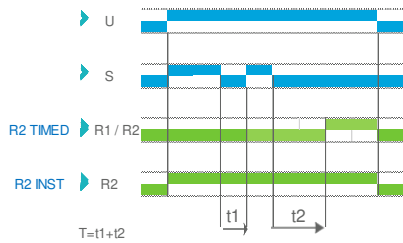



FUNCTION AMt: On-Delay (Delay on make, Total memory: one delay)

AMt

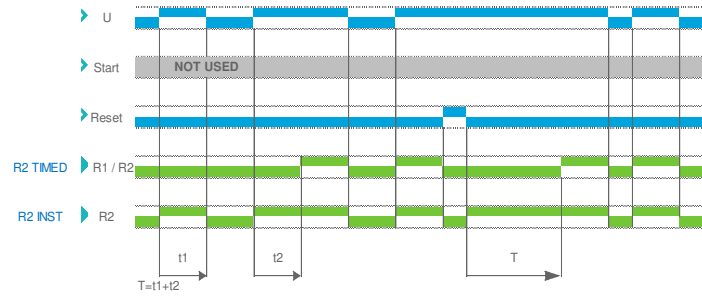
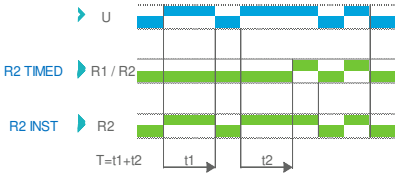


FUNCTION B: One-Shot

B

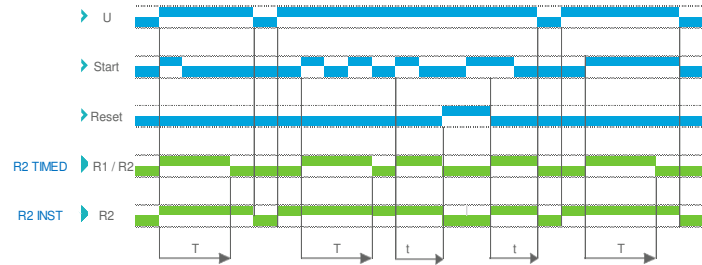
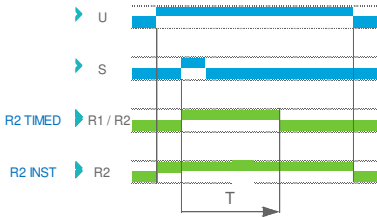


FUNCTION B + Memory Option

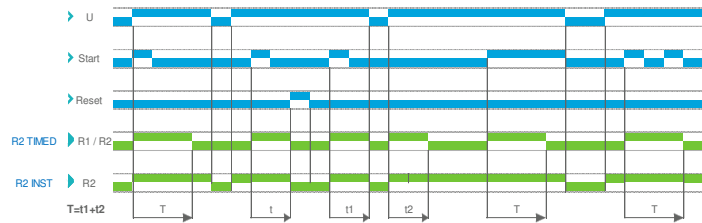
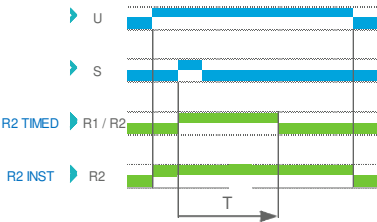


FUNCTION C: Off-Delay (Delay on break)

C

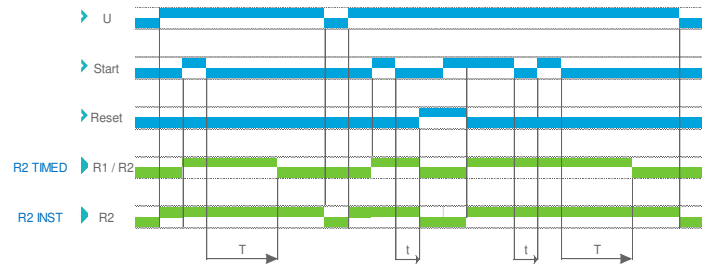
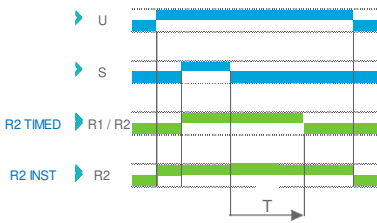


FUNCTION C + Memory Option

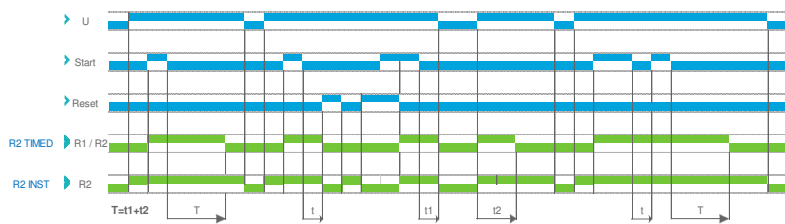
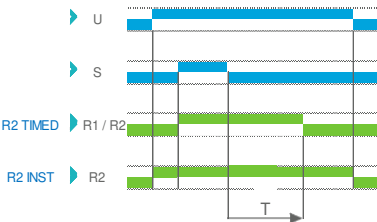


FUNCTION H: Interval

H

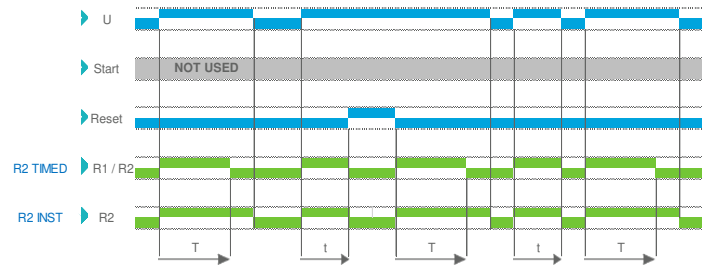
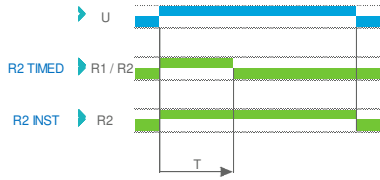


FUNCTION H + Memory Option

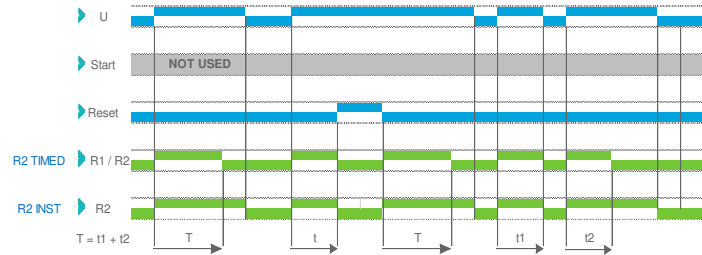
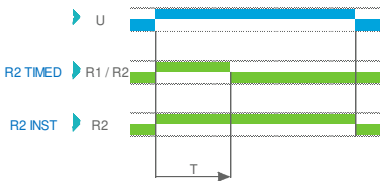


FUNCTION Ht: interval summation time relay

Ht

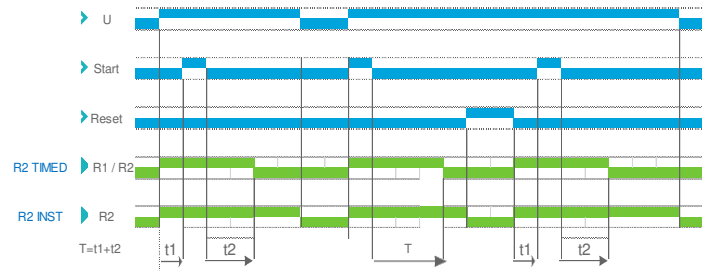
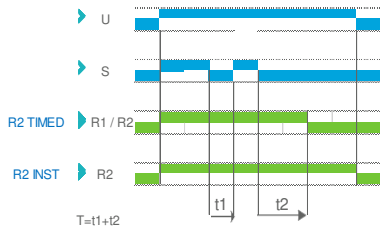


FUNCTION Ht + Memory Option

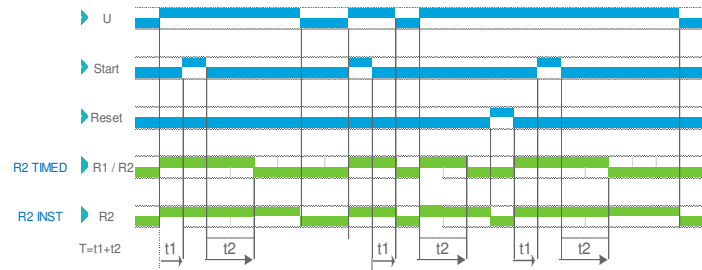
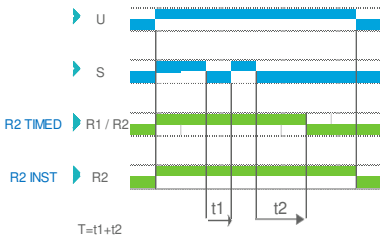


FUNCTION L: Recycler (OFF Start)

L

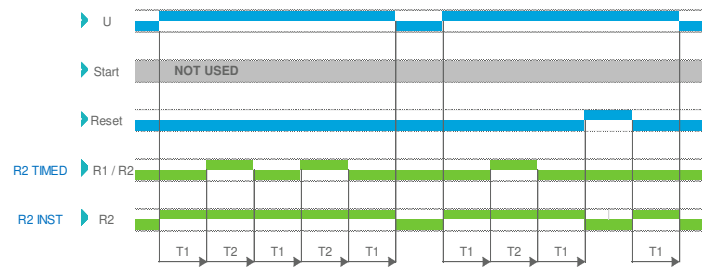
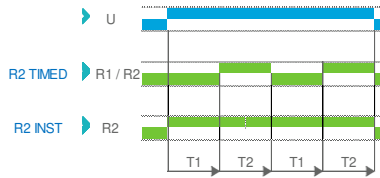


FUNCTION L + Memory Option

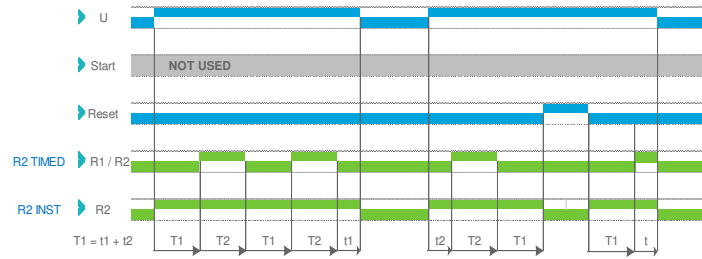
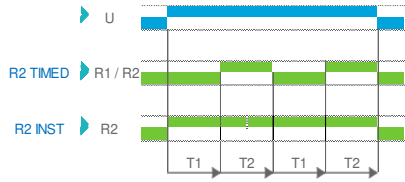


FUNCTION Li: Recycler (ON Start)

Li

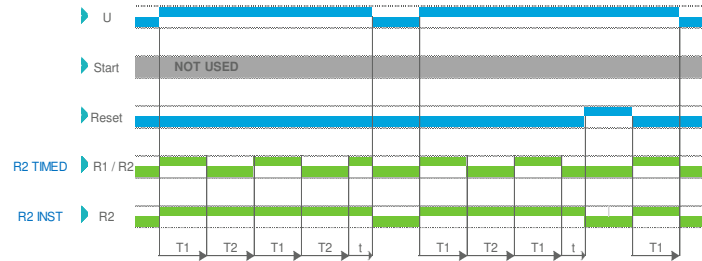
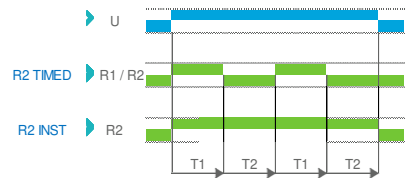


FUNCTION Li + Memory Option

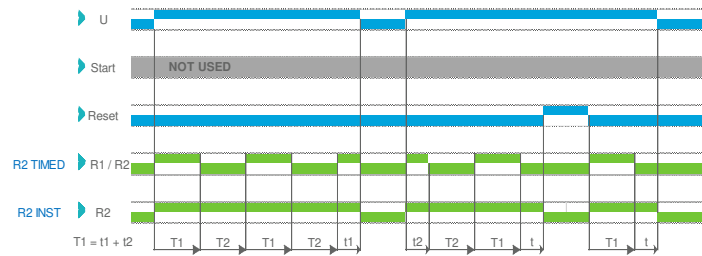
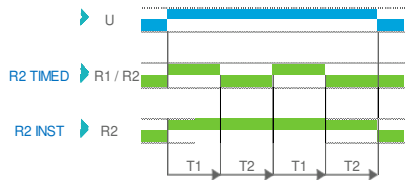


FUNCTION T: On-Delay (Delay on make): sum of times

T

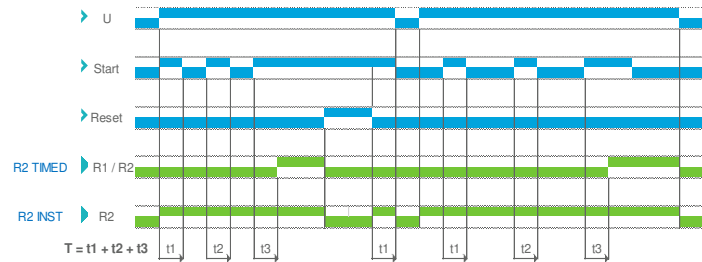
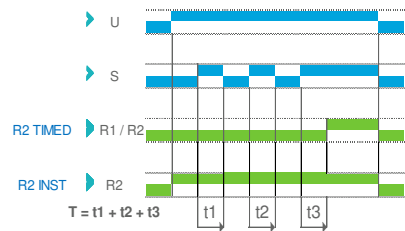


FUNCTION T + Memory Option

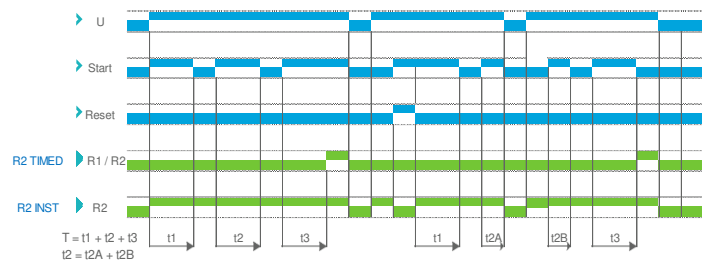
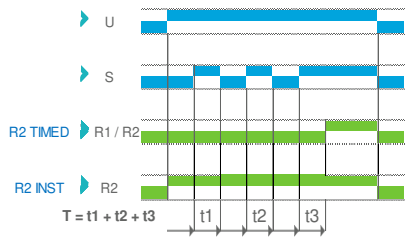


FUNCTION W: Timing after pulse of control contact

W

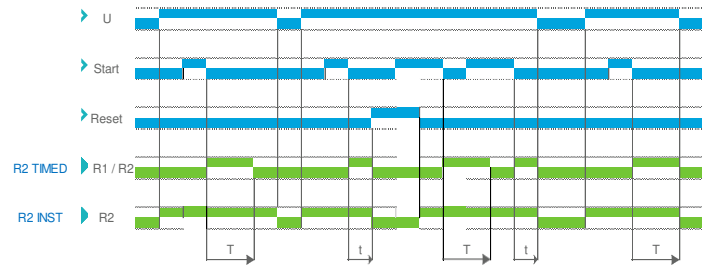
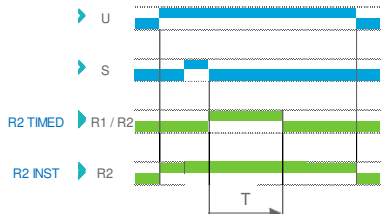


FUNCTION W + Memory Option

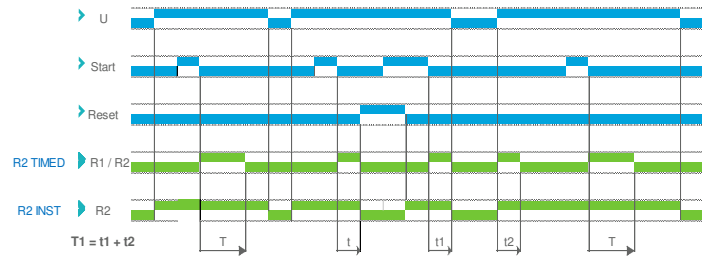
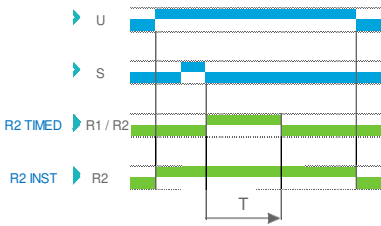


FUNCTION D: Symmetrical flashing (OFF start)

D

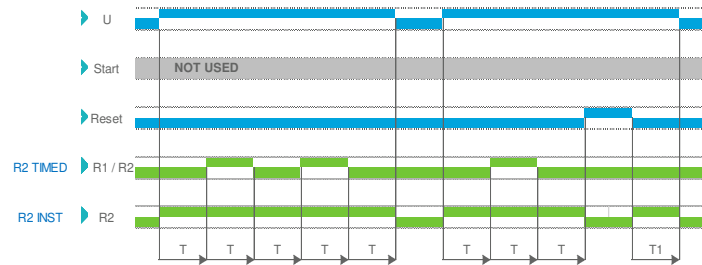
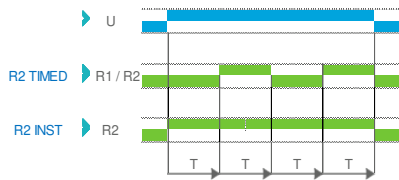


FUNCTION D + Memory Option

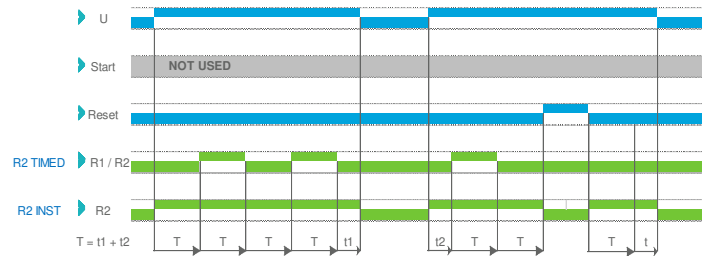
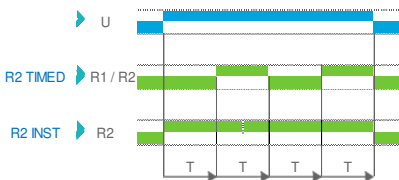


FUNCTION Di: Symmetrical flashing (ON start)

Di

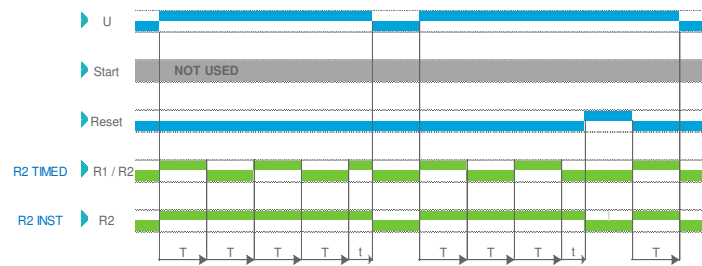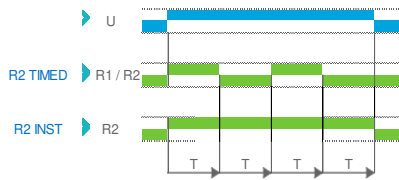


FUNCTION Di + Memory Option

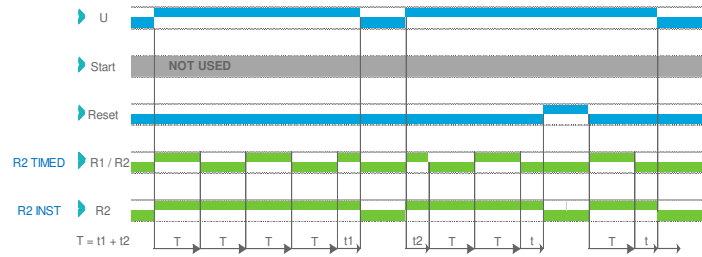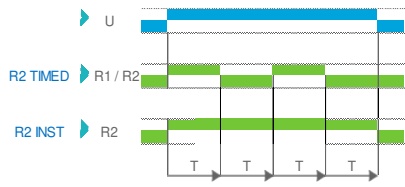


Keys Function


Set Time

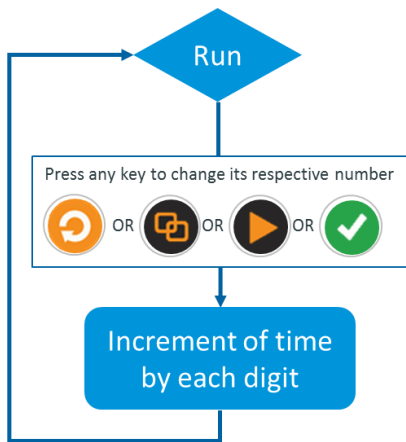


Check Configured Time and Function

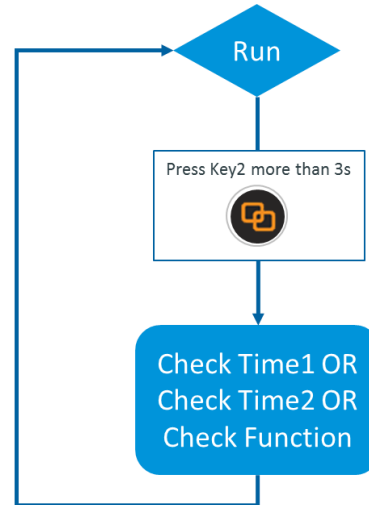

Reset Time

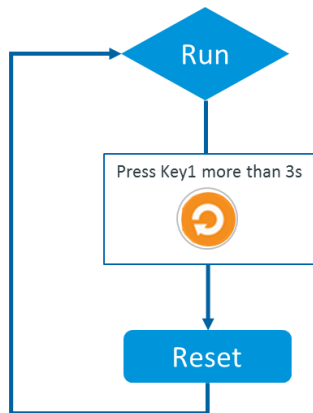

Programming Mode

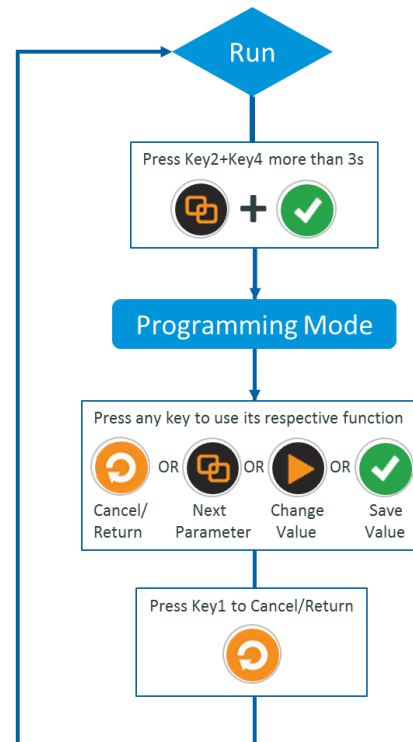

Programming Mode

Programming Main Menu		
#	Parameter	Value
1	PASS Pass If "Lock" function is on, pass needs to be entered	0000 0000
2	bASIC_ProG Basic Prog Enter to Basic Programming Mode	
3	ADVANCED_ProG Advanced Prog Enter to Advanced Programming Mode	
4	tEST Test Enter to Test Mode	

Basic Prog Menu																										
#	Parameter	Value																								
1	FUncti on Function Select the timing function	<table border="0"> <tr> <td>A</td><td>Ab</td><td>Ac</td><td>Ad</td><td>AMt</td><td>At</td><td>b</td><td>C</td> </tr> <tr> <td>H</td><td>Ht</td><td>L</td><td>Li</td><td>d</td><td>di</td><td>t</td><td>ū</td> </tr> <tr> <td>H</td><td>Ht</td><td>L</td><td>Li</td><td>D</td><td>Di</td><td>T</td><td>W</td> </tr> </table>	A	Ab	Ac	Ad	AMt	At	b	C	H	Ht	L	Li	d	di	t	ū	H	Ht	L	Li	D	Di	T	W
A	Ab	Ac	Ad	AMt	At	b	C																			
H	Ht	L	Li	d	di	t	ū																			
H	Ht	L	Li	D	Di	T	W																			
2	tI NE_rAnGE Time Range Select the timing range	<table border="0"> <tr> <td>-.---s</td><td>---.---s</td><td>---.---s</td><td>---s</td><td>---m---s</td> </tr> <tr> <td>-.---s</td><td>---s</td><td>---s</td><td>---s</td><td>--m--s</td> </tr> <tr> <td>---.m</td><td>---m</td><td>---h---m</td><td>---.h</td><td>---h</td> </tr> <tr> <td>---m</td><td>---m</td><td>--h--m</td><td>---.h</td><td>---h</td> </tr> </table>	-.---s	---.---s	---.---s	---s	---m---s	-.---s	---s	---s	---s	--m--s	---.m	---m	---h---m	---.h	---h	---m	---m	--h--m	---.h	---h				
-.---s	---.---s	---.---s	---s	---m---s																						
-.---s	---s	---s	---s	--m--s																						
---.m	---m	---h---m	---.h	---h																						
---m	---m	--h--m	---.h	---h																						
3	CoUnt Count Select the timing count up or down	<table border="0"> <tr> <td>UP</td><td>doūn</td> </tr> <tr> <td>Up</td><td>Down</td> </tr> </table>	UP	doūn	Up	Down																				
UP	doūn																									
Up	Down																									
4	MEMoRY Memory Activate memory option (save timing after power off)	<table border="0"> <tr> <td>oFF</td><td>on</td> </tr> <tr> <td>Off</td><td>On</td> </tr> </table>	oFF	on	Off	On																				
oFF	on																									
Off	On																									
5	oUtPUt_2 Output 2 Select if Out 2 works timed or instantaneous (MDA2, GDS2)	<table border="0"> <tr> <td>tI NE</td><td>I nSt</td> </tr> <tr> <td>Timed</td><td>Instantaneous</td> </tr> </table>	tI NE	I nSt	Timed	Instantaneous																				
tI NE	I nSt																									
Timed	Instantaneous																									

Advanced Prog Menu		
#	Parameter	Value
1	I nPUt_tI NE Input Time Select input time wave	0020 ^s 000 ^{1s} 0.020s 0.001s
2	I nPUt_tYPE Input Type Select input to work with a NPN or PNP signal	PNP nPN PNP NPN
3	tI NE_LI MI t Time Limit Select upper time limit	9999 0000 9999 0000

4	brI GhtnESS Brightness Select screen brightness	100 100%	50 50%			
5	SLEEP AFtEr Sleep After Select the time needed to turn off the screen	oFF Off	5 s 5s	10 s 10s	30 s 30s	60 s 60s
6	LoCK Lock Select security level 1 (lock configuration) or 2 (lock all)	oFF Off	1 1	2 2		
6.1	PASS Pass Set password for lock option	0000 0000				
6.2	done Done Indication that the lock is on					
7	DEFAULt_SEtEtI nGS Default Settings Reset settings to default values	no No	YES Yes			
7.1	SURe Sure Confirm if reset settings to default values	no No	YES Yes			
7.2	done Done Indication that settings have been reset					

Test Mode Menu						
#	Parameter	Value				
1	oUt 1 Out 1 Turn on/off Relay Output 1	oFF Off	oN On			
2	oUt 2 Out 2 Turn on/off Relay Output 2 (MDA2, GDS2)	oFF Off	oN On			
3	dISPLAY Display Turn on/off all display segments	oFF Off	oN On			
4	MEmory Memory Test the memory of the timer	oFF Off	TESt Test			
4.1	Good Good Indication that the memory is working properly					
4.2	Err. Error Indication that the memory is not working properly					

All specifications in this document are subject to change without written notice. Actual product may differ from pictures provided in this document.