



Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from,Europe,America and south Asia,supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of “Quality Parts,Customers Priority,Honest Operation,and Considerate Service”,our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip,ALPS,ROHM,Xilinx,Pulse,ON,Everlight and Freescale. Main products comprise IC,Modules,Potentiometer,IC Socket,Relay,Connector.Our parts cover such applications as commercial,industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



## Contact us


Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China



## Model MDP-X Double Banana Plug, Four Terminal Isolation

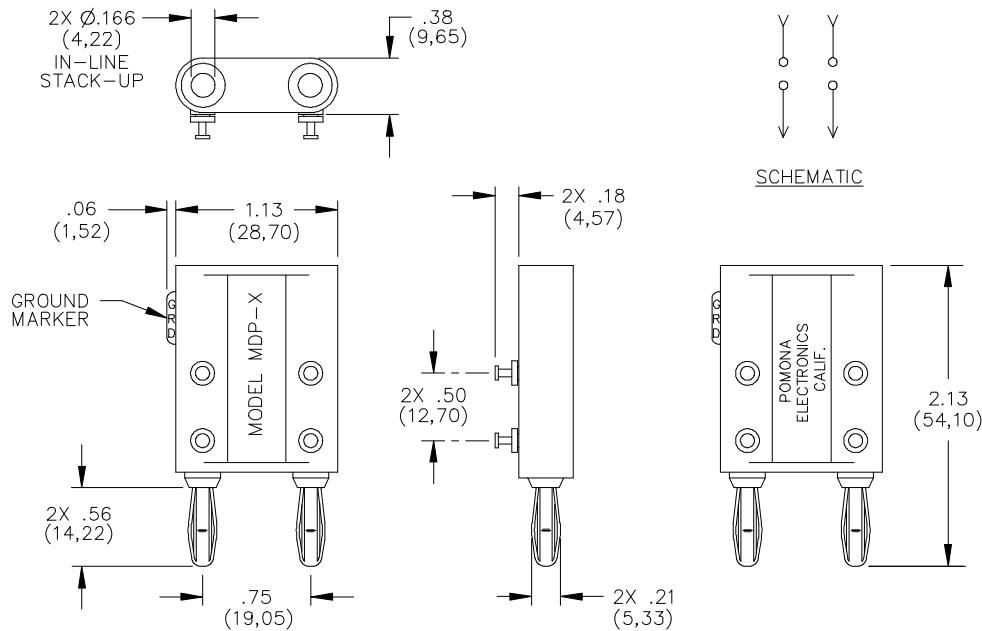

### FEATURES:

- Mates to Model #2269 or any standard double banana jack..
- Provides four terminal isolation.
- Top stack-up receptacles isolated from lower plugs.
- Ideal for insertion of matching network in laboratory VTM's signal generators, etc.
- Bright tin plated solder turret terminals for permanent noise-free connections.

### MATERIALS:

Upper Conn.:

Double Banana Jack

Material: Brass per QQ-B-626, Alloy 360,  
½ Hard.

Finish: Nickel plated by QQ-N-290, Class 2,  
200/300 microinches.

Insulation: Polypropylene molded to plug bodies.

Color: Red.

Marking: "POMONA ELECTRONICS CALIF.  
MODEL MDP-X".

Lower Conn.:

Double Banana Plug

Material: Spring – Beryllium Copper per QQ-C-533, Alloy 172, Cond. HT.

Plug body – Brass per QQ-B-626, Alloy 360, ½ Hard.

Finish: Nickel plated per QQ-N-290, Class 2,  
200/300 microinches.

Solder turret terminals

Material: Brass per QQ-B-626, Alloy 360, ½ Hard.

Finish: Bright tin plated per MIL-T-10727,  
Type I, 100/250 microinches.

### RATINGS:

Operating Temperature: +55°C. (+131°F.) MAX.

Operating Voltage: 2500 V

Current: 15 Amperes

**ORDERING INFORMATION:** Model MDP-X

All dimensions are in inches. Tolerances (except noted): .xx = ±.02" (.51 mm), .xxx = ±.005" (.127 mm).

All specifications are to the latest revisions. Specifications are subject to change without notice.

Registered trademarks are the property of their respective companies.

Made in USA