

Chipsmall Limited consists of a professional team with an average of over 10 year of expertise in the distribution of electronic components. Based in Hongkong, we have already established firm and mutual-benefit business relationships with customers from Europe, America and south Asia, supplying obsolete and hard-to-find components to meet their specific needs.

With the principle of "Quality Parts, Customers Priority, Honest Operation, and Considerate Service", our business mainly focus on the distribution of electronic components. Line cards we deal with include Microchip, ALPS, ROHM, Xilinx, Pulse, ON, Everlight and Freescale. Main products comprise IC, Modules, Potentiometer, IC Socket, Relay, Connector. Our parts cover such applications as commercial, industrial, and automotives areas.

We are looking forward to setting up business relationship with you and hope to provide you with the best service and solution. Let us make a better world for our industry!



Contact us

Tel: +86-755-8981 8866 Fax: +86-755-8427 6832

Email & Skype: info@chipsmall.com Web: www.chipsmall.com

Address: A1208, Overseas Decoration Building, #122 Zhenhua RD., Futian, Shenzhen, China

WE POWER WHAT MATTERS

No.00



- Need a different connector, cable size, product markings? Let SL Power help customize your power supply. Contact us at 1-800-235-5929, or at info@slpower.com

No.02



- 2.1 x 5.5 x 9.5mm straight barrel plug - Center Positive

No.03



- 2.5 x 5.5 x 9.5mm straight barrel plug Center Positive (Standard Models)

No.12



- 5 pin DIN-180 male connector (Pins 3, 5 = (+), pins 1, 2, 4 = (-))

No.22



- 6 pin DIN male connector (Pins 1, 2 = (+), pins 4, 5 = (-))

No.23



- 8 pin DIN male connector (Pins 3, 7 = (+), pins 1, 4, 6, 8 = (-), shell = FG))

No.32



- 9 pin "D" type, female (Pin 8 = (+), pin 5 = (-), all others = NC)

No.33



- 2.5 x 5.5 x 12.5mm straight barrel plug - Center Positive

No.40



- 2.1 x 5.5 x 9.5mm right angle barrel plug (high retention) Center Positive

No.41



- 2.5 x 5.5 x 9.5mm right angle barrel plug (high retention) Center Positive

No.42



- 2.1 x 5.5 x 11mm straight barrel plug (high retention) Center Positive

No.43



- 2.1 x 5.5 x 11mm straight barrel plug (high retention) Center Positive

No.44



- 2.1 x 5.5 x 9.5mm straight barrel plug, locking - Center Positive

No.45



- 902.5 x 5.5 x 9.5mm straight barrel plug, locking Center Positive

No.48



- 3 pin Snap n Lock, Kycon Kpp-3P or equivalent (Pin 1 = (+), pin 2 = (-))

No.49



- 4 pin Snap n Lock, Kycon Kpp-4P or equivalent (Pins 1, 3 = (+), pins 2, 4 = (-))

No.51



- 6 pin Minifit - Molex 39-01-2060 or equivalent (Pins 1, 4 = (+), pins 3, 6 = (-))

No.65



- Stripped and Tinned Leads

No.70



- 2.1 x 5.5 x 11mm right angle barrel plug (high retention) Center Positive

No.71



- 2.5 x 5.5 x 11mm right angle barrel plug (high retention) Center Positive

No.72



- 2.1 x 5.5 x 9.5mm straight barrel plug (high retention, no spark) Center Positive

No.73



- 2.5 x 5.5 x 9.5mm straight barrel plug (high retention, no spark) Center Positive

No.74



- EIAJ#5 style connector Center Positive


No.99



- Micro USB Pin 1 = (+), pin 5 = RTN, pins 2, 3, 4 = NC

These standard output connectors are available for our ME and TE series external power supplies. SL Power has the capability of incorporating other types of output connectors for unique and specific applications. Choosing the right output connector is dependent upon many variables and our team is readily available to provide professional support and guidance: info@slpower.com



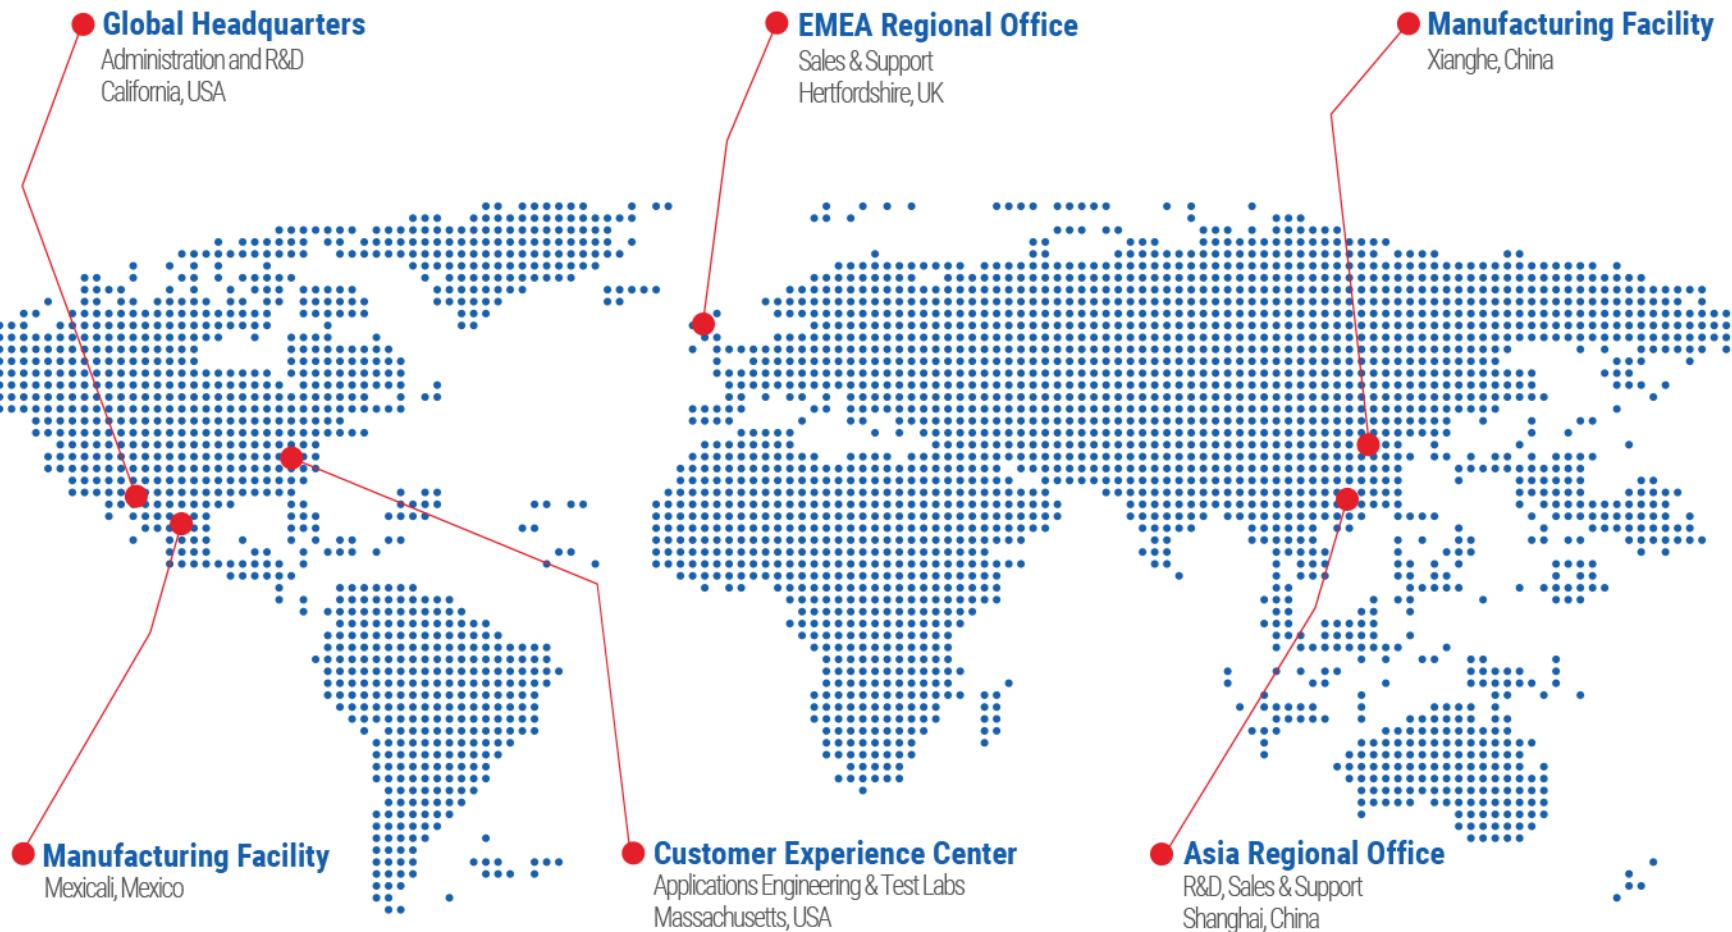

Medical



Test & Measurement



Industrial



LED



Audio Visual



ITF & Comms



Renewable



Military COTS



Display & Signage



Automation



Broadcast

